

American Cinematographer

International Journal of Motion Picture Photography and Production Techniques

NOVEMBER 1975/ONE DOLLAR

PROFESSIONAL

S U P E R



SPECIAL ISSUE: THE 'STATE-OF-THE-ART'

F & B/Ceco. Headquarters for everything Super in Super-8

Professionals are calling upon Super-8 to do jobs that used to be reserved for the larger film formats. Not only is Super-8 doing those jobs, it's doing them as well, for less money and with a lot less bulk.

F&B/Ceco has believed in the future of Super-8 for a long time. That's why we carry one of the largest and most complete lines of professional Super-8 equipment and accessories available anywhere.

Cameras: crystal sync, single and double system.

Sound: crystal sync full coat, cassette and displacement recorders.

Editing: motorized editing benches and flat bed tables.

Projectors: hi-intensity and double band interlock projectors.

Plus an incredibly varied line of accessories and sundries.

And we're authorized Super 8 Sound™, Inc. dealers.

So if it's professional Super-8 equipment, F&B/Ceco has it. And we'll sell it, rent it or lease it to you. Call or write for our free, comprehensive catalog. But whatever you do, don't buy or rent a piece of Super-8 gear until you've gotten a quote from us. Are we on your bid list?



SUPER 8 SOUND Sync Projector

Consists of 2 identical Super 8 sound movie projectors mechanically interlocked to permit stopping, re-starting and transferring sound in perfect sync.



SUPER 8 SOUND Recorder


Records on Super 8 full-coat mag film and combines the functions of location recorder, lab resolver, studio dubber, transfer recorder. Fully compatible with all other sync sound systems, professional or amateur. Pilotone or new digital 1/F sync pulse.



SUPER 8 SOUND Crystal Control

matches the speed of a Super 8 camera to a quartz crystal clock at precisely 24 frames per second, allowing cableless sync sound filmmaking with the Super 8 Sound Recorder and other crystal sync sound recorders.

The Control is 1" x 2" x 2" mounted on a 2"x4" bracket and weighs six ounces. It attaches directly to the camera, which is its power source. No battery, cables or belt attachments encumber the cinematographer. A light-emitting diode indicates proper sync operation.

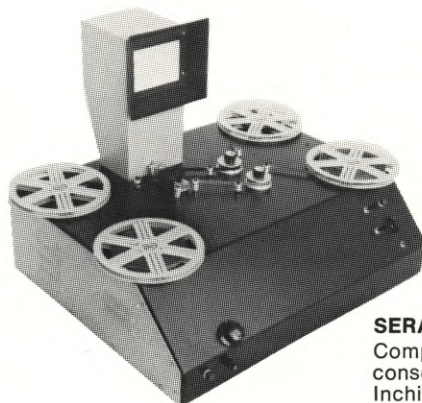

SERA Super-8 Mini-Editor ME-8

Completely portable, 4 plate Editing console. • 3.5" x 5" Fresnel Screen • Inching Knobs • Accepts 1200 ft. reels • Magnetic Sound Head • Forward-Stop-Reverse-Control • Picture & Sound Interlock Switch • Sound Output Jack • Torque Motor on/off with adjust control. **\$1295.00** Send for special brochure and price list of accessories.

We want you to come back.



SALES - SOS DIVISION

315 West 43 St., New York, N.Y. 10036 / (212) 586-1420

7051 Santa Monica Blvd., Hollywood, Calif. 90038 / (213) 466-9361

Phone Toll Free (800) 223-5829. In New York State Phone Collect (212) 586-1420

WHEN
IS
LESS
MORE
?



When? When it's the TGX-16. The TGX-16mm. camera weighs **less** but offers **more**. Weighing **less** than 8 pounds; it offers **more** information on the fibre-optics screen in the viewfinder—**more** speed variation—**more** functions in the hand-grip—and **more** digital footage displays than any other camera. The half-heart cam movement delivers **more** image steadiness at high speed, with **less** noise at sound speed. Advanced engineering in the TGX-16 provides **more** dependability with **less** down time. In short, the TGX-16mm. camera offers **more** but costs **less**. The Angenieux 6 x 9.5 zoom lens means you can shoot in **less** space with **less** light than you ever thought possible. It has a geometric aperture of f/1.6 and a photometric aperture T1.9. The focal length range of 9.5-57mm. makes this the lens for really tight spots. And forget owning **more** lenses, this lens can focus as close as 24 inches from the focal plane to the subject with full zoom capability. There's **more**, lots **more**, write or call

gc general camera
corporation (212) 594-8700
471 Eleventh Avenue, New York, N.Y. 10018



I'm Sy Cane and for those of you who might not have noticed, I am upside down. This causes the blood to rush to my head, giving me an excuse to act irrationally. I'll sell motion picture equipment while on my head at prices that would make me sick if I was upright. And I'm talking about CP-16s and Nagra's. Angenieux lenses and Sennheiser mikes. We carry the leading names in professional equipment. And we back up our sales with professional servicing. Call me right now for a price quote. But hurry. Only a maniac would stay this way forever.



MOBIUS CINE LTD.

7 East 47th Street, New York, N.Y. 10017 (212) 758-3770

American Cinematographer

International Journal of Motion Picture Photography and Production Techniques

The American Society of Cinematographers is not a labor union nor a guild, but is an educational, cultural and professional organization. Membership is by invitation to those who are actively engaged as Directors of Photography and have demonstrated outstanding ability. Not all cinematographers can place the initial A.S.C. after their names. A.S.C. membership has become one of the highest honors that can be bestowed upon a professional cinematographer, a mark of prestige and distinction.

NOVEMBER, 1975

VOL. 56, NO. 11

Herb A. Lightman
editor

Three Tyler
editorial assistant

Barry Day
production control

Pat Black
advertising

Barbara Prevedel
accounting

Gabrielle de Ganges
layout assembly

Lisa Friedman
research

Contributing Editors

David Samuelson

Sidney P. Solow

Anton Wilson

Editorial Advisory Board

Lee Garmes, Chairman

Charles Clarke

Stanley Cortez

George Folsey

Sol Halprin

Winton Hoch

Ernest Laszlo

William Fraker

Conrad Hall

William Margulies

Joseph Ruttenberg

Ted Voigtlander

Vilmos Zsigmond

Editorial-Advertising-

Business Offices

1782 North Orange Drive

Hollywood, Calif. 90028

(213) 876-5080

● **FEATURE ARTICLES**

1252 Professional Super-8: The State of the Art

1253 A Decade of Progress Has Culminated in Super-8 Sound

1255 The Case *Against* Professional Super-8

1258 Double-System and Single-System Super-8 Sync Sound Cameras

1264 Super-8 Sync Sound Recorders

1266 Crystal-Sync Super-8

1270 Super-8 Laboratory Services and Stocks

1271 Professional Super-8 Editing Equipment

1276 Super-8 Sync Sound Projectors

1278 Super-8 to the Summit

1282 The Development of Professional Super-8

1286 Teaching Filmmaking with Super-8 at M.I.T.

1290 Is the 18fps "Amateur" Speed Acceptable for Professional Use?

1292 The Need for Sync Sound Standards for Super-8

1306 Canada's Largest Film Lab Goes Into Super-8

1308 Super-8 Video — A New Production Concept

1310 Super-8 in Television

1312 Transferring Super-8 to Video

● **DEPARTMENTS**

1236 Cinema Workshop

1240 Questions & Answers

1248 The Bookshelf

1297 Industry Activities

ON THE COVER: Multicolored strips of film combine in calling attention to the theme of this special issue of *American Cinematographer*: Professional Super-8, recognizing the fact that the once-amateur narrow-gauge format has come a long way from its humble beginnings. Cover design by DAN PERRI. Illustration by DEBORAH ROSS.

AMERICAN CINEMATOGRAPHER, established 1920, in 56th year of publication, is published monthly in Hollywood by ASC Holding Corp., 1782 North Orange Drive, Hollywood, California 90028, U. S. A. **SUBSCRIPTIONS:** U. S. \$9.00; Canada, foreign, including Pan-American Union, \$10.00 a year (remit International Money Order or other exchange payable in U.S.). **ADVERTISING:** rate card on request to Hollywood office. **CHANGE OF ADDRESS:** notify Hollywood office promptly. Copyright 1975 ASC Holding Corp. Second-class postage paid at Los Angeles, California.

ANNOUNCING the New "Whisper-Quiet"

CINE VOICE 400

the most dependable 16mm Sound Cameras
for the Professional
at a realistic price.

Only
\$1,849.22
list and up



The CORDLESS

AURICON-PRO 400

at only \$2,431.50, and up... with the new Bach Auricon Soundrive-XTL™ Quartz-Crystal Speed Control D.C. Motor, makes it possible to run up to ten 400 foot film magazines on one rechargeable Cine-Pak™ Battery. This new Motor is all electronic... and uses *no* brushes or rotating mechanical contacts of any kind!

Your camera, of whatever make, is no stronger than its weakest link. In battery operated cameras using D.C. motors, the electrical brushes or rotating electrical contacts are usually this "weakest link," consuming up to 40% of the power, by friction, and sooner or later wearing out (or burning out!) and calling for service or rebuilding of the motor. With D.C. motor brushes, this sometimes happens "far from home" or at a most inconvenient time, in the middle of an important "take"! Why take this chance? Now you can have the dependability of the Auricon-Pro 400, with the new Soundrive-XTL D.C. motor!

© BACH AURICON, INC. 1975

Large production with precision tooling makes these Bach Auricon Camera prices possible! Specializing for over 40 years in producing 16mm Professional Sound-On-Film Cameras, counts! Because of this, you cannot judge the Bach Auricon "Talking Picture" Camera by its price—but rather by its exceptionally high merit and the position the Auricon Camera occupies with owners and cameramen around the world.

- Cine Voice 400 Camera Head weighs less than 7 pounds, built of Alumisteel™... will not crack if given hard use that would split Magnesium!
- Every Camera—"Talking-Picture" film-tested before delivery.
- Available for Auricon or Mitchell™ 400 ft. Magazines.
- 60 cycle 117 volt sync. for 24 or 25 F.P.S. available. 50 cycle 120 volt sync. for 24 or 25 F.P.S. available.
- For "Cordless," see Auricon-Pro 400 shown at left. Runs ten 400 ft. film magazines on one "Cine-Pak" Battery. Soundrive-XTL Motor, Quartz Crystal Speed Control, all Gear Drive, Datasync-Pulse for "Double-System" Sound, etc.
- Cameraman can see over top of Camera while operating.
- Filter-slot in Camera Focussaphire™ Film-Gate, with the faithful, silent Auricon Pull-Down Claw, and jewel-sapphire precision Film Guides, for rock-steady pictures (and with Single-system High Fidelity Filmagnetic™ sound when desired!).

Write or call for complete information, also Professional, Dealer and/or Export discounts.

BACH AURICON, INC.

6902 Romaine Street
Hollywood, California 90038 U.S.A.
(213) 462-0931


FIRST IN 16MM PROFESSIONAL
"TALKING PICTURE" CAMERAS SINCE 1931



INTERNATIONAL AND U.S.A. PATENTS SECURED. FOCUSSAPHIRE; AURICON; SOUNDRIVE; ALUMISTEEL; CINE-VOICE; AURICON-PRO; DATASYNC; FILMAGNETIC; TV-T; CINE-PAK, ARE TRADE MARKS OF BACH AURICON, INC.

MAKING IT IN FILM

Rollin Binzer

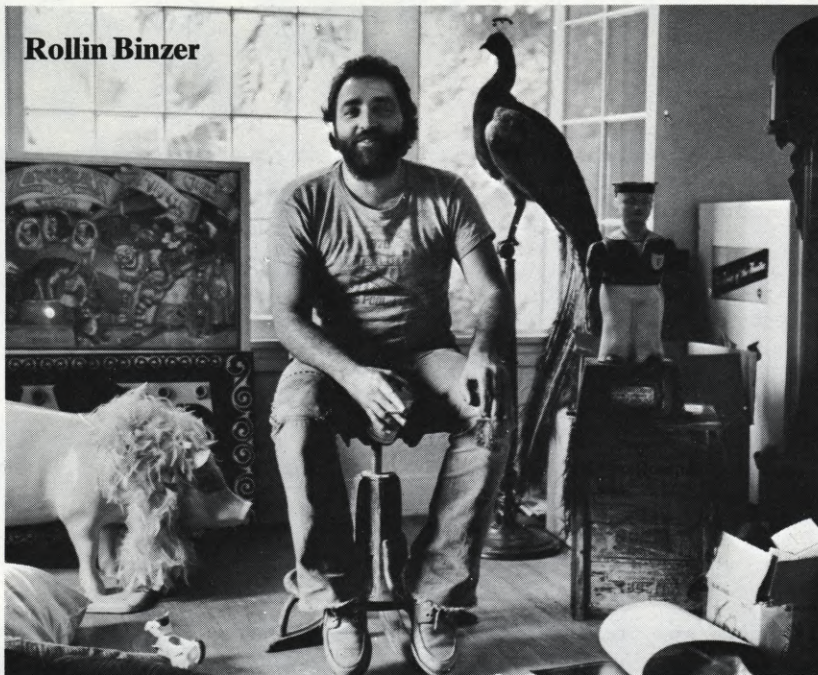

The following is an interview with Rollin Binzer, Director and Co-producer (with Bob Freeze and others) of "Ladies & Gentlemen: The Rolling Stones." The interviewer shall remain Nameless.

N. We heard that working with the Stones on your movie was an experience in futility—that the Stones would cancel recordings the morning after or they'd come and forget why they were there. And that they'd disappear for weeks leaving you and Freeze waiting in London to hear whether they wanted to do the movie or not.

We heard that the movie was finally OK'd by default. That no one said no, and they knew they were paying expenses and session bills for something.

R.B. Yeah.

N. Is it true another director's movie of the same tour finally got shelved because he got tired of waiting for the Stones to say yes or no or show up, and he finally left town?

R.B. Sort of.

N. So you outwaited him?

R.B. Yes.

N. Is it true there's no clear chain of command in the Stones' organization? That there's no manager, but just The Prince, their money guy, and the lawyers, and the head of the record company, but not an actual manager. So when some-

body says "the Stones" want this, or "the Stones" don't want that, it's really a myth?

R.B. That's right.

N. Does that mean they speak for themselves?

R.B. No.

N. Do things only get done by a sort of general drift by the Stones and their organization towards this point or that, or by Mick or Keith or one of the others saying yes or no? Can any of them make a decision, or only Mick?

R.B. Keith if he cares; otherwise Mick does it.

N. So it was Mick who finally OK'd your film, or did it just happen in spite of them all?

R.B. Keith wanted to help us. Mick went along, with a lot of passive resistance.

N. Why resistance? Is it true he thought his act was embarrassing, in such larger-than-life clarity, on the big screen?

R.B. Yes. He never saw it all from a seat before. He was afraid he would bore people.

N. What convinced him to let it out?

R.B. His chauffeur liked it.

N. I think the mixes are better than any mixes of the same songs on the records, or what you hear at a live show. Did the Stones like the sound?

R.B. Keith liked it a lot, after he helped us get it dirty enough.

N. I heard the Stones weren't as interested in having a concert movie as in your quadrasonic concept, a tour carrying all those speakers around and everything. Is that true?

R.B. Maybe.

N. The editing is very controversial, against a lot of people's idea of what editing should be or can do. But I think it's supportive to the mood and rhythms of the music so that the movie is really about the music and not like a newsreel of a concert. Did you have anyone in the Stones organization exerting quality control on editing, or who was even aware that there was editing being done, or that it mattered?

R.B. At one point Mick said, "This is the best editing I've ever seen. Who did this?" And once Keith said, "It's better than the Partridge Family."

N. A lot of reviewers have been impressed with the whole thing, but insist it's not a movie and complain it's not a live concert. In a sense it's the most pure document I've ever seen, without any intellectual intrusions on the amazing filmic reality. And it documents something I've never seen before—the thing you hear on good albums of good musicians doing their music. But I hear the Academy Awards people thought it wasn't a documentary since it took no point of view and had no sociological perspective. Are you surprised at all this?

R.B. No.

N. The quality of the print is superb. The picture is strong enough to support the hugeness of the sound. Your optical house said it was one of the best 16 to 35 mm blowups that was ever done. What was the secret?

R.B. Eastman color negative II film.



Whether you're making it in film—or making it on film, Kodak makes the films that make making it a lot easier. We've made a book of interviews like this with people who've made it in film. Make sure you get one. It's free! Write: 11-11

Eastman Kodak Company

Dept. 640 YF, Rochester, N.Y. 14650

Name _____

Street _____

City _____

State _____ Zip _____

CINEMA WORKSHOP



By ANTON WILSON

FORMAT SIZES

There are a myriad of facts to consider when comparing any two film format sizes. A film format is not merely a set of dimensions, but rather an entire complex system including available cameras, lenses, film stock, processing, editing equipment, projection areas, etc. The points to consider are almost endless and any comparison of film formats must be a comprehensive analysis of these many factors.

However, you have to start somewhere and most format discussions will undoubtedly commence with the question of image area. How big is the picture on the film? The question is basic, but as good a place as any to start.

FIGURES 1 and 2 show the aperture dimensions for Super-8 and 35mm formats, respectively. FIGURE 3 lists these dimensions and those for 16mm. FIGURE 4 lists the areas for the camera, projection, and safe action areas of the three formats. FIGURE 5 gives the percentages of the format areas relative to one another. In the final analysis, the 16mm image is more than three times as large as the Super-8 image, and the 35mm image is more than 14 times that of Super-8. The 35mm image is also between four and five times that of 16mm. In terms of percentages, Super-8 has about 31% the area of 35mm. Likewise, 16mm uses about 22% of the area of a 35mm

FIGURE 1 — SUPER-8 TV SAFE ACTION AREAS

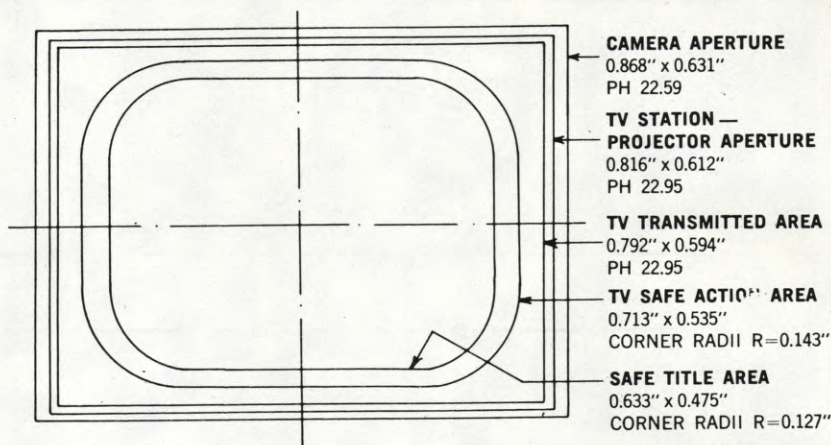
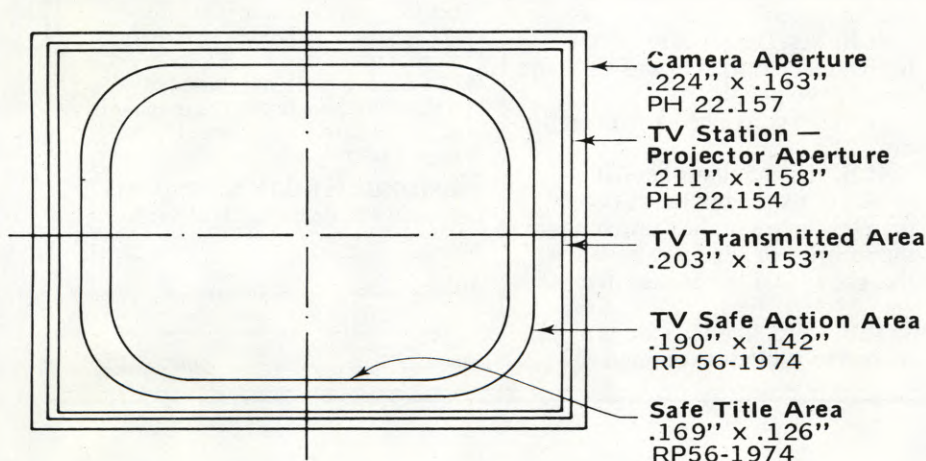


FIGURE 2 — 35mm TV SAFE ACTION AREAS

FIGURE 3 — DIMENSIONS OF APERTURES FOR VARIOUS FORMATS

	Super-8	16mm	35mm
Camera Aperture	.224 x .163	.402 x .292	.868 x .631
Projection Aperture	.211 x .158	.379 x .284	.816 x .612
Safe Action Area	.190 x .142	.331 x .248	.713 x .535
Safe Title Area	.169 x .126	.294 x .221	.633 x .475

FIGURE 4 — IMAGE AREA OF APERTURES FOR VARIOUS FORMATS

	Super-8	16mm	35mm
Camera Aperture	.0365	.117	.548
Projection Aperture	.0333	.108	.489
Safe Action Area	.0260	.0790	.367

FIGURE 5 — RELATIVE IMAGE AREAS OF THE THREE FORMATS

Super-8 relative to 16mm : 31%
 Super-8 relative to 35mm : 6.8%
 16mm relative to 35mm : 22%

image. Of course, all these statistics are in respect to the standard 1.33:1 aspect ratio.

What do these figures mean? Taken alone, not much. The total format system must be considered before any comparisons can be made. Most important is the application. Of course, 35mm will produce a better quality image than Super-8, but for certain applications, the Super-8 image may appear almost as good as the 35mm image for all intents and purposes. Production technique must also be included in the analysis. There may be applications where the Super-8 image is acceptable, yet the production would be more practical in 16mm.

Probably the greatest factor affect-
Continued on Page 1296



Swintek

... the wireless microphone system small enough to be hidden anywhere

The Swintek Wireless Microphone System features a mini-sized transmitter small enough to be hidden anywhere, yet it provides quality sound recording that meets the demands of even the most exacting professional filmmaker. The transmitter weighs only five ounces, will accept any type microphone and can easily be hidden in even the briefest costume. The receiver is fully portable and operates on either AC or DC. Now, with three new type transmitters and three new receivers, Swintek offers a flexibility unmatched by any competitive system. For detailed information on all the Swintek systems, write for our new Swintek brochure today.



The new Swintek Mark 7-50 UHF Wireless Microphone System is licenseable for direct on-the-air broadcasting and features the highest RF output legal for FCC type acceptance.

Worldwide Distributor:

SERVING THE WORLD

alan gordon enterprises inc.



1430 N. Cahuenga Blvd., Hollywood, Calif. 90028

Telephone: (213) 466-3561 • (213) 985-5500

TWX: 910-321-4526 • Cable: GORDENT

Dealers:

Mobius Cine Ltd.
7 East 47th St.
New York, N.Y. 10017
(212) 758-3770

Victor Duncan Inc.
11043 Gratiot, Detroit, Mich. 48213 (313) 371-4920
676 N. St. Clair, Chicago, Ill. 60611 (312) 321-9406
2659 Fondren, Dallas, Texas 75206 (214) 369-1165

Cinequip
41 Scollard St., Toronto, Ontario
Canada M5R 1G1
(416) 920-5424



YESTERDAY'S IDEAS
OF CONSCIENTIOUS SERVICE---
AND TOMORROW'S TECHNOLOGY---NOW.

WRS

MOTION PICTURE LABORATORY
210 Semple Street,
Pittsburgh, Penna. 15213
Phone 412 687-3700


**color
tech**

FILM LABORATORIES, INC.
640 N. Broad Street,
Philadelphia, Penna. 19130
Phone 215 236-9100

THE END OF HALF OF YOUR EDITING PROBLEMS.

Whatever your editing problem, whatever your preference in equipment, knowing where to put your hands on exactly the right gear, whenever you need it, certainly solves half your problems. So at Camera Mart we always maintain, in stock, the most comprehensive,

most diversified, most up-to-date, best maintained array of editing equipment in the East. And whether you buy from us, rent from us, or take a long-term lease, you can expect more for your money than if you got it elsewhere. (Providing, of course, that you *could* get it elsewhere.)

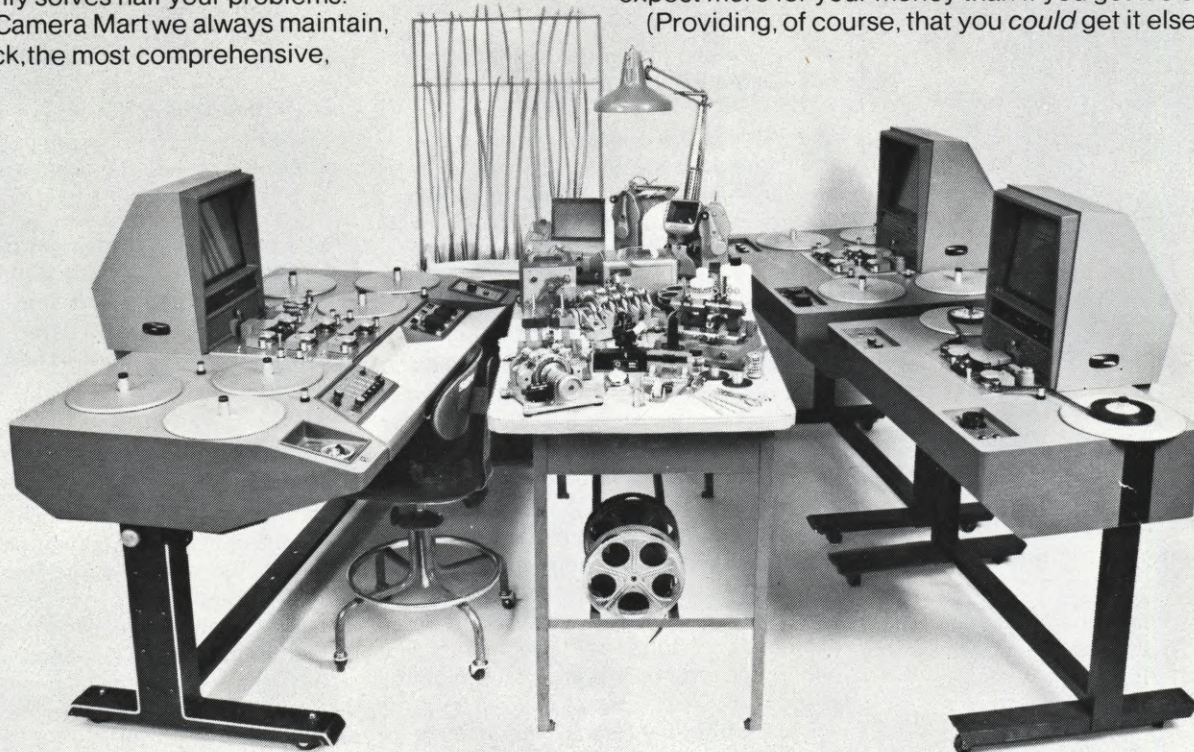

THE END OF THE OTHER HALF.

But availability of the right equipment when and where you need it solves, as we said, only half your problem. The other, equally important half is *where* you get it. The *people* you buy, rent or lease from. Are they experienced enough to really know what the job needs? Are they qualified to recommend a piece of gear even better suited than what you had in mind? Are they ready, willing and able to make suggestions that'll save you time and money? When you deal with Camera Mart, the

answer to all these vital considerations is an emphatic yes. What's more, we never let a piece of equipment out of the house unless and until it's been thoroughly checked and re-checked. *Even if it's factory fresh.* Because the best piece of equipment in the world isn't going to do you a bit of good unless it's ready to do the job when it gets to the job. So the next time you come up with an editing problem, come up to Camera Mart. We promise you'll go out the door with a solution.

CAMERA MART 456 West 55 Street New York, N.Y. 10019

You make sense. Tell me more about how Camera Mart can solve both halves of my editing problems.

NAME _____ TITLE _____

COMPANY _____

ADDRESS _____

CITY _____

STATE _____ ZIP _____

© 1974, Camera Mart



CAMERA MART


THE CAMERA MART, INC.

456 W. 55th St., New York, 10019 (212)757-6977

SALES-SERVICE-RENTAL



PLAIN TALK

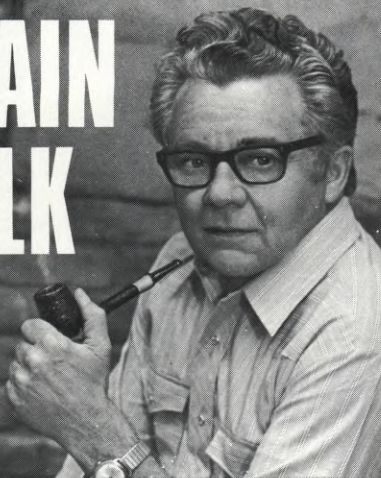

by *J. Carl Treise*

If a processor has to be modified beyond Kodak specifications, to give you the speed you want, don't buy it.

It's no trick to increase the film speed of a processor. All you have to do is raise the temperature, thus decreasing the development time.

However, when you do this, you're exceeding the specifications provided by Kodak for processing color films.

Maybe you can get away with it for awhile. But sooner or later, something will go wrong and when that happens, you've got no one to blame but yourself.

To put it bluntly, whenever a firm persuades you to buy a modified unit, you're asking for trouble.

How do we know?

We not only build processors, we rebuild them, too. And most of the units we're asked to work on belong to people who "bought a pitch" and then later came to us for advice on how to get out of the jam they found themselves in.

This kind of talk won't stop people who are interested only in price. But it might make a difference to those of you who are willing to spend a few extra bucks for a processor you don't have to "push" to give you the speed you want.

In the long run, you'll save money, as well as a lot of grief.

**TREISE
ENGINEERING, INC.**

1941 FIRST ST. • SAN FERNANDO, CALIF. 91340
PHONE: (213) 365-3124

QUESTIONS & ANSWERS

Conducted by CHARLES G. CLARKE, ASC.
and WINTON HOCH, ASC.



(Inquiries are invited relating to cinematographic problems. Address: Q. & A., AMERICAN CINEMATOGRAPHER, P.O. Box 2230, Hollywood, Calif. 90028.)

Q How can I produce a night effect in the daytime using color film?

A This is the question we most frequently receive, and though the answer has been given many times, still the key to the question is to *under-expose two stops*. Additional techniques which assist the illusion are to photograph the scene in back-light, using lights or reflectors as fill lights on the players. When such are not available, use front cross-light. By all means avoid any white sky in the scene. You may use a 85N6 filter, but disregard its factor. The N6 (Neutral density — 6 transmission) portion of this filter will reduce the light transmitted by two stops. Therefore, you judge the exposure as if you were using the normal #85 filter for a *day* exposure; the N6 portion cutting two stops will produce the underexposure necessary for a night effect.

It will further the illusion if you can include in the scene some light source — such as lighted windows or street lamps. These must be boosted by using photoflood lamps — using tracing paper or Bon Ami on the glass of the windows to diffuse the light from the naked globes.

Q I would like my Main Title to appear over live action scenes — having the text appear in white letters over the scene. What is the simplest method for doing this?

A This is best accomplished by the process known as *Bi-Pack printing* in which the developed title film negative is placed in contact with the developed positive background scene. Both are printed together on duplicating negative film stock — by one pass through the printer. The same bi-pack idea may be employed directly in the camera by threading the negative title film in front of the negative color film stock. The background scene is then photographed — such as waves breaking on white sand. The actual fade-in and out footage frames having been measured from the title negative (with sufficient footage in front for threading), the camera is faded in and out at these same positions. In this last

case, the text will appear in *black* letters over the light background. It is best to photograph the titles on positive film for maximum contrast and clear film surrounding the lettering.

Q I read that professional cinematographers normally light their sets at a predetermined foot-candle level. Why is this, and what is the difference between foot-candles and candles-per-square-foot?

A Motion picture sets are illuminated for a definite light level measured in foot-candles. The intensity of the light and the lens opening will vary with the speed of the film being used — and effect desired. The professional is only concerned with the incident light available — not with the reflective aspect of the players' clothing, backgrounds, etc., unless these are of a particularly light or dark tone — in which case exposure compensation may be required.

The term "foot-candle" is used in connection with the *intensity* of illumination at a given location. It is entirely dependent upon the intensity of the light source and its distance from the subject. Foot-candles are measured with an incident light meter.

The term, "candles-per-square-foot" is used in connection with the *brightness* of an illuminated surface. It is dependent upon the intensity of illumination on the surface *and* the inherent diffuse reflectance of the surface. Many reflected-light meters read in candles-per-square-foot.

Q I have to photograph a "Dow Board" in our local stock exchange. This is a black-light apparatus — and is just barely visible. How might I obtain an insert shot of this board in color?

A Use color negative — or equivalent 16mm high speed film and the fastest lens you can obtain. Request your laboratory to force develop your negative *one stop*. You may run your camera at 12 frames per second to obtain more exposure and also to speed up the action of the legend being spelled out on the board.

THE ALL NEW BOLEX EL! IT'S ELECTRONIC.

We built this camera with every essential feature successful professionals use to create outstanding 16mm commercial films. Yet until now these same pros have had to pay thousands more for these same advantages—without having them in one camera.

Now, study each Bolex EL feature carefully. Inspect the camera inside and out. Compare the price, quality and features of our camera with any other 16 available. Then choose your very own Bolex EL. And go out and experience camera performance.

And, with the Bolex EL, a pro can film more easily and get superb results. As a matter of

① Crystal control motor for wireless sync sound. Other motor speeds from 10 to 50 fps forward and reverse, controlled by solid state electronics. Automatic slating with sync-pulse generator. ② Rechargeable battery that adds a mere 13 oz. to the weight and attaches right to the camera. ③ Technologically, the most advanced through-the-lens metering system. The silicon cell has no memory. So it reacts instantly, responds uniformly to all colors and is practically unaffected by temperature changes. Rugged, accurate and reliable. ④ Light-emitting diodes indicate correct exposure in bright 13X reflex finder. The completely electronic system has no mechanical parts or moving needles that can fail due to rough handling. Lighted diodes are always visible even in dim light. ⑤ Electro-magnetic control for instant start and stop with shutter in closed position. ⑥ Electronically controlled single frame capability assures the kind of accuracy and reliability found only in specially built animation units. ⑦ Superb picture steadiness to satisfy the demands of the most discriminating pro. ⑧ The lens mount is so rugged and well-engineered you can safely carry the camera by the lens. ⑨ Automatic threading and spool ejector for swift change of film. ⑩ Complete line of superb optics: macro, power zoom, lenses with fully automatic exposure control, automatic depth of field scales, automatic diaphragm pre-setting, super fast f/1.1 aperture. • Professional accessories include 400' magazine, matte box, blimp, shoulder brace, u/w housing and many more. Bolex also has four H16 cameras, accessories and Bolex 421 optical/magnetic sound projector. Write for full-color brochure and catalog and tell us if you'd like to see a film we produced about the EL.

BOLEX

Paillard Incorporated
1900 Lower Road, Linden, New Jersey 07036
In Canada: W. Carsen Co. Ltd., Don Mills, Ontario.



the convincer



The undeniable evidence of your own professional ear can leave no doubt in your mind. Once you have heard the plainly evident difference in sound quality between this new recorder/dubber and all others, you will never again be satisfied with anything less than the true

series 3000



The new series 3000 solid state insert recorder

Unequaled in sound quality by any other sprocket-drive unit on the market *at any price*. And the lowest-priced unit that offers these time and money-saving features: 1) Insert capability—just erase and re-record any desired section of track. 2) Multiple-track mixing—lets you mix 3 tracks *on one 4-track unit*. 3) Extra-wide frequency response. 4) *Extremely* low noise and distortion. 5) Solid state efficiency. 6) Trouble-free, dependable—built to handle constant heavy work loads. 7) Simple conversion kits, completely pre-aligned for Magnasync/Moviola series 2200 owners. Call or write for information and name of nearest dealer.

magnasync/moviola
corporation

A Subsidiary of Craig Corporation

magnasync

moviola

5539 RIVERTON AVENUE / NORTH HOLLYWOOD, CALIFORNIA 91601 / (213) 877-2791



TITLE DESIGN
DAN PERRI


DAN PERRI
FILM DESIGN
GRAPHIC DESIGN
1334 WESTWOOD BLVD.
WESTWOOD, CALIF. 90024

OXBERRY puts the Masters touch into the Filmmaker

The Master Series Camera is used by more professional studios around the world than all the other animation cameras put together. This record has been achieved for a very good reason . . . performance . . . This camera is now the heart of the new SUPER Filmmaker animation stand. The SUPER-F is a hybrid combining proven Master Series performance with the low-cost of the versatile Filmmaker animation stand.

Some outstanding features of the SUPER-F are:

- Master Camera 5420-00, rackover type with interchangeable components for 35, 35-32, 16, super 16, 8, and super 8mm formats with fixed pin registration.
- Automatic fade and dissolve mechanism (8 to 128 frames) with logarithmic fade and sinusoidal dissolve cams.
- Registration pin plate with 16 or 35mm pins and precision reticle.
- Multi-speed, stop motion animation motor with frame counter
- Bi-pack capability with four motor take-up.
- Automatic follow focus mechanism down to 1:1 and disengageable for manual focusing and special effects. Available with 28mm and 55mm Micro-Nikkor lenses.

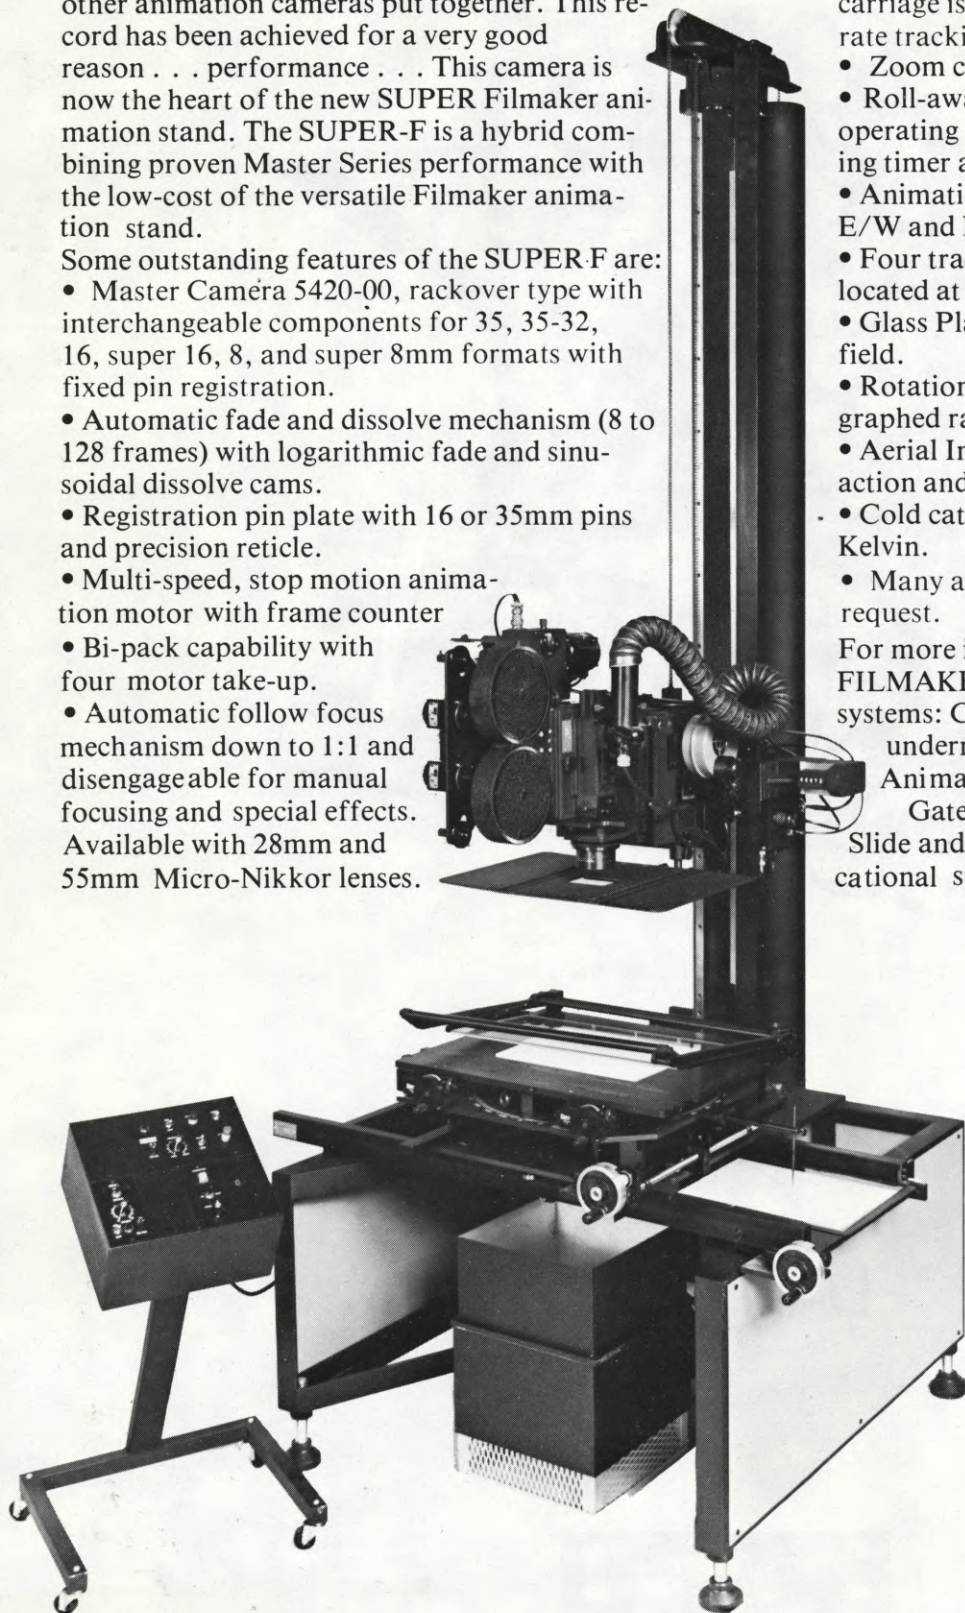

- Animation Stand is self supporting with maximum overall height of 9.6 ft. The camera carriage is ball bearing mounted assuring accurate tracking with variable motorized zoom.
- Zoom counter and scale.
- Roll-away control console, containing all operating controls for camera and stand including timer and predetermined counters.
- Animation compound and pantograph with E/W and N/S movements.
- Four track table top with two peg tracks located at 12 field and two at 18 field.
- Glass Platen locks in up position for 12 or 18 field.
- Rotation permits spin effect to be photographed rapidly.
- Aerial Image capability for combining of live-action and cel animation.
- Cold cathode, 12 field backlighting at 3200° Kelvin.
- Many additional options available on request.

For more information about the new SUPER-F FILMMAKER and other OXBERRY production systems: Computer Animation Stand with underneath Aerial Image; Master Series Animation Stand; Optical Printers; Liquid Gate; Media-Pro 8 & 16mm Animation, Slide and Filmstrip system; Animator-8 educational stand and many accessories write to:

OXBERRY®

A Division of Richmark Camera Service
516 Timpson Place, Bronx, N.Y. 10455
Tel. (212) 585-0730 Cable Oxberry, N.Y.
Telex No. 422250 RCS


Only Beaulieu builds Super-8 motion picture cameras to the standards usually associated with professional 16mm cameras like Eclair and ARRI. The price is correspondingly high, about what a professional would expect to pay for professional equipment. Which one of them is the finest? That depends on what *you* need. There are small but significant differences between the two cameras. The new 5008S has both single and double system sound capability. Its single system records high fidelity sound directly on the film. (Frequency response: 50-12,000 Hz \pm 1.5 dB at 24

fps; distortion: less than 0.75%; signal to noise ratio: 57dB; wow and flutter, attenuated peak: less than 0.4%.) That should make it a TV news cameraman's dream, weighing in at about six lbs. with lens. If you prefer double system sound, you can plug your Nagra, Stellavox, or Super-8 Sound Recorder into either camera model. The 4008ZMII has double system sound capability and if you don't need single system mode, you can save some money. The 5008S is shown here with f1.2, 6-to-80 Angenieux zoom lens (a 13-to-1 zoom ratio). The 4008ZMII has the Schneider F1.8, 6-to-66 zoom lens. They both have C mounts and will enable you to use many of the lenses you now have for

16 or 35mm. Now that Super-8 has grown up and turned pro, it's worth your while to give it a look. Take the time for a leisurely demonstration at a franchised Beaulieu dealer. Or write to Department AC, Hervic Corporation, 14225 Ventura Boulevard, Sherman Oaks, CA 91423 for information and complete specifications.

Beaulieu *Incontestably the finest*

One of these
is the world's finest
Super-8 motion picture camera.

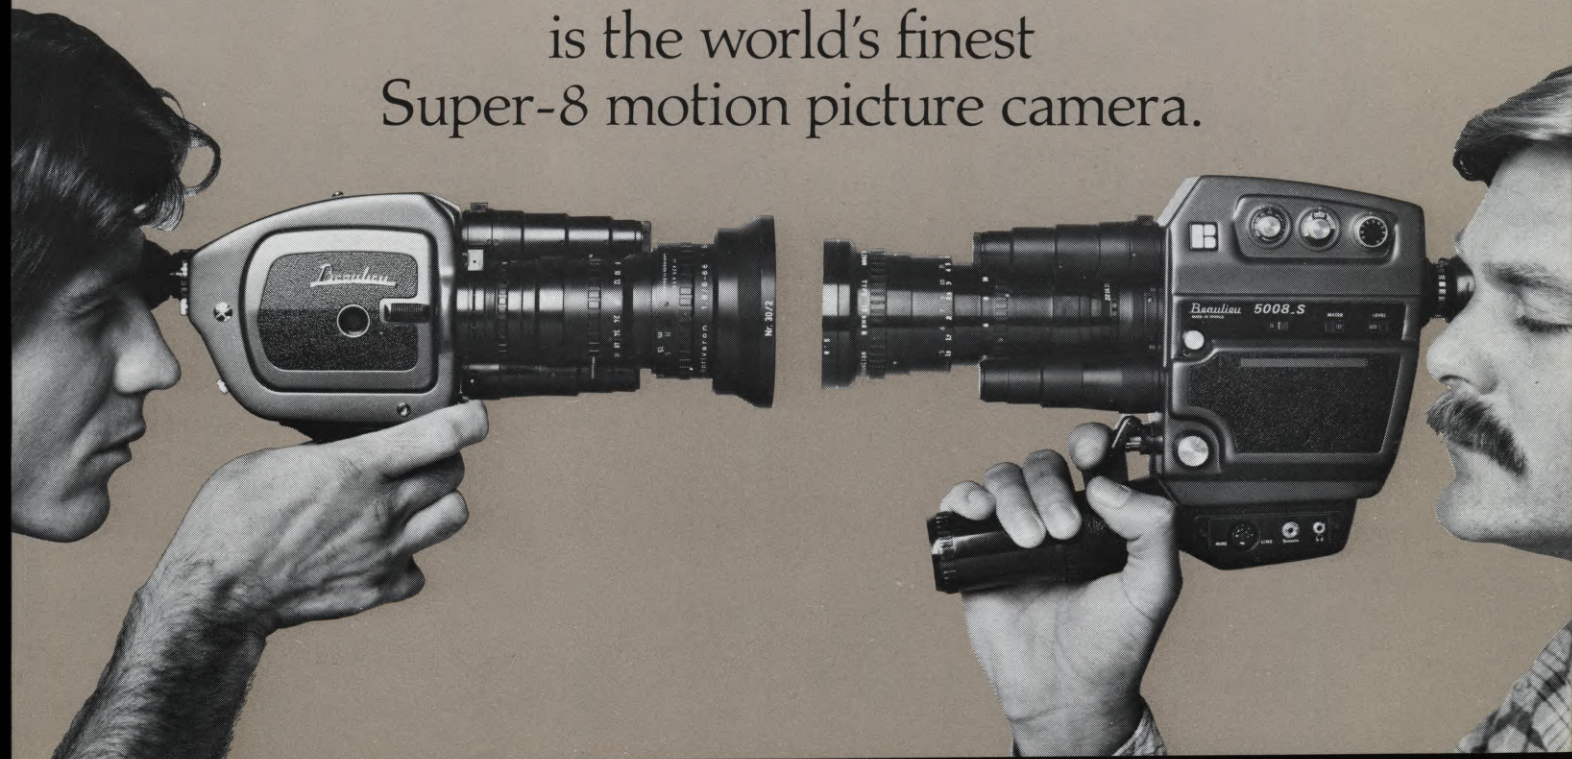

Victor Duncan knows only one standard, Excellence

The gleaming chrome of Victor Duncan's priceless antique car collection reflects the same quality of craftsmanship which has served the motion picture industry with precision equipment for fifteen years. The pride that compells him to re-furbish classic automobiles also leads him to test and re-test every piece of equipment leaving his shelves. A cinematographer of the highest caliber,

Victor Duncan realizes that sophisticated equipment, like a meticulous engine, must be painstakingly tuned and tested to achieve unexcelled reliability. The kind of reliability he expects from the '55 Chevy he drives to work daily or the motion picture camera he's filming with. That standard is excellence. For Victor Duncan, it's the only standard. **And we're proud of it.**



Member Professional
Motion Picture
Equipment Association

VICTOR DUNCAN, INC.

Rentals, Sales, Service

676 N. St. Clair, Chicago, Illinois 60611
(312) 321-9406

2659 Fondren, Dallas, Texas 75206
(214) 369-1165

11043 Gratiot, Detroit, Michigan 48213
(313) 371-4920



... the check and double check people

Professional eyes can't be fooled.

A professional can see through anything that isn't up to professional standards.

And what a professional sees in GEVACOLOR TYPE 985 Print Film meets and surpasses even his most critical requirements in a print film. Because Agfa-Gevaert has a tradition of providing only the highest quality professional material.

GEVACOLOR TYPE 985 Print Film provides the professional with a product that consistently delivers pin-point sharpness and honest reproduction from originals. And it's

fast and problem-free in every lab using current processing methods.

GEVACOLOR TYPE 985 Print Film has earned the reputation of being "technically perfect" throughout the world. It's just one more example of Agfa-Gevaert's top-grade materials for television and cinematography. For professional eyes.

If you'd like to know more about our Motion Picture products, write to: Motion Picture Department, Agfa-Gevaert, Inc., 275 North Street, Teterboro, N.J. 07608.



SYSTEMS FOR PHOTOGRAPHY • MOTION PICTURES • GRAPHIC ARTS • RADIOGRAPHY • VISUAL ARTS • REPROGRAPHY • MAGNETIC RECORDING

PLC-4 Magazine

The most advanced design
in 16mm 400 ft. magazines.



FEATURES:

- The PLC-4 magazine is made of extremely lightweight, glass-filled Lexan®, a material with greater impact strength than magnesium.
- Hinged magazine doors provide quick access for fast loading and unloading.
- Two thumb-activated latches on each magazine door guarantee positive safe closure.
- Compartment-type magazine design permits the use of either 200 ft. or 400 ft. darkroom cores or daylight-loading spools.
- The relatively square configuration of the compartment makes it easy to remove a daylight-load spool.
- Magazine may be fastened to the camera by conventional screwdown methods or the unique Cinema Products snap-latch technique.
- The molded plastic PLC-4 magazine completely eliminates the problem of film spotting caused by particles of magnesium adhering to the emulsion and then reacting in the developing bath.
- The PLC-4 magazine is extremely silent in operation.



PLC-4 Magazine shown mounted on a CP-16R Reflex camera.



PLC-4 Magazine shown mounted on an Auricon CineVoice Camera (400 ft. Conversion model).

MAGAZINE COMPATIBILITY

PLC-4 MAGAZINES ARE COMPATIBLE WITH ALL 16MM CAMERA SYSTEMS WHICH ACCEPT STANDARD 400 FT. MITCHELL-TYPE MAGAZINES.

For further information, please write to:

cinema E products
CORPORATION

Technology In The Service Of Creativity

2037 Granville Avenue, Los Angeles, California 90025
Telephone: (213) 478-0711 ■ Telex: 69-1339 ■ Cable: Cinedevco

THE BOOKSHELF

By GEORGE L. GEORGE

MOVIE MACHISMO PHOTOGRAPHY

Although women's liberation is generally accepted both as a concept and a fact, too few cinematographers get the opportunity to film stories that truly depict the new man/woman relationship. The great majority of scripts today still emphasize the "he-man" mystique, much as was done in the past.

A nearly perfect example is *BRONSON!*, W. A. Harbinson's biography of the actor. The film personality of Charles Bronson is practically 100% *macho*, and this story of his life and career follows closely his growth as an individual and as a hot box office attraction. (Pinnacle \$1.50)

Clive Hirschhorn's *GENE KELLY* is a subtle portrait of a gifted artist — actor, choreographer, director — whose male charm and self-assurance were used to put the ladies in the proper submissive state. (Regnery \$11.95)

Even more suave, *LAWRENCE OLIVIER*, as portrayed by John Cottrell, is a perfect integration of the man and the actor, the "total performer" whose life inevitably reflects some aspects of the parts he plays — and vice-versa. (Prentice-Hall \$10.95)

That epitome of worldly savoir-faire, Noel Coward, ranked high both as smooth actor and clever playwright. William Marchant's delightful memoir, *THE PLEASURE OF HIS COMPANY*, aptly describes the nuances of Coward's attractive personality. (Bobbs-Merrill \$10.)

In *THE CINEMA OF DIRK BOGARDE*, Margaret Hinxman and Susan d'Arcy highlight the actor's versatility in such contrasting characterizations as the equivocal master in *The Servant* and the sado-masochistic Nazi in *The Night Porter*. (Barnes \$12)

Directors, like actors and cameramen, also have inter-changeable character facets enabling them to adapt to disparate people. In *HITCHCOCK*, George Perry offers a well illustrated study of the director's personality as it affects his story-telling techniques and visual concepts. (Doubleday \$7.50)

The changing image of the cowboy is

assessed by Ralph and Donna Brauer in *THE HORSE, THE GUN AND THE PIECE OF PROPERTY*. This is a thoughtful and informative study of the interplay between our life patterns and their visualization on the TV screen. (Bowling Green U. Press, Bowling Green, OH 43403, \$10./4.)

* * *

AND NOW THE LADIES

A common complaint among actresses is that nowadays there are few good roles for women. Maybe so, but cinematographers prove they make them look good, no matter what.

A good example from the past is seen in *THE AMERICAN MOVIE GODDESS*, edited by Marsha McCreadie. Skillfully assembled articles and essays as well as song lyrics, stills, ads and sundry artifacts explore the impact of Garbo, Hayworth and Monroe on U. S. popular culture. (Wiley \$3.75)

Norman Mailer's biography *MARILYN*, now in paperback, is an almost novelized account of Monroe's life and death. It still speculates about her alleged involvement with the Kennedys — a typical example of the reality versus fantasy syndrome. (Warner \$2.50)

This theme is further expanded in *MARILYN: THE LAST MONTHS*, wherein Monroe's housekeeper and companion Eunice Murray (with Rose Shade) confirms the actress's emotional instability and recurring confusion between life and dreams. (Pyramid \$1.75)

Although writing primarily about a popular video star, George Carpozi, Jr., in *THE CAROL BURNETT STORY*, stresses that her performance in the film *Pete 'n' Tillie* gave her a chance to demonstrate her ability in a dramatic role. (Warner \$1.50)

A biography of yet another TV star (slated for an early movie debut), *CHER!*, is a gushy tale wherein Vicki Pellegrino rhapsodizes over the multiple endowments of the attractive performer. (Ballantine \$1.50)

Despite difficult beginnings and a stormy private life, Jessie Matthews achieves, in her autobiography *OVER MY SHOULDER*, a balanced view of the British entertainment world, combining homiletic philosophy with vivaciously recounted memories. (Arlington \$8.95)

* * *

BOOKS INTO FILMS INTO BOOKS

Three notable additions to the Indiana University Press Filmguide series include Carol Reed's *ODD MAN OUT* by James de Felice, Fellini's *8½* by Ted Perry and Riefenstahl's *TRIUMPH OF THE WILL* by Richard Meran Barsam. Each contains an outline of the film, basic facts about its makers, a summary of reviews and bibliographical data. (\$6.95/1.95 ea.)

Director John Cassavetes' screenplay *MINNIE & MOSKOWITZ*, written by him directly for the screen, is a moving study of loneliness that comes out vividly in the printed text. (Black Sparrow, Box 25603, Los Angeles, CA 90025, \$15/4.)

In *GOD, MAN AND ARCHIE BUNKER*, Rev. Spenser Marsh reprints some of the more outrageous — and funny — remarks of the bigot-hero of "All in the Family", drawing optimistic conclusions in support of his theological views. (Harper & Row \$5.95)

Carl Gottlieb's informal, detailed diary, *THE "JAWS" LOG*, tells strikingly how that spectacular film was made. He was co-scenarist with *Jaws* author Peter Benchley. (Dell \$1.50)

The brouhaha caused in Edgartown, Mass., by the filming of *Jaws* is wittily reported by a local resident, writer Edith Blake, in *ON LOCATION . . . ON MARTHA'S VINEYARD: THE MAKING OF THE FILM JAWS*. (Lower Cape Publ., Box 901, Orleans, MA 02653, \$5.; also Ballantine \$1.50)

Nancy Warfield's astute analysis of John Ford's 1962 film, *THE MAN WHO SHOT LIBERTY VALANCE*, appraises the director's visual methodology, his exegetic use of Plato's philosophy and his ambivalence toward the film's moral lessons. (Cinemabilia, 10 W. 13 St., NYC 10011, \$4.95)

* * *

A MIRROR OF OURSELVES


Michael Woods invites us to have a look at our screen image in his probing, lucid *AMERICA IN THE MOVIES*. Reflections of the myths and realities of our existence are ticked off with an uncanny awareness of our collective ego. (Basic Books \$10.)

A worldwide perspective of society as viewed by the camera is afforded in *FLASHBACK: FILMS AND HISTORY*, a UNESCO symposium where international scholars assess the relationship between their countries' development and its representation on the screen. (Unipub, \$20./7.)

KEM UNIVERSAL

A Unique, Modular, Extendable Editing System — Quickly Interchangeable For All Film Formats.

Multiple screens and tracks let you weigh the full balance of images dialogue, music and effects.

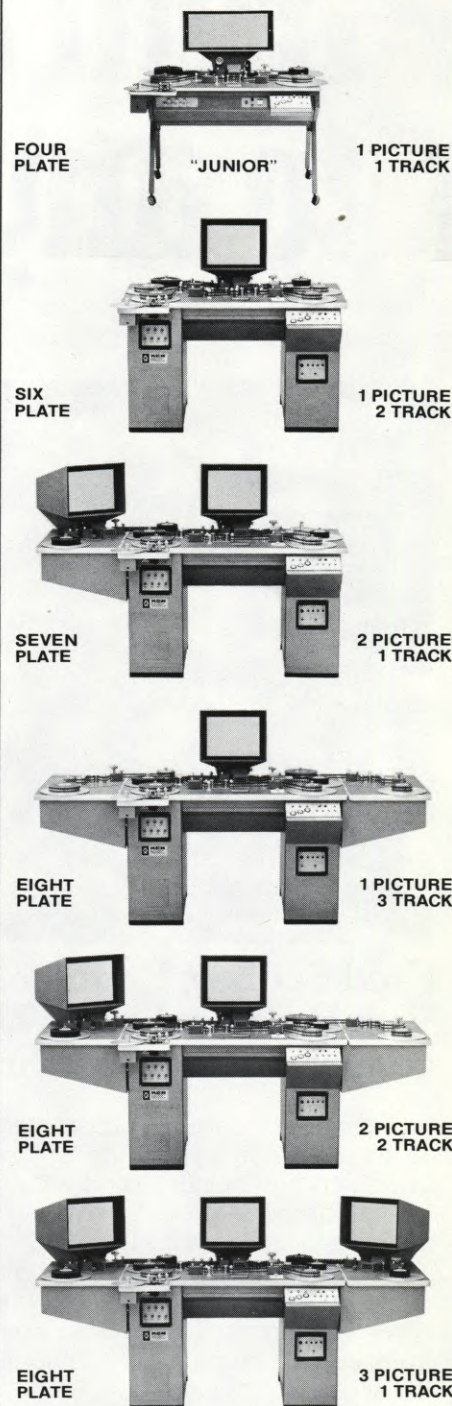

Eastern United States:
MM Editing Systems Inc.
 321 West 44th Street, New York
 New York 10036 (212) 582-1681

Western United States:
KEM Editing Systems Inc.
 6253 Hollywood Blvd, Hollywood
 California 90028 (213) 461-4143

"We take anything from anything to anything..."



Fred Scobey, Engineering Vice President, talks about visual communications technology.

"Probably most of our customers would agree that all color labs do a pretty decent job... there's a lot of good product being turned out today. But no other lab can offer the consistent quality and range of services maintained by DeLuxe.

"We have the finest optical engineers in the business—professionals who can take 70mm to 35 to 16 to Super-8, transfer video tape to film without the slightest

distortion because they know exactly what they're doing. Panning, scanning, squeezing, unsqueezing, reducing, enlarging, changing aspect ratios... everything you want done is accomplished with extreme care, artistry and speed.

"For example, our color correction system is the most sophisticated in the business. In evaluating the negative on the video color analyzer, we arrive at the specific exposure conditions necessary to go direct to the printer—exactly the way we want it... the way you want it. These calibrations are automatically fed onto a tape, cranked through the printer and the result is a new negative with flawless color correction.

"Our lab is an integrated system—computer controlled to avoid inconsistency of any sort. For example, every tenth print off each printer goes to the control room where it is analyzed and compared with the master test reel. Our quality control system is so precise you could not tell the difference between prints of the same film, same reel, made at any of our facilities around the world.

"We are a visual communications organization. Whatever form visual communication may take we must stay ahead of the technology. I guess that's why we turn out the best product this industry has to offer."

Let us improve your image—

de luxe laboratories
DIVISION OF **de luxe general** INCORPORATED



Hollywood, 1546 North Argyle Avenue, Hollywood, Ca. 90028 (213) 462-6171
New York, 630 Ninth Avenue, New York, New York, 10036 (212) 489-8800
Chicago, 2433 Delta Lane, Elk Grove Village, Ill. 60007 (312) 569-2250

CUT YOUR PRODUCTION BUDGET ALL YOU NEED
IN EUROPE -
ARRI RENTS IT!



ARRIFLEX 35 BL
with 1000 ft magazine and
extension eyepiece

Cameras: 16, Super 16, 35 mm · Lenses ·
Sound · Dollies · Lighting ·
Continental Helicopter Mount · Transport ·
Studio · Laboratory · Editing
Viewing Equipment

Anything that has to do with filmmaking.



ARNOLD & RICHTER KG
Rental Department

Send for our free catalogue
Contact: Heinz Feldhaus

8 Munich 40 · West Germany
Türkenstrasse 89

Phone 3809306, 3809316, Telex 524317 arri d

PROFESSIONAL SUPER-8: THE STATE OF THE ART

Ten years ago predicting a professional future for the patently "amateur" Super-8 format drew scornful laughter, but now it is an accomplished fact

By HERB A. LIGHTMAN

As far back as 1966, *American Cinematographer* stuck its editorial neck out by predicting that the then-quiet-new Super-8 format would not only enjoy a boom of popularity among amateur film-makers, but that it would ultimately come to be accepted as a professional medium, *for certain specific applications*.

This prediction was greeted with amusement, if not disdain, in most knowledgeable circles — and understandably so, if one were to consider only the obvious facts. Detractors, often referring to the narrow-gauge film as "sensitized string", scoffed at the idea that it could ever offer anything more than an idiot-proof format for the home movies market. It is also quite possible — although we have no way of knowing for sure — that even Eastman Kodak never envisioned it as anything more than a vastly improved format for the highly lucrative mass amateur market.

By the time the special "SUPER-8: THE STATE OF THE ART" issue of *American Cinematographer* appeared in December, 1969, it was already becoming obvious that the spunky little Super-8 format was refusing to "stay in its place" as a strictly amateur play-toy. Despite the wait-and-see inertia maintained by Eastman and an appalling lack of standardization promulgated by greedy equipment manufacturers, Super-8 was being forced into use as a professional medium — *for certain specific applications* — by innovative film-makers all over the world.

In the six years that have elapsed since then things have changed radically. There is no longer any question as to *whether* Super-8 will be accepted as a professional format. It is a fact — like it or not, and one is tempted to say: "You've come a long way, Baby!"

Just *how far* Super-8 has come as a professional medium is the reason for this current special issue of *American Cinematographer*. The intent is to report in detail the significant advances in equipment and techniques that have made possible the acceptance of Super-8 as a professional medium — *for certain specific applications*.

We purposely and repeatedly emphasize that latter phrase because certain realities must be faced in order not to confuse the issue — namely that there is no way that a Super-8 image

will ever look as good as a 16mm image of the same subject. There is no way that a 16mm image will ever match the quality of a 35mm original, just as 35mm will never capture the detail of 70mm. This doesn't mean, however, that a professional cinematographer shoots 70mm whenever he can afford it. While one eye is looking through the viewfinder, the other eye must be looking at the image in the way that the audience is going to see it. The fact is that, in terms of total viewing time, 90% of today's audiences are going to see film images on television screens with a maximum diagonal size of 25 inches.

More and more cinematographers who release for the small screen use 16mm in original production rather than 35mm simply because it has proved to be economical and of good enough quality to satisfy themselves and their clients. It is also a combination of simple economics and "adequate" image quality that is causing many television stations to drop film production entirely in favor of videotape production. A key question raised by many of the writers of this special issue of *American Cinematographer* is whether Super-8's extremely low-cost can compromise with the effect of a slight sacrifice in image quality, in order to produce a "cost-effective" medium that will keep the techniques of cinematography active in original productions for television, as well as lower the production costs in many non-theatrical films.

The "cost" part of the answer to the question of Super-8 "cost-effectiveness" is to be found in a simple budget analysis of any film production. That part of the budget allocated for equipment and film stock is the primary part influenced by the gauge or format decision. Some sound costs, lab transfers and studio mixes, are reduced by the techniques used in Super-8 sync sound equipment, which allow the filmmaker to do his own sound work. A typical non-theatrical film production budgets only about 10% for equipment and expendables, the balance consisting of research, scripting, talent, crew, travel, etc. Even if Super-8 stock costs only one-third as much as 16mm; even if Super-8 location, editing, and studio equipment costs only one-fifth as much as comparable 16mm equipment; and even if Super-8 video transfer equipment costs only one-tenth as

much as 16mm, the saving is still limited to a small fraction of the total budget.

Since not all productions are typical, it is likely that those film productions with budgets consisting of more than 50% equipment and expendables will be first to use Super-8 as their original medium. This, of course, includes the many situations where the final film is not actually sold to anyone, such as filmmaking classes, in-house audio-visual groups, and even professional producers who might shoot a Super-8 "pilot" rather than invest a comparable amount in a static storyboard. But even with a clear cost advantage, a careful decision to go Super-8 must also include the "effect" side of Super-8's cost-effectiveness.

The comprehensive equipment review presented in this special issue on Professional Super-8 will convince knowledgeable cinematographers that virtually every production and post-production technique of sync sound cinematography is now possible in Super-8. There is no basic cinematographic reason for rejecting Super-8, except that of image quality. So the answer to the "effectiveness" side of Super-8 cost-effectiveness lies primarily in the size of the presentation screen. Where the presentation medium is television, including videotape and the upcoming videodisc, a rear-projection portable Super-8 projector, or a classroom screen, Super-8 is more than adequate, as can be seen by looking at the quality achievable in one-quarter of any 16mm screen image. Technically, a Super-8 print in 1975 has image resolution and grain structure superior to that of a comparable 16mm print made in 1965, when both are projected to the same screen size.

So two elements combine as sufficient conditions to shoot original Super-8: *Cost* — if a substantial fraction of the budget will be spent on equipment and expendables, and *Image Size* — if the size of the intended audience's viewing screen is small enough, then the decision to work in Super-8 is an intelligent professional decision. As more professional producers make that decision, we can look forward to a healthy growth in cinematography for the small screen.

However, despite all the aforementioned

Continued on Page 1297

A DECADE OF PROGRESS HAS CULMINATED IN SUPER-8 SOUND

By **ALLAN L. WILLIAMS**

Manager, Pacific Southern Region; M.P. & Audiovisual Markets Division, Eastman Kodak Company, Hollywood

The first serious talk that I remember hearing about Super-8 film as a professional medium goes back over a decade. Our research division, and many other people were wrestling with the strenuous problems involved in establishing a standardized small-format film medium, primarily because they foresaw the enormous opportunities that it would open for distributing films on a massive scale.

The hurdles that had to be cleared to make this dream come true were high. However, almost everyone in the film industry agreed that the opportunities were too substantial to ignore. That was the first time I heard the premise that the small-film format could do for movie-making what the paperback had done for publishing.

Furthermore, the lid would be taken off new production. Producers could tailor their films to the specific tastes and imaginations of consumers rather than the "mass appeal" sought by theaters and the television networks.

However, much had to be achieved before the dream of Super-8 film as a professional medium could become reality. Some predicted that it would take as long as three to five years for the new medium to take hold. In fact, it took a decade of innovative engineering and hard work.

The introduction of the Super-8 film frame format was the essential key for unlocking the puzzle. The new film frame dimensions upgraded the quality of the projected image from amateur to professional. And standardization is unlocking the door to earning the public's trust. Prior to this, few people were willing to invest in equipment which could become obsolete before they reaped a fair return.

Finally, even with that doubt allayed, there were still some important questions which had to be answered before progress could be made on a broad scale. Should sound be recorded and played back on an optical or a magnetic track? Should the film be fitted into a cartridge for easier handling during projection?

Most of these answers had to be hammered out on the anvil of trial and error. Fortunately, the promise didn't lie dormant awaiting developments in the consumer marketplace. In a world where almost everything that we do appears to be becoming increasingly

more complex and specialized, Super-8 color-sound movies have provided the stuff that an evolution — not a revolution — in communications is made of. Progressive individuals in education, business and industry, government and the medical profession have recognized that the new medium is an effective way to bring their messages to people in a highly effective, standardized and individualized manner.

For example, at the University of Arizona, the agricultural education facility found that they could use Super-8 cameras to document hard-to-learn skills for students to view in groups as well as individually. Also in Arizona, a real estate broker began to use an existing-light movie camera and Kodak Ektachrome 160 movie film (type A) to produce economical movies that increased his sales and earnings. Instead of bringing all of his prospects to every site that he had to offer, he discovered that he could do considerable qualifying, and save a great deal of time by using a portable Kodak Supermatic 60 sound projector to show them films of what was available.

The idea also took hold in Milwaukee, where a producer filmed

interview situations with top insurance salespersons, and then sold Super-8 color prints to hundreds of agencies for use in training. And, in Memphis, a manufacturer of spray-on paints found that Super-8 color-sound films were an excellent vehicle for making point-of-purchase demonstrations of how to use his products.

Then, there is the case of the manufacturer of dental furniture and equipment who produced demonstration films, and provided his sales force with release prints and portable Supermatic 60 sound projectors for making presentations in prospects' offices. Instead of just talking, they were demonstrating, and the result was that sales spurted upward.

In Georgia, a prison official charged with the responsibility for rehabilitating and training inmates to live and work on the outside, uses a Super-8 camera and a Supermatic 70 projector for producing a library of realistic instructional materials. And, in California, a fast-growing restaurant chain uses Supermatic 60 sound projectors to teach job skills to employees.

The key to the success of the new medium as a communications device is

The Kodak Supermatic 200 sound camera is an existing light, single-system sound Super-8 camera that runs at 18 and 24 frames per second with 18 frame separation, designed for use in television, education, business, industry and government. Camera features include acceptance of 50-foot and 200-foot silent and sound Super-8 cartridges, manual and automatic exposure control, zoom lens, and automatic gain control for sound recording.



the flexibility it permits in presenting information. No darkened rooms are needed, cumbersome film projectors and videotape playback units don't have to be hauled around and threading is only a memory. Consider the Supermatic 60 projector as an example. It is lightweight so a salesperson can carry it on trips, but also sturdy enough to withstand the rigors of travel. The cartridge-loading projector can be used to project an image on either a wall screen for big audiences or a self-contained high-gain screen for viewing by an individual or small group.

Furthermore, it is ideal for self-paced instruction and individualized presentations. A one-lever control permits the operator to advance forward, freeze on any frame or instantly replay any segment of a film.

Now, for added flexibility, there is the Kodak Supermatic film videoplayer VP-1. This unit is similar in size and appearance to the film projector and it uses the same cartridge.

However, that's where the similarities end. The film videoplayer is used to feed Super-8 film images to a single television set or to an entire TV network. With this unit, companies using both individual film projectors and closed-circuit television for training can produce and distribute everything in one medium.

With these fast-breaking developments, there have been some crucial questions raised for filmmakers. The most obvious is: What are the best methods for producing Super-8 movies? The answer is highly subjective.

For certain, anyone aiming at the massive consumer marketplace should think about originating on either 35mm or 16mm film stock. Depending upon the type of production, either Eastman color negative II film 5247/7247 or Eastman Ektachrome commercial film 7252 would be good choices. Both of these films are designed with a large number of release prints in mind.

The Kodak Supermatic film videoplayer VP-1 is designed for use in schools, business, industry, and government installations to play color and sound Super-8 movies over a standard color television set or closed-circuit television system. Features of the videoplayer include push-button controls, automatic threading, instant review, stop-motion, cassette loading, automatic rewind of the film into the cassette at the end of the film, and extremely quiet operation.

By way of comparison, all of the Super-8 color films in use today are designed for optimum projection. As a result, some quality is invariably lost when a laboratory uses one of these films for making an internegative. Furthermore, many labs are using 16mm internegatives for Super-8 release printing. This means that the original Super-8 film image is usually further degenerated during the process of making 16mm intermediate blow-ups.

There are other important reasons for originating on a larger format film. Flexibility is primary among these. For example, consider the experience of the Loctite Corporation in Newington, Conn. The company is a major manufacturer and distributor of adhesives and sealants.

In 1964, Bruce Burnham, manager of communications projects for Loctite, produced their first 16mm film on location at a client's plant. Prints of the movie were used by the sales force to give prospects a firsthand view of how to use the product involved. The film was a great success, Burnham relates, because it demonstrated techniques and concepts that were very difficult to get across in words alone. As a result, other films were produced and Loctite continued to reap good results. The only limitation, in fact, was that presentations could be made effectively only where prospects were gathered and appropriate facilities were available for projection.

All of this rapidly changed with the introduction of portable Super-8 sound projectors. After testing the various models of equipment available, Loctite decided to provide each of their sales people with a Supermatic 60 sound projector and a library of all of their 16mm films reduced in size to the Super-8 format.

The flexibility of using both media — 16mm and Super-8 — gives them much more bang for their marketing buck. And while it would be technically feasible for Loctite to originate in the

Super-8 format and do release printing in both 16mm and Super-8 from a blowup intermediate, the quality of both would be compromised, and the resultant savings in production costs would only be minimal.

Loctite, of course, is fortunate in having someone like Burnham. He writes his own scripts, records his own location sound, does his own camera work and produces his own movies. Outside specialists are brought in for recording narrations, editing film and mixing sound, as well as for lab work.

If a company doesn't have an internal film department, it's best to hire an outside filmmaker who is experienced with 16mm production techniques. He or she can often make a powerful contribution to the impact of the film, and that's no small contribution. After all, people don't usually make films to save money. They make them to solve problems.

However, different considerations have to be weighed when only one or a few prints are needed. In these cases, many hundreds of people are already originating Super-8 color-sound film for professional use. We believe that there will soon be thousands, if not tens of thousands of people doing this for a very simple reason. Today, the Super-8 camera is, by far, the easiest to use and the least costly color recording device available.

Super-8 movie cameras are being used for many types of reporting: The insurance agent or investigator who wants to document an accident; a real estate broker producing a sales film; a corporate executive reporting upon progress at a new construction site; a law enforcement officer recording evidence at the scene of a crime are all typical users of the new format.

And persons with safety, training and sales responsibilities coming to realize that there is no substitute for showing things the way that they really are use motion pictures. Many educators in schools, in the military services and in medicine have also come to similar conclusions.

In addition, there has also been a tremendous amount of interest in the Super-8 medium for television. For cable systems and educational broadcasters, as well as for many commercial UHF and other smaller stations, Super-8 sound film provides the first opportunity to produce local news, documentaries and commercials on location in color. It also allows all television stations to reap a tremendous harvest of material from stringers and free-lancers. There are an estimated seven million small-format movie

Continued on Page 1347



THE CASE AGAINST PROFESSIONAL SUPER-8

Looking at thy other side of the Super-8 coin with a critical eye, a professional cinematographer concludes that the narrow-gauge format falls short as a professional medium, when compared with 16mm and 35mm

By ANTON WILSON

Super-8 was introduced about 10 years ago as an amateur format. In the first five years of its infancy, this amateur classification went almost unchallenged. With the seventies and an apparent improvement in related Super-8 equipment, the cry of "professional format" should have been expected. There is no doubt that Super-8 is applicable for certain professional (remunerative) situations. However, the reasons given by Super-8 aficionados for using the small format are usually erroneous, irrational and sometimes ludicrous. By taking a close and objective look at the "Super-8 System" we may get a more realistic appraisal of its professional applicability.

Super-8 equipment is much less expensive than similar larger format equipment. Not true! As a matter of fact, a Super-8 camera will cost *more* than a 16mm or 35mm camera of similar quality! The trap that most Super-8 proponents fall into is illogically comparing *amateur* Super-8 cameras with *professional* 16mm and 35mm cameras.

A professional Super-8 camera must be manufactured with *double* the precision of a 16mm camera to achieve the *same* professional standards. For example, professional registration is usually stated as at least 1/1000 of frame height for *any size format*. For 35mm this relates to about seven-tenths, for 16mm this becomes three-tenths and for Super-8 it is almost one-ten-thousandth of an inch. That is a pretty close tolerance, and very expensive to achieve. Likewise, flange-to-focal-plane distances (lens seating) will also have proportionally closer and more expensive tolerances to achieve the same visual standards of the larger formats. What this boils down to is that a Super-8 camera will cost more than a larger format camera *if you compare them on the basis of the same professional standards*.

This is not just theory. As an example, take the Arriflex 35IIC and the Arriflex 16M cameras. Arriflex designed the 16M camera as a 16mm version of the 35IIC camera. These two cameras are almost identical in terms of design: quick-change magazine, three-lens bayonet turret, mirror-shutter, etc. Yet the Arriflex engineers had

to design the tolerances of the 16M much tighter than those of the 35IIC in order to achieve the same standards of visual precision. As a result, the 16M actually cost 30% *more* than the Arriflex 35IIC. One can draw the similar conclusion that if Arriflex ever came out with a professional Super-8, it would most likely cost about the same as their equivalent 16mm camera.

Conversely, the precision of most currently available Super-8 cameras would be comparable to that of a Fairchild 16mm Gun Camera which can be had for about \$25. There are many 16mm cameras in the \$100. to \$1000. range that will give results, in terms of registration, better than Super-8 cameras of the same price. The point here is that for a given amount of money, a 16mm camera can be procured that will give as good, if not better, registration results than a similarly priced Super-8 camera.

There is another important point to be made about precision. Not only are the closer tolerances of Super-8 equipment more difficult and costly to achieve, but also more difficult to maintain. A Super-8 camera/lens is far more vulnerable to dirt and abuse than a camera of larger format. A given error in alignment, registration or seating will cause a much greater visual distortion with the smaller format. Super-8 equipment will thus have to be handled and maintained with greater care. Likewise, dirt and scratches on the film will visually appear at least three times as large with the smaller format. These facts hardly make Super-8 a format conducive to Q & D (quick and dirty), low budget or knock-about productions. As a matter of fact, if a production has to be shot Q & D, i.e., no A & B rolls, no work print, no editing gloves, etc., it most assuredly should be shot in 16mm. Under these extremely low budget conditions, a Super-8 print would be totally unintelligible. If Super-8 were used, greater care in terms of cleanliness and splicing would have to be used, even to get barely acceptable results.

We've been looking at camera gear. What about lighting and sound? Lighting for Super-8 is obviously going to be the same or *more* expensive than for a similar production in a larger format. To light a given area to a particular


illumination level will require the same amount and type (and cost) of equipment regardless of the format being used. So here the expense is the same for any format. However, there are cases, quite frequently, where the Super-8 production will cost *more* to light than if 16mm or 35mm were employed. This is due to two facts.

Firstly, almost all Super-8 camera/lens combinations are much slower than the average 16mm package. This is due to the fact that almost all Super-8 cameras have zoom lenses coupled with beam-splitter-type viewfinders. The average Super-8 zoom lens does not employ as effective a coating as the better large format lenses and thus loses more light in the lens, not to mention the half-stop or so lost in the beam splitter. A Super-8 camera/lens using the beam-splitter system will lose better than one stop and sometimes as much as two stops in the lens/finder optics. This is why almost no Super-8 manufacturer advertises or even indicates 'T' stops on the lens (the exception being Angenieux) because that nice f/1.8 becomes a T/3.5, and even some of the so-called reflex XL cameras are still in reality around a T/2.8. Therefore, in 16mm, where fixed focal lengths of T/1.4 to T/1.8 and zoom lenses of T/1.9 to T/2.5 are quite common, the standard Super-8 lens will more likely be a T/2.8 to T/3.5, requiring from two to four times more light (and lighting equipment). Of course, there are new Super-8 zoom lenses, notably the Angenieux 6mm-80mm, T/1.4, that are fast and of professional calibre, but they are also professionally priced.

There are other factors that could make the large formats more conducive to low budget films. There are many devices, film stocks, special processes, etc., that can facilitate quick and cheap location production that are not available for the Super-8 format. For example, there are several proprietary processes, such as Chemtone, for the development of ECN II at 250 ASA with virtually no quality loss and 500 ASA with a minimum of loss. In addition, this process reduces contrast, which can minimize the use of fill light both indoors and out. Because these processes are not available for

Continued on Page 1296

The Super8 Sound Catalog

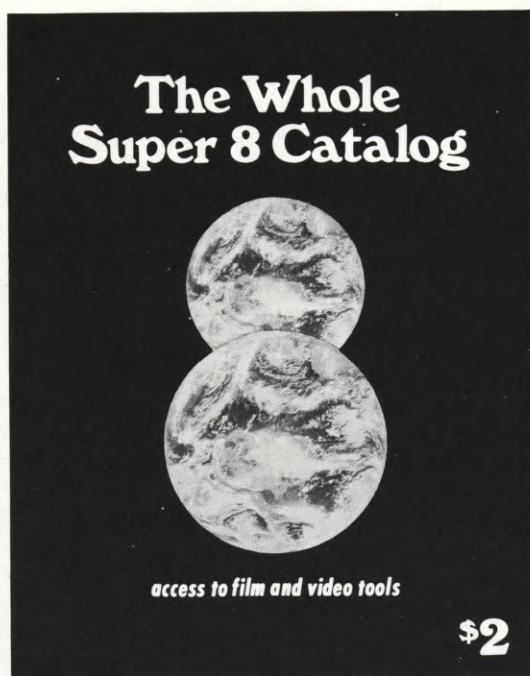

Some of our customers think of it as "The Whole Super 8 Catalog", but it's really called the "Super8 Sound Catalog". Its 72 pages contain the most comprehensive listing available anywhere of Super 8 sync sound and low-cost video production equipment — single-system cameras and double-system cameras, crystal camera controls and camera silencers, sync cassette recorders and sync fullcoat recorders, inexpensive motorized editing benches and elegant horizontal editing tables, sync projectors and interlock projectors, telecine projectors and flying-spot-scan videoplayers,

Super8 Sound Dealers

NY: **SOS Photo-Cine-Optics**
315 W. 43rd St.
New York, NY 10036
(212)-586-1420

Hahn Graphic, Inc.
308 Driving Park Ave.
Rochester, NY 14613
(716)-254-5705

PA: **Oscar Hirt, Inc.**
41 N. 11th St.
Philadelphia, PA 19107
(215)-923-0650

MO: **Audio-Visual Services, Inc.**
709 Westport Rd.
Kansas City, MO 64111
(816) 531-8800

CA: **Adolph Gasser Film Enterprises**
181 Second St.
San Francisco, CA 94105
(415)-495-3852

Skinner Studios
345 Sutter St.
San Francisco, CA 94108
(415)-986-5040

Valley Projection
2227 W. Olive Ave.
Burbank, CA 91505
(213)-842-3576

Camera Mart
625 B St.
San Diego, CA 92101
(714)-235-6564

Australia: **Camera World**
76 Waverley St.
Dianella, Western Australia 6062
76 6695

Benelux: **Adviesbureau voor**
Audio-Visuele Techniek
Vondelstraat 17
The Hague, Netherlands
070 33 39 32

Canada: **Canadian Super 8 Centre**
205 Richmond St. W.
Toronto M5V 1V5
(416)-363-4554

France: **Cinesync S.A.**
2, Rue Lecomte
75017 Paris
(1) 229-58-42

Germany: **Super 8 Vertrieb**
5023 Weiden
Ostlandstrasse 50
Postfach 1362
(0 22 34) 7 25 52

India: **KATONIX**
C-15 Greater Kailash-I
New Delhi-110048

1/2-inch videotape and 3/4-inch videocassette recorders and editing systems, optical printers and continuous printers, laboratory processors and automatic do-it-yourself processors, film stock and fullcoat mag stock, complete film and video production system recommendations, and cables of every description that are needed to connect system components together.

All this plus technical data tables on film stocks, on camera and projector specifications, and over 100 photographs and illustrations.

The Super8 Sound Catalog attempts to make at least a brief comment about every professional Super 8 tool. It tries to be objective, and frankly critical where necessary. We believe the Catalog will prove invaluable to anyone studying the new possibilities in professional Super 8. Send \$2 for your postpaid copy, and, as with any Super8 Sound product, return the Catalog for a full refund if you're not satisfied.

Now that every production and post-production technique of professional cinematography can be accomplished in Super 8 — at a cost averaging one-fifth that of comparable 16mm equipment — Super8 Sound is establishing a national and international dealer network to provide Super 8 filmmakers everywhere with local sales and service of the same high quality they have come to expect from our Cambridge headquarters.

Our current dealers are listed below. Since none of them as yet stocks every Super8 Sound product, please call ahead before visiting, but they all can supply any of the 715 production items listed in the Super8 Sound Catalog.

With all these developments, isn't it time you got into Super 8?

And if you're already using Super 8 as a silent film — Isn't It Time You Got Into Sync?

SUSTAINING
MEMBER
SMPTE

Super 8 Sound, Inc.
95 Harvey Street, Cambridge, Mass. 02140

Now, your location lighting problems are no bigger than this.



Tota-Light.* More than just a new light, it's a new lighting concept. Compact 1000, 750 and 500-watt quartz lighting with an integral system of lightweight, modular mounting and light control components. Providing almost limitless location flexibility.

With Tota-Light, a room is more than just an area to be lit: it becomes part of the lighting system.

A system where three walls can be lit smoothly and evenly from a single light mounted on the fourth wall. Or four walls, ceiling and floor can be covered from a corner.



Snap-together flags and reflectors snap onto flexible arms.




Locks atop doors, open or closed: flags control light precisely.

Bright, soft umbrella locks into light without accessories.




The key to these, and hundreds of other new possibilities, is the first professional quartz light built like a "system" camera. With a gel frame that locks in like a matte box. A reflective umbrella that needs no acces-

sories. And a family of snap-together flags held by flexible arms. Using these and other components, Tota-Light can be stacked, diffused, converted in seconds to a softlight,

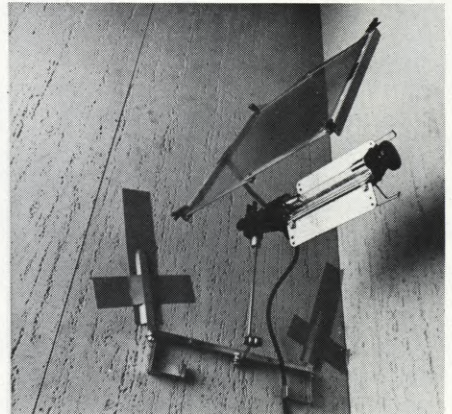

Tota-Light tapes to walls and windows; frame holds pre-cut conversion and diffusion gels.

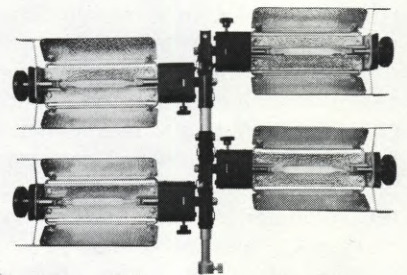

Stacks on stand or clamp.

mounted atop open or closed doors, fastened to virtually any surface...and closed compactly to fit a kit or canvas pouch that loops over the belt.

To find out more about how we've cut location lighting problems down to size, see your Lowel dealer or send for our brochure.

*TM Pat. Pend.




lowel

421 West 54th Street, New York 10019 (212) 245-6744

DOUBLE-SYSTEM AND SINGLE-SYSTEM SUPER-8 SYNC SOUND CAMERAS

The serious Super-8 film-maker is happily confronted by a veritable smorgasbord of highly sophisticated cameras for sync sound shooting

By JULIE MAMOLEN

Choosing a Super-8 camera from among the many fine double-system sound, single-system sound, and Double Super-8 cameras on the market is a difficult task. The Super-8 cinematographer is faced by an array of features that includes zoom ratios up to 13.3 to 1, lenses as fast as f/1.2 for filming in available light, interchangeable lens mounts, running speeds from time-lapse intervalometry to 80 frames per second, crystal camera controls, through-the-lens automatic exposure control with manual override and manual offset by one or two stops from the automatic setting, single-lens reflex viewing, macrocinematography down to the lens front element, and in-camera fades, dissolves, and superimpositions.

Double Super-8 cameras use 16mm-width film perforated Super-8 (1-4) and permit up to twenty-minute continuous-run loads, full backwind, professional emulsions such as 7252 (ECO), superior image registration, and stock processing economy.

Single-system cameras offer in-camera recording on a magnetic edge stripe, some with high-fidelity sound recording specifications, and you can transfer later to full-coat magnetic film for serious editing. New 200-foot sound cartridges allow up to ten-minute continuous-run filming, and some single-system cameras also have double-system sync connections.

Double-System Super-8 Cameras

What makes a Super-8 camera a

double-system sync sound camera? All that's required is a sync signal (some means of carrying information about the frame rate of the camera — exact speed in fps — to a sync sound tape recorder). This sync signal may be recorded by a tape recorder on a special sync track alongside the audio track. Alternatively the sync signal may be used to speed-control Super-8 fullcoat magnetic film if a Super-8 Sound Recorder is used. Electronic servo-control of the recorder's speed insures that for each frame of picture film exposed in the camera exactly one sprocket hole of magnetic film passes the magnetic head of the Super-8 Sound Recorder.

The sync signal from the camera can be as simple as a switch that opens and closes once for each frame of film exposed. This 1/F (once-per-frame) sync signal is available on over 40 Super-8 cameras, where it has generally been included by the manufacturer as an electronic flash (PC) contact. Several cameras generate a 1/F tone burst, and have a special sync corrector.


The traditional sync signal used in 16mm and 35mm filmmaking is a 60Hz pilotone continuous wave, and this sync signal is used on some Super-8 cameras, Beaulieu, Cinema Pathe, and Nizo Professional. The difference between the pilotone and 1/F sync signals is shown in the accompanying figure.

We are summarizing here the major characteristics of the Super-8 cameras that are most widely used for double-system sync sound work.

Important accessories, such as crystal camera controls and silencers, are available only for some cameras; if you need these devices, choose your camera carefully. Besides the brief description of the more notable cameras, we have collected data on 29 double-system cameras, 14 single-system cameras, and two Double Super-8 cameras into convenient comparison tables. Unless otherwise specified, all Super-8 cameras described in this article have the following features:

- Use Super-8 film in 50' cartridges
- Automatically keyed to film's ASA speed from ASA 25 to 160
- Integral type-A (Wratten 85) filter manually keyed
- Footage counter
- End-of-film indicator in viewfinder
- Zoom lens with battery-powered zoom, and manual override
- Reflex groundglass viewing with beamsplitter in front of diaphragm
- Focusing down to approximately 3-4 feet (some have macro capability)
- Automatic exposure control (CdS cell) through the lens with exposure value displayed in viewfinder and manual override
- Powered by AA (penlight) batteries
- Screw-in filter mount (size specified)
- 24 fps speed as well as amateur 18 fps

(LEFT) The new Beaulieu 5008S is probably the highest quality Super-8 sound camera of any kind, single- or double-system, with sound recording specifications superior to those of most cassette recorders (Hercic Corporation). (RIGHT) The Canon 814E Sync Sound camera is compact and ruggedly built. Bell & Howell first modified this camera's very simple predecessor, the Canon 814, for its Filmosound-8 (double-system with cassette recorder) combination.

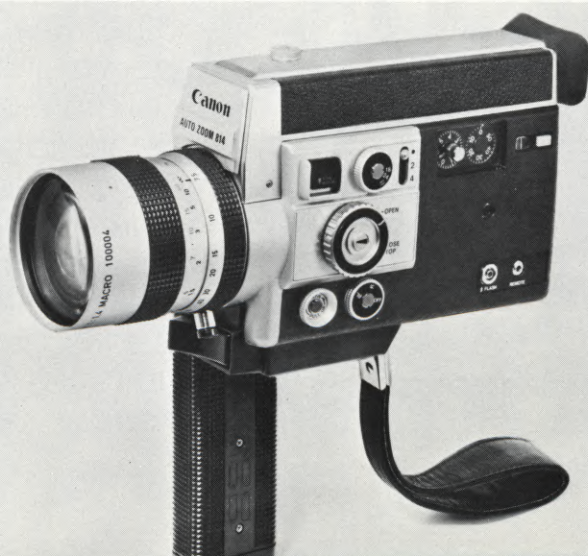



BAUER C ROYAL 8E CAMERA

(LEFT) The Braun line of Super-8 cameras, which can be used for sync sound filming, has many sophisticated features and capabilities. Nizo also manufactures the Nizo 800 Professional, which features built-in 60Hz pilotone and slating devices. (CENTER) The Bauer C Royal 8E sync sound camera. (RIGHT) The Nikon R8 sync sound camera. This camera features the excellent CineNikkor lens and very complex controls allowing for a wide range of effects.

- Single frame with separate cable release socket
- Sound sync jack with one contact per frame (1/F)

Beaulieu 4008ZM2 and 4008M3 Sync Cameras

Two-thirds of all the Super-8 cameras in use as double-system sync sound cameras are made by Beaulieu or Nizo. The Beaulieu 4008ZM2 is the single most popular camera among Super-8 Sound customers, and also the most expensive. The Beaulieu's popularity is due to its Schneider 6-66mm lens (the widest angle lens of any Super-8 camera), its C-mount lens interchangeability, variable speeds from 2 to 70 fps, and manual ASA setting, together with the availability of a crystal camera control and silencer. The mirror shutter gains nearly half an f/stop over cameras with a beam splitter, and provides a 2-stop brighter viewing image. The 4008M3 is a less expensive version of the 4008ZM2, with the electric zoom replaced by a smooth manual zoom. See the camera data table for more details.

The Beaulieu has some negative features. It is relatively noisy and somewhat fragile. It has no internal 1/F switch, and requires the addition of the modified Erlson sync contact switch to provide 1/F sync signals. Note that the single-system Beaulieu 5008S described below is also a double-system camera.

Nizo Sync Cameras

The Nizo cameras are probably the most reliable double-system Super-8 cameras; they are also the quietest. They withstand heavy student use (and abuse) with a minimum of repairs. The old Nizo S56 was chosen by MIT to be the crystal sync camera in the Leacock system. The S56 was redesigned by Braun as the

Nizo S560 to include lap dissolves and a 1/F sync pulse tone burst. Its current version, the Nizo 561, has an improved viewfinder that makes the f/stop scale easily visible. The 481 and 801 cameras are similar to the 561 except for the lens capability. See the double-system data table for details.

The Nizo cameras have always had two sync contacts — 1/F tone burst system, and the PC contact 1/F switch. Now the Nizo Professional 800P has a third sync capability — the standard 60 Hz pilotone signal (50Hz in European cameras). The Nizo Professional also has a macro version of the 7-80mm Schneider lens used on the 801, and a built-in slating lamp that fogs a frame and sends a clapper voltage for use with recorders having a bloop (beep) oscillator.

All the Nizo sync cameras except the S56 and S80 can be modified by Braun North America (55 Cambridge Parkway, Cambridge, MA. 02142) to accept the Super-8 Sound Crystal Camera Control.

Nizo also offers a number of "XL" cameras with a 225 shutter. The lens aperture speed has not been increased to f/1.2, as with most cameras carrying the XL designation. These cameras have a PC contact for sync sound filming, and are the smallest sync sound cameras available.

Canon Sync Cameras

Canon cameras are very ruggedly built. Their f/1.4 lenses were the fastest Super-8 lenses until the new XL f/1.2 lenses. The Canon cameras are next most popular after Nizo and Beaulieu as sync sound cameras. They have been used for sync sound since Bell & Howell first modified the Canon 814 for their Filmosound 8 system in 1970. The Canon's low prices are perhaps the lowest-cost high-quality Super-8 cameras.

Nikon Sync Cameras

The strong points of the recently introduced Nikon Super-8 cameras are the excellent lens quality of the CineNikkor, and the very complex controls which allow virtually every effect, and which are extremely well thought out. For example, when the exposure control is switched from auto to manual it does not reset to the maximum f/stop; it stays on the f/stop that had been automatically set.

The Nikon PC sync socket is an unusual locking type that provides a secure sync sound connection, and the camera itself is very ruggedly built.

Bauer Sync Cameras

Bauer was the first manufacturer to include lap dissolve in its cameras and to incorporate automatic exposure control down to one frame per minute. Bauer sync sound cameras are equipped with the same miniature DIN 8-pin sync socket used by Nizo. The cable is different, however, because Bauer provides a 1/F switch, and not a tone burst like the Nizo.

Bolex Sync Cameras

Although Bolex is one of the great

The Bolex 580 sound camera. Bolex now includes 1/F sync contacts on its two best Super-8 cameras, the 450 and the 480 Macrozoom.



Single-System Camera Data Table

CAMERA	Head Phone Monitor	200'	Speeds	ASA	Zoom Range (mm)	f/Stop	Min Focus	Filter	Batt.	Double-System Sync
Beaulieu 5008S	YES	NO	24,18	25-400	6-80	f/1.2	2'	72mm	NiCad	YES
Bell & Howell Filmosonic 1230	NO	NO	18	25-160	8.5-24*	f/1.3		none	6AA	NO
Bolex 550XL	YES	NO	18	25-160	8-40	f/1.2	5'		6AA+9V	NO
Bolex 580	YES	NO	18	25-160	7.5-60	f/1.7	5'			NO
Eumig 30XL	YES	NO	18	25-160	8.5-24	f/1.3	4'	none	6AA	NO
GAF SS805	YES	NO	18*	25-160	7.5-60	f/1.7	5'	58mm	6AA	NO
GAF SS605	YES	NO	18*	25-160	8-48	f/1.7	5'	58mm	6AA	NO
GAF SS250XL	YES	NO	18*	25-160	9-22.5	f/1.1	6'	none	6AA	NO
Kodak Ektasound T30	NO	NO	18	25-160	9	f/1.2	6'	none	6AA+9V	NO
Kodak Ektasound 140	NO	NO	18	25-160	9-21*	f/1.2	6'	none	6AA+9V	NO
Kodak Ektasound 150	NO	NO	18	25-160	9-21	f/1.2	6'	none	6AA+9V	NO
Kodak Ektasound 160	NO	NO	18	25-160	9-21	f/1.2	6'	none	6AA+9V	NO
Kodak Supermatic 200	YES	YES	24,18	25-160	9-21	f/1.2	6'	none	6AA+9V	NO
Sankyo XL40S	YES	YES	24,18	25-160	8.5-34	f/1.2	macro	55mm	6AA	NO

Double Super 8 Cameras

CAMERA	Battery	Sync Socket	ASA	Zoom	f/Stop	Min Focus	Filter	Weight	Noise Level	Options
Cinema Pathe DS8	Special NiCad	Special 4-pin (1/F switch + pilotone)	12-400	6-80	f/1.2 (T/1.4)	2'	72mm	3.4kg	NA	400' loads Barney
Canon DS8	8AA	none	10-320	8-64	f/1.4 (T/2)	4'	58mm	3.4kg	60dB	-

names in 16mm, Bolex Super-8 cameras show little sign of benefitting from the technical expertise that produced the Bolex H-16 camera, the Bolex 16 Pro, and the new crystal-controlled Bolex EL. Bolex was first to introduce a macro lens on a Super-8 camera. They now include 1/F sync contacts on their two best Super-8 cameras, and 450 and the 480 Macrozoom.

The Cinema Pathe Electronic DS8 double-Super-8 sound camera is a conversion of the Pathe 16mm model and mounts a 6mm-80mm Angenieux zoom lens in place of the latter's three-lens turret.



Other Sync Cameras

There are a number of other Super-8 cameras that can be used as double-system sync cameras with the Super8 Sound Recorder and various sync cassette recorders such as the Scipio, the Philips 2209, and the new Uher CR134. They are listed in the accompanying data table.

Sync Camera Conversions

Owners of Super-8 or 16mm cameras without a once-per-frame contact switch can have an inexpensive conversion made by many fine camera repair services. We recommend the work of Mr. Willi (Vilmos) Keresztes at Marty Forscher's Professional Camera Repair Service, 37 W. 47th Street, New York, NY 10036. Professional Camera Repair also does 24 fps modifications of GAF sound cameras, and projector modifications to include the once-per-frame sync switch. On the west coast, we recommend the work of Bill Allen at Cinema Sync Systems, P.O. Box 61, Ontario, California, who does in-warranty conversions of any Beaulieu camera with Hervic Corporation approval.

Double Super-8 Cameras

Double Super-8 is 16mm film with

Super-8 sprocket holes along both edges (perforated 1-4). It is used exactly as was old regular 8mm, which was 16mm film with twice the usual number of 16mm sprocket holes. DS8 film is run through the camera once, turned over, and run through again to expose the other side. Film is loaded on daylight spools, 100 ft. or 400 ft. in length. Many 16mm films are available in the DS format (e.g. Ektachrome Commercial and EF 7242). Since the DS8 cameras have built-in metal pressure plates, image registration and stability are superior to any Super-8 cartridge camera.

Only two manufacturers have regular production Double Super-8 (DS8) cameras — Cinema Pathe and Canon. Since the DS8 format has so many advantages to offer to the professional Super-8 filmmaker, we expect that other 16mm manufacturers may soon offer DS8 versions of their equipment. Eclair and Arriflex both have built special DS8 versions of their cameras, and have given them limited publicity at *Photokina*. Bolex has a strong position in the 16mm and Super-8 market, and might be expected to offer a DS8 version of their H-16 or new EL cameras. Beaulieu could offer a DS8 version of their R16B. If the strong interest in Super-8 TV News continues, Cinema Products might be tempted to build a DS8, perhaps based on their planned relatively inexpensive SMO camera.

Cinema Pathe Electronic DS8

The Pathe DS8 is a conversion of the Pathe 16mm Electronic camera. Into the rotating 3-lens turret has been mounted the new 6-80mm f/1.2 Angenieux lens. The 6-66mm f/1.8 Schneider-Optivaron lens is available as an option. The variable speed (8 to 80 fps) includes the highest speed of any Super-8 camera. The Pathe DS8 is a fully-equipped sync sound camera, with built-in 60Hz pilotone and 1/F sync switch. It is thus compatible with all sync recorders, cassette or reel-to-reel. The Pathe DS8 can be fitted with a 400-ft. magazine with an integral take-up motor. This permits a continuous shot of 20 minutes, one of the longest available runs in any film gauge. A custom sound barney is available from Karl Heitz, the importer, making the camera very quiet in operation.

Canon DS8

Although closely related structurally to the Canon Scoopic 16mm, the Canon DS8 is actually a

completely reworked camera. The permanently-mounted zoom lens is the same 8-to-1, f/1.4 lens as is on the Canon 814E. The Canon DS8 is not built as a sync sound camera; it must be modified (e.g. by Professional Camera Repair of New York) to include a 1/F sync switch.

It is very noisy, and some kind of barney is an essential accessory. The electric eye is not through-the-lens. Other technical details are listed in the table.

Bolex DS8

Owners of the Bolex H8 Rex camera should consider a conversion to the Double Super-8 format. This under-\$200 modification is performed by J-K Camera Engineering, Dept. S8S, 5101 San Leandro St., Oakland, CA 94601.

Single-System Super-8

A single-system camera is a complete sync sound location outfit, combining a sync camera and a sync recorder in one housing. Sound is recorded in sync on the magnetic edge stripe at a standard position 18 frames from the picture gate. Shot after shot is in perfect sync; slating is only needed for transfers to double-system. For one-person film crews, single-system is the ultimate in convenience and simplicity. All the controls are in one place; all decisions, sound and picture, can be made by one person. For these reasons, it is clear that single-system sound cameras will eventually dominate the home movie market. This is probably also the best way to introduce a beginner to sync sound filmmaking, since it postpones learning how to sync up the rushes until the novice has a creative reason for wanting separate sound and picture.

The Super8 Sound Recorder can be used to transfer sound from the magnetic edge stripe to fullcoat mag film for double-system editing. This gives the filmmaker the best of both worlds — single-system production and double-system post-production.

The first single-system cameras built (Kodak Ektasound) are very primitive designs — 18fps only, rangefinder viewing, automatic gain control and exposure control, noisy, and with a sound hiatus between shots.

The second manufacturer to enter the field, Beaulieu, built a camera (the 5008S) that is probably the highest quality Super-8 camera of any kind, single- or double-system, with sound recording specifications superior to

Continued on Page 1322

Double-System Camera Data Table

CAMERA	Batt.	Sync Cable	ASA Range	Zoom Range (mm)	f/Stop	Min. Focus	Filter Thread	Weight	Noise Level	S8S XTAL	S8S Silencer	Other Features
Bauer C Royal 8E	6AA	CC8	25-160	7.5-60	f/1.8	Macro	49mm	1.1kg	NA	NO	KIT	1,2,3,4
Bauer C Royal 10E	6AA	CC8	25-160	7-70	f/1.8	Macro	55mm	1.1kg	NA	NO	KIT	1,2,3,4
Beaulieu 4008ZM2	7.2V	Erlson, Pilotone	10-400	6-66	f/1.8	Macro	61mm	1.5kg	55dB	YES	YES	1*,2,3,5
Beaulieu 4008M3	7.2V NiCad	Erlson, Pilotone	10-400	6-66	f/1.8	4'	61mm	1.5kg	55dB	YES	YES	1*,2,3,5
Bolex 450	5AA	PC	25-160	8-40	f/1.8	4'	55mm	1.4kg	55dB	NO	KIT	—
Bolex 480	5AA	PC	25-160	7-56	f/1.8	4'	55mm	1.5kg	55dB	NO	KIT	—
Canon 814E	4AA	PC	16-400	7-56	f/1.4	Macro	58mm	1.55kg	54dB	NO	KIT	1,2
Canon 1014E	6AA	PC	16-400	7-70	f/1.4	Macro	58mm	2.0kg	54dB	NO	KIT	1,2
Elmo Super 110R	4AA	Special	25-160	7-70	f/1.8	3'	62mm	1.4kg	51dB	NO	KIT	3*
Fujica Z800	4AA	Special	25-400	8-64	f/1.8	Macro	62mm	1.4kg	NA	NO	KIT	1,2,3
GAF ST802	4AA	PC	16-250	7.5-60	f/1.7	5'	58mm	1.7kg	NA	NO	KIT	—
GAF ST1002	4AA	PC	25-640	6.5-65	f/1.7	5'	77mm	1.9kg	NA	NO	KIT	—
Leica Special	6AA	CC9	10-1000	Interchangeable	Leica-Mount Lenses				55dB	Jensen	KIT	3,4*
Minolta Autopak8 D-12	5AA	CC9	10-400	6.5-78	f/1.8	Macro	67mm	2kg	55dB	NO	KIT	1,2,3,4*
Nikon R8	6AA	Locking PC	10-400	7.5-60	f/1.8	Macro	52mm	1.6kg	NA	NO	KIT	1,2,3
Nikon R10	6AA	Locking PC	10-400	7-70	f/1.4	Macro	67mm	1.9kg	NA	NO	KIT	1,2,3
Nizo 136XL	4AA	PC	10-160	9-36	f/1.8	3'	49mm	.8kg	NA	YES	KIT	4
Nizo 148XL	4AA	PC	10-160	6-48	f/1.8	3'	49mm	.85kg	NA	YES	KIT	4
Nizo 156XL	4AA	PC	10-160	7-56	f/1.8	3'	49mm	.85kg	NA	YES	KIT	4
Nizo 481, S480	6AA	PC,CC8	10-160	8-48	f/1.8	3'	49mm	1.35kg	52dB	YES	YES	1,2,3,4
Nizo 561, S560	6AA	PC,CC8	10-160	7-56	f/1.8	3'	49mm	1.35kg	52dB	YES	YES	1,2,3,4
Nizo 801	6AA	PC,CC8	10-160	7-80	f/1.8	4'	62mm	1.6kg	52dB	YES	YES	1,2,3,4
Nizo 800P	6AA	PC,CC8, Tuchel	10-160	7-80	f/1.8	Macro	62mm	1.6kg	52dB	YES	YES	1,2,3,4
Rollei SL84	3AA	PC	25-160	7-70	f/1.8	5'	55mm	1.1kg	NA	ISS	KIT	1,3,4*
Sankey CME444	4AA	PC	25-400	8.5-35	f/1.8	4'	49mm	1.3kg	NA	NO	KIT	—
Sankey CME666	4AA	PC	25-400	8-48	f/1.8	4'	49mm	1.3kg	NA	NO	KIT	—
Sankey CME1100	4AA	PC	25-400	6.5-65	f/1.8	Macro	55mm	1.6kg	NA	NO	KIT	—

1. Lap Dissolve (* if with accessory) 2. Variable Shutter 3. Tape Recorder Start/Stop 4. Intervalometer (* if with accessory) 5. Mirror Shutter

The Beaulieu 4008ZM2 camera, shown here synced with the Super8 Sound Recorder, is the single most popular camera among Super-8 sound customers — and the most expensive. The Beaulieu's popularity is due to its Schneider 6mm-66mm lens (the widest-angle lens of any Super-8 camera), its C-mount lens interchangeability, various speeds from 2 to 70 fps, its manual ASA setting, together with the availability of a crystal camera control and silencer.



U.S. Patent #3,204,031 to be exact. It's our revolutionary "two-way" cardioid dynamic microphone. Only we have it. And it's available especially for the cinematographer as the AKG D-202E.

Before our "two-way" development, whenever one end of the frequency range was expanded the other end lost. And there was often trouble in-between.

The solution our people came up with was so simple it was beautiful. Build two microphone elements in the same housing. One for highs. One for lows. Phase them together with an integral crossover network and you've expanded your range without any strain—anywhere. Sound familiar? It's the same principle behind a modern speaker system—only backwards.

On the sound stage or out on location, you have the

range you need. Plus a completely flat response over the entire audio spectrum and natural reproduction up to 90° of the microphone axis. Plus no "booming" proximity effect and virtually no feedback problem.

There are other AKG "two-way" mikes, plus boom mounts, stands and adaptors. And a full line of other AKG mikes including dynamic and condenser shotguns. And an entire range of accessories. AKG mikes make every word uttered on your set easily sound even truer to life.


Speak to your professional equipment supplier. Or write for details.

AKG MICROPHONES • HEADPHONES
PHILIPS AUDIO VIDEO SYSTEMS CORP.
AUDIO DIVISION
91 McKee Drive, Mahwah, N.J. 07430
A North American Philips Company



**We patented a way to make your
cinema sound a little more verité.**



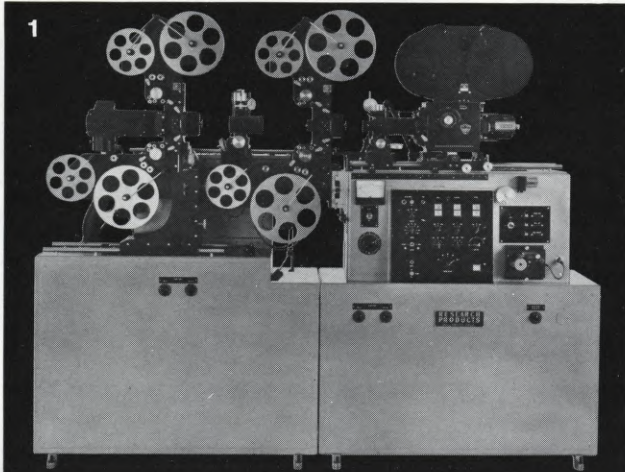


AERIAL IMAGE OPTICAL PRINTER, Model 2101

NEW! RPI proven Camera Zoom available also for aerial image!

- Proven 5 years, electronic "PhotoTron" drive*
- Log/linear dissolve and fade.
- The printer favored by Hollywood's major studios for special effects.


Academy Award 1974

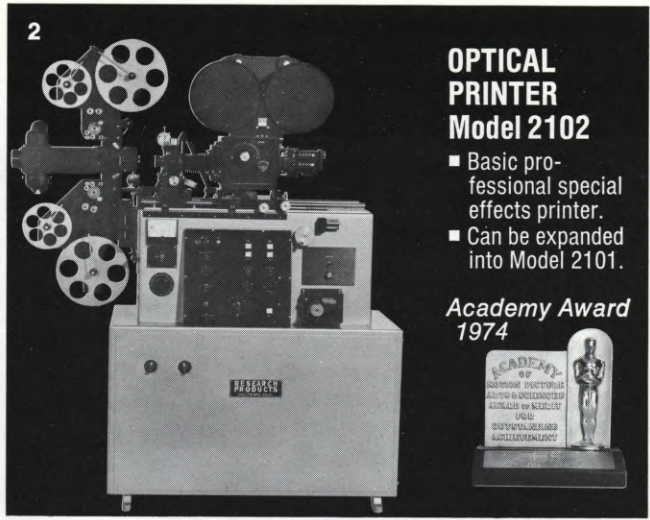

OPTICAL PRINTER Model 2102

- Basic professional special effects printer.
- Can be expanded into Model 2101.

Academy Award 1974

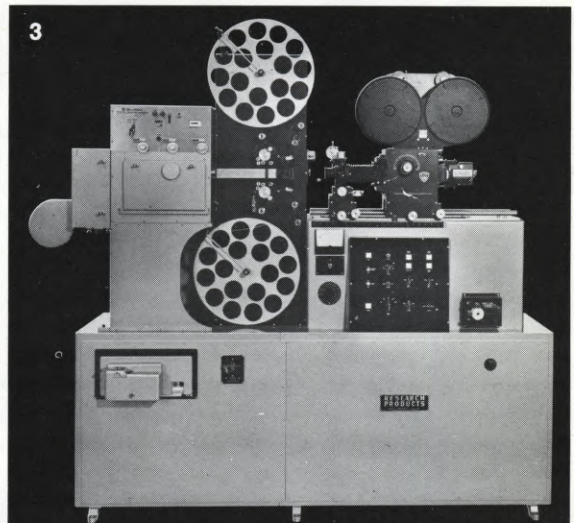

OPTICAL PRINTER, Model 2103C

NEW! "Solid State Liquid Gate"—the light source* that removes film scratches!

- B&H additive lamp house.
- Basic laboratory printer for film format conversion.

Academy Award Winner 1971

the foremost family of four... is now six!

The four illustrated, plus—

5 . . . a **NEW** low cost 16mm animation/optical printer for laboratories, TV stations, in-plant producers and universities. It features RPI camera and projector heads with registration movements, a scratch removal light source, and art work aerial image board.

6 . . . a **NEW** electronic 35mm table top viewing projector featuring variable speed, slew, and quiet operation.


For complete information—write, telephone or cable Research Products, Inc., 6860 Lexington Ave., Hollywood, CA 90038, USA; Telephone: 213-461-3733; Cable: RESEARCH. **New York and Eastern Seaboard Sales-Service**—Edward Willette, president, Photographic Equipment Service, Inc., 695 Main St., New Rochelle, NY 10801; Telephone: 914-235-2720.



RESEARCH PRODUCTS

Research Products are Products of the Future

In world-wide use . . . Sweden, Italy, Japan, Hong Kong, China, Turkey, India, Canada, Mexico, Brazil and U.S.A.

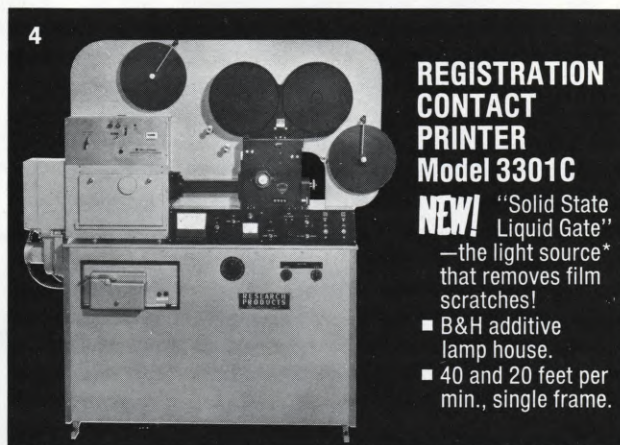

REGISTRATION CONTACT PRINTER Model 3301C

NEW! "Solid State Liquid Gate"—the light source* that removes film scratches!

- B&H additive lamp house.
- 40 and 20 feet per min., single frame.

*U.S. Patent No. 3,367,299. Other Patents Pending.

SUPER-8 SYNC SOUND RECORDERS

A surprisingly large number of cassette and reel-to-reel recorders are now available, or can easily be adapted, for Super-8 sync sound shooting

By ROBERT O. DOYLE

There are a surprisingly large number of sync sound recorders available for use in Super-8 production.

First, any professional quarter-inch pilotone recorder can be used with the various Super-8 pilotone cameras, or with crystal-controlled Super-8 cameras if a crystal sync generator is added to the recorder.

Second, several hi-fi stereo recorders, reel-to-reel or cassette, record an audio track, plus either a pilotone sync track or the new one-pulse-per-frame (1/F) sync signal used in many Super-8 cameras.

Third, a number of cassette sync recorders have been specially designed for use in Super-8, most using the 1/F sync signal, and one that utilizes the standard pilotone.

Fourth, any single-system Super-8 camera is a sync recorder, since sound from the magnetic edge stripe is in frame-for-frame sync and may be transferred to Super-8 fullcoat magnetic film for editing.

Fifth, and finally, there is the Super8 Sound Recorder, a Super-8 fullcoat magnetic film recorder that is portable enough to be used as location recorder, laboratory resolver, sound studio dubber, and transfer recorder to and from magnetic edge stripe. These multiple functions and the comprehensive compatibility of the Super8 Sound Recorder have earned U.S. letters patent no. 3,900,251 and led *American Cinematographer* to describe the machine as "the most important addition to the Super-8 scene" in their review, "Professional Super-8 at

Photokina '74".

We summarize here the major operating features of the Super8 Sound Recorder and a number of new cassette sync recorders that are widely used in double-system Super-8 sync productions. We do not discuss sync recorders like Arrivox-Tandberg, Uher, Stellavox, and Nagra because 16mm cinematographers are familiar with these machines, and their operation in Super-8 is the same as 16mm, except that the transfer to mag stock is not normally done in a lab, but by the filmmaker himself, using his own Super-8 sound studio equipment.

The Super8 Sound Recorder is now in use by more than three hundred schools and universities in the United States and abroad, and more than two hundred industrial filmmakers, government filmmakers and independent filmmakers.

On Location

The Super8 Sound Recorder will record in sync on location with over 40 available Super-8 sync sound cameras. No camera modifications are required. The cameras must be equipped with a 1/F contact switch (electronic flash PC socket), a pilotone generator, or be crystal-controlled. The list of sync cameras currently available from Super8 Sound (all of which are also compatible with our sync cassette recorders) is given below.

Crystal controls are available for a number of these cameras from Super8 Sound. Single-system cameras can also be used as location recorders, with transfers to Super-8 magnetic film

made back in the laboratory.


Argus 7310
Bauer C-Royal 8E, 10E
Beaulieu 4008ZM2, 4008M3, 5008S
Bolex 450, 480
Canon 814E, 1014E, DS8
Cinema Pathé DS8
Elmo Super 110R, 612
Fujica Z800
GAF ST/802, ST/1002
Leicina Special
Minolta Autopak-8 D12
Minolta XL400
Nikon R8, R10
Nizo 136XL, 148XL, 156XL, S480, 481, S560, 561, 801, 800P
Sankyo CME444, CME666, CME1100

In the Laboratory

Transferring sync sound to Super-8 magnetic film requires a sync signal that provides frame rate information to the Super8 Sound Recorder. The Recorder servo-controls its speed so that one frame of magnetic film passes the recording head for each "frame" of the sync signal, whether a pilotone or digital 1/F signal. Transfers can be made from professional sync recorders such as Nagra, Stellavox, Arrivox-Tandberg, and Uher Neo-Pilot, and from the new sync cassette recorders such as Philips 2209 AV, Uher CR134, Super8 Sound's Scipio and others.

Transfers can also be made from the magnetic edge stripe of a single-system film by connecting the Super8 Sound Recorder to a projector with a 1/F contact switch. Professional sound labs can use the Super8 Sound Recorder in AC line sync with their other recorder/reproducers.

(LEFT) The Super8 Sound Recorder is the most widely used Super-8 magnetic film recorder. This extremely versatile machine acts as a sync location recorder, a crystal recorder, a laboratory resolver, a mixing unit, and a transfer machine. With the use of this equipment and Super-8 fullcoat magnetic film, Super-8 sync film-making is as straightforward as 16mm practice. (RIGHT) The side panel of the Super8 Sound Recorder, showing the sync socket connector and the panel of switches used to select and monitor the synchronous functions of the recorder.

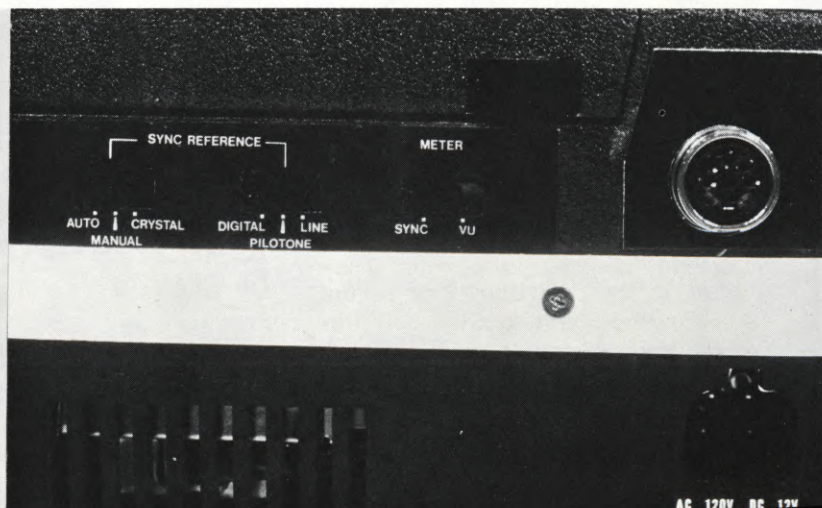



(LEFT) The crystal-controlled Beaulieu 4008ZM2 and the Super8 Sound Recorder make an extremely inexpensive crystal-sync location rig. More than 40 cameras which, like the Beaulieu, provide a sync signal output, may be used for cabled sync location work with this recorder. (CENTER) Very lightweight sync cassette recorders, such as the Super8 Sound Scipio, may be used to record sync sound. The Super8 Sound Recorder then automatically resolves these tracks. It can also transfer sound from pilotone sync recorders like the Nagra and Stellavox. (RIGHT) The Super8 Sound Recorder will synchronize with any projector equipped with a once-per-frame sync switch, for interlock screenings. It is shown here with the Bolex SM8 sync projector.

In the Dubbing Theater

Since the Super8 Sound Recorder will run in perfect interlock with other Super8 Sound Recorders, with the Super8 Sound Sync projectors, and even with the Super8 Sound Double-Band Projector, the possibilities for dubbing and mixing are extensive. Filmmakers can listen to the original sync material, over and over if necessary until perfect, on a second fullcoat mag film recorder.

In the Sound Studio

The Super8 Sound Recorder offers two basic approaches to multiple track sync recording. One is to use multiple fullcoat magnetic film recorders, all running in sync with the AC line frequency. Any number of Super8 Sound Recorders can be interlocked this way, although sync operation is limited to a common start. No sync rollback is possible.

Another method is to transfer edited lip-sync material to one track of a four-channel quarter-inch tape. A pilotone sync signal from the Super8 Sound Recorder is also recorded as a control track. Now the same Super8 Sound Recorder can transfer a second fullcoat strand, with additional sync material, to a third track of the four-channel machine. The Super8 Sound Recorder will maintain sync against the control track. The fourth track can be used for music, narration, etc. All three tracks can then be mixed down to make a composite master fullcoat track, again on the same Super8 Sound Recorder synced to the control track.

In the Screening Room

Sound on fullcoat magnetic film, from the first look at synced-up rushes to the final composite master sound track, can be run in double-system sync with any projector equipped with a 1/F contact switch. Projector and Recorder are started together using either a Common Start Box or the Super8 Sound Photo Start for precisely repeatable starts.

Double-system interlock screenings with a sync rollback capacity can be accomplished on the Super8 Sound DoubleBand Projector. The Super8 Sound Recorder will also synchronize with AC synchronous equipment such as the Kodak TVM100A telecine projector. The Kodak Videoplayer VP-1 and VP-X are supplied by Super8 Sound with a 1/F sync pulse for double-system video transfers.

The Super8 Sound Recorder operates at both professional (24 fps) and amateur (18 fps) film speeds, and has built-in quartz-crystal control for cableless sync work at 24 fps. A sync meter provides positive indication of sync condition.

The Super8 Sound Recorder is a modified Sony TC800B quarter-inch tape recorder. It operates on batteries (12V) or 60Hz/110VAC. Export models operate on 50Hz, 220V or 110V; they synchronize at 24 fps, 25 fps, and 18 fps, and with a built-in 25 fps crystal.

An illustrated, 28-page Super8

Sound Recorder User's Manual is available for \$1.


Super8 Sound Laboratory Recorder

The Super8 Sound Laboratory Recorder is a non-portable studio version of the Super8 Sound Recorder. It records on Super-8 fullcoat magnetic film, using 10½-inch reels (one full hour). It has all the automatic sync functions of the Super8 Sound Recorder except portable crystal sync operation. These include: transferring (resolving) sync sound from any sync recorder — cassette or reel-to-reel, 1/F sync pulse or pilotone; transferring sync sound to a magnetic edge stripe with any sync projector equipped with a 1/F sync switch or AC synchronous motor; transferring sound from the magnetic edge stripe to fullcoat magnetic film; and multiple recorder synchronization via AC line interlock.

The Lab Recorder is a modified Crown PRO-700 three-motor tape

Continued on Page 1318

The Super8 Sound Recorder synchronizes automatically with the selected sync reference by means of its unique electronic speed servo-control capability. Diagram shows the operation of its flip-flop circuit, which ensures that the Recorder's speed matches the reference frame-for-frame.

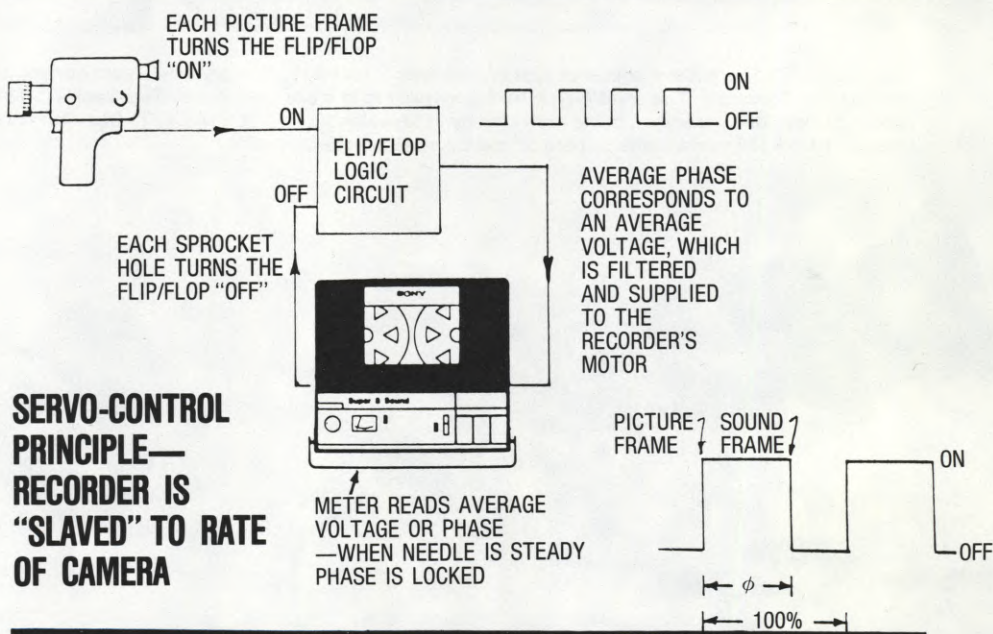

CRYSTAL-SYNC SUPER-8

Crystal-sync cableless operation of the camera-recorder pairs has freed Super-8 from the umbilical cord and made it an incomparably mobile format

By JON ROSENFELD and AL MECKLENBURG

From the beginning of our work with Ricky Leacock to build the original MIT Super-8 system, a key factor in the design was to provide crystal sync cableless operation of the camera-recorder pairs. The extreme portability and easy mobility of Super-8 cameras and cassette tape recorders would be senselessly compromised by an awkward cable between the two.

When we joined Super8 Sound, only the Super8 Sound Recorder was a crystal sync machine. Now we have produced crystal controls that mount on

the camera for all the Beaulieu and Nizo double-system sound cameras, and developed lightweight crystal sync generators for a number of cassette sync recorders that use the Super-8 sync signal of one pulse per frame (1/F).


Our latest design is a conversion of a SONY Dolby cassette recorder known as the XSD Recorder that can be used for sync sound by 16mm or 35mm filmmakers as well as by Super-8 filmmakers, since it uses the industry standard 60Hz pilotone sync signal. The 1/F

sync cassettes are transferred to full-coat magnetic film using the self-resolving capability of the Super8 Sound Recorder. XSD cassettes can be resolved to Super-8 fullcoat the same way, and to 16mm or 35mm magnetic film using an external XSD resolver that matches the speed of an XSD cassette to the 60Hz AC line frequency.


The XSD Recorder is similar to the MIT/Leacock cassette recorder in that it is a converted stereo cassette machine, with one track used to carry the sync signal. Unlike the MIT recorder, it has a separate gain control on the sync channel, and this makes it possible to use the XSD Recorder with pilotone sync cameras, which vary widely in the voltage of their sync output signal.

Crystal Camera Control for Beaulieu cameras.

The crystal control is enclosed in a 1" x 2" x 2" box mounted on a 2" x 4" bracket. The bracket attaches to the tripod screw in the Beaulieu handle. It weighs only six ounces, adding very little to the three pounds of camera weight. One cable connects to the battery-charging socket of the camera, drawing the power necessary to drive the crystal oscillator, and energize the control circuitry. A second cable plugs into the remote control socket to regulate the speed of the camera. The frame rate of the camera is sensed by the modified Erlson screw-in mount contact switch. This 1/F contact switch is supplied by Hervic Corporation with a lock-ring 5 pin DIN plug suitable for cable connection to the Super8 Sound

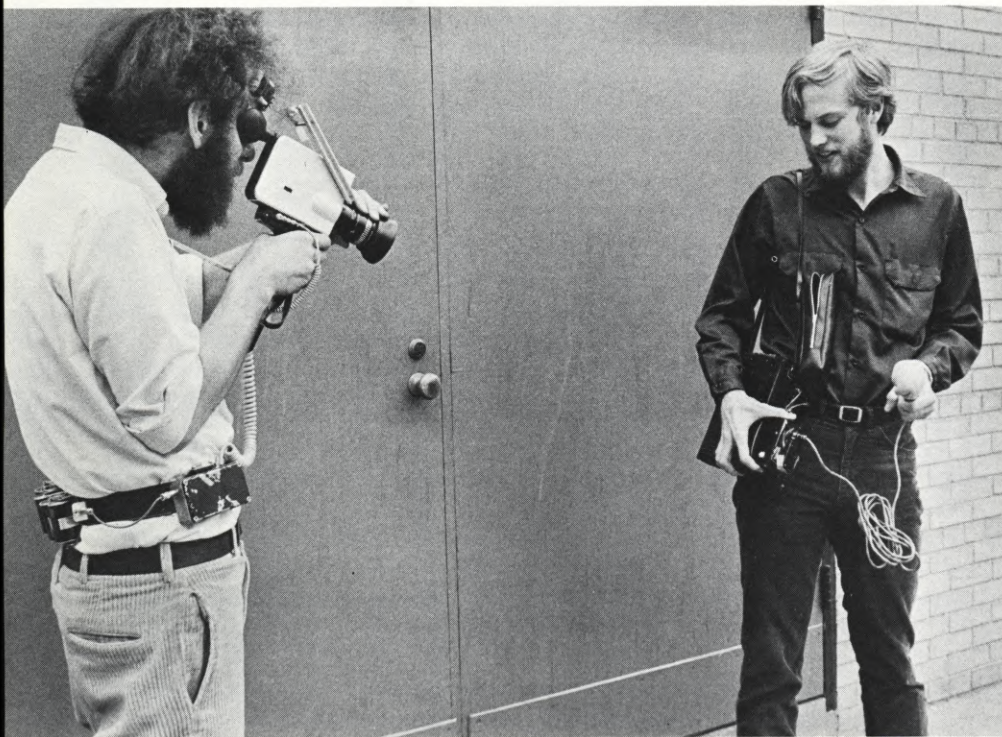

(ABOVE LEFT) The authors with their first crystal-sync Super-8 rig. The crystal camera control is mounted in the box on the improvised battery belt worn by Jon Rosenfeld. The crystal-sync tone generator is in a box on the modified Sony TC 124 cassette recorder. The box also contains a bloop light and beep-tone generator, being activated by Al Mecklenburg. (BELOW LEFT) Beaulieu 4008ZM2 with Super8 Sound Crystal Camera Control. (RIGHT) Nizo S560 camera with Super8 Sound Crystal Camera Control.

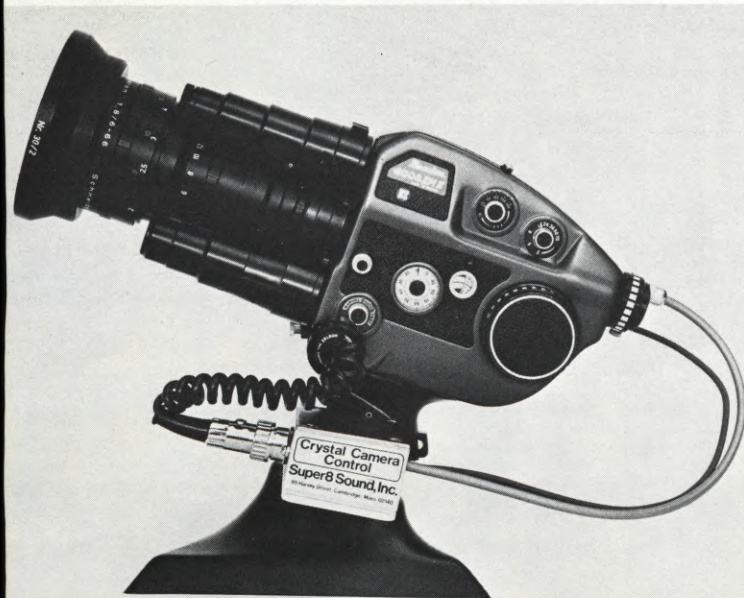

Recorder. This same sync cable connects to a 5 pin DIN jack on the crystal camera control. The Beaulieu cameras require no modification whatever.

When the variable speed of the Beaulieu camera is set above 24fps, the crystal control holds it back to a true 24fps. Any setting below about 33fps is easily controlled, but a setting just above works best. A light-emitting-diode indicates proper sync operation. Accuracy is one frame in thirteen minutes over a temperature range from -10°C (15°F) to 40°C (108°F).

The control should be unplugged when not in use, even though the operating current is only 1 mA, and the Beaulieu batteries can supply this two weeks before discharging.


The Beaulieu control is available in a 25fps version for European use.

Crystal Camera Controls for Nizo cameras.

Braun will supply any new Nizo camera with a remote speed control jack that accepts the Super8 Sound Crystal Camera Control. Cameras without such a speed control capability may be returned to Braun North America, 55 Cambridge Parkway, Cambridge, Mass. 02140, and the control jack will be installed for \$29.95. This jack serves the double function of supplying power to the Crystal Camera Control, and allowing the control to regulate the speed of the camera. The PC electronic flash contact on all Nizo cameras provides the necessary 1/F sync signal to the control unit.

The Super8 Sound Crystal Camera Control for the Nizo cameras is the same size and weight as the Beaulieu control described above. It also has the same speed accuracy, but a significantly higher power draw (35mA). Unlike the Beaulieu, the Nizo crystal control regulates the camera to 24fps whenever the camera is running on its 24fps position, and it is turned off when the camera run switch is off, so it can be left plugged into the camera indefinitely.

Crystal camera controls are also available for cameras other than the Beaulieu and Nizo from other manufacturers, notably from Inner Space Systems of Deerfield, Wisconsin. Inner Space Systems have for many years offered the CineSlave, a synchronizer that can control the speed of many types of film equipment. A Cine-Slave CS-5 with an optional plug-in crystal board can crystal-control any Super-8 camera custom-modified by Inner Space Systems. Recently, Inner Space Systems have offered more economical pocket-sized versions of their basic Cine-Slave control circuit. Their model

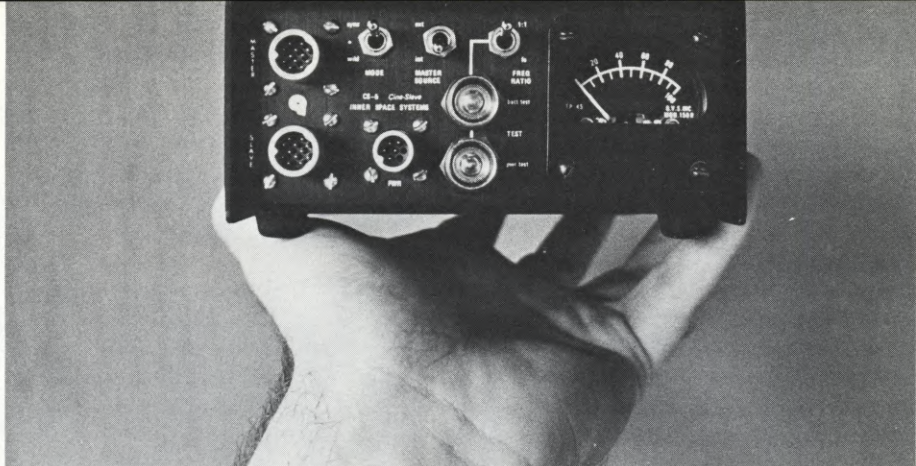

The Cine-Slave Universal Resolver was invented by Inner Space Systems' Technical Director, Bob White, in 1969 and marketed in 1970. In late 1971, ISS became the first firm to crystal-control Super-8 cameras on a full production basis. A Cine-Slave CS-5, with optional plug-in crystal board, can crystal-control any Super-8 camera custom-modified by Inner Space Systems.

PSX is a crystal-controlled Cine-Slave suitable for controlling modified cameras, and their new model PX is a crystal oscillator suitable for recording a 60Hz pilotone sync signal on one track of any two-channel recorder.

Crystal Sync Generator for Cassette Recorders.

For filmmakers who prefer to record with a lightweight cassette recorder in the field, rather than directly onto full-coat mag stock with the crystal sync Super8 Sound Recorder, Super8 Sound has produced lightweight crystal sync (1/F) pulse generators for three cassette recorders — the Scipio, the Philips 2209, and the stereo (plus sync) Uher CR134.

The Crystal Sync Generator XG24 is 1" x 2" x 2" and weighs about five ounces. It mounts directly to the strap of the recorder's carrying case, and derives its operating power from the cas-

sette recorder batteries. Accuracy is one frame in thirteen minutes from — 10°C to 40°C. 25fps versions are available.


XSD (Crystal-Sync-Dolby) Recorder

This latest crystal sync product was designed for use by 16mm and 35mm filmmakers as well as Super-8.

The XSD Recorder is a SONY TC153SD stereo cassette recorder with Dolby Noise Reduction (Trade Mark, Dolby Labs), modified to include a built-in 60Hz pilotone quartz crystal oscillator. It can record sound in sync with any Super-8, 16mm, or 35mm camera that is crystal-controlled or has a standard pilotone sync output. The XSD Recorder uses high-density chromium-dioxide cassettes or standard cassettes. In sync use, it is monophonic with sync on cassette track 1. It reverts to a stereo cassette recorder in

Continued on Page 1320

The Beaulieu 4008ZM2 camera with Super8 Sound Crystal Camera Control and the Uher CR134 Stereo Cassette Recorder with Super8 Sound Crystal Sync Generator. Early on it was realized that crystal-sync was essential to optimizing the extreme portability of Super-8 cameras and tape recorders.

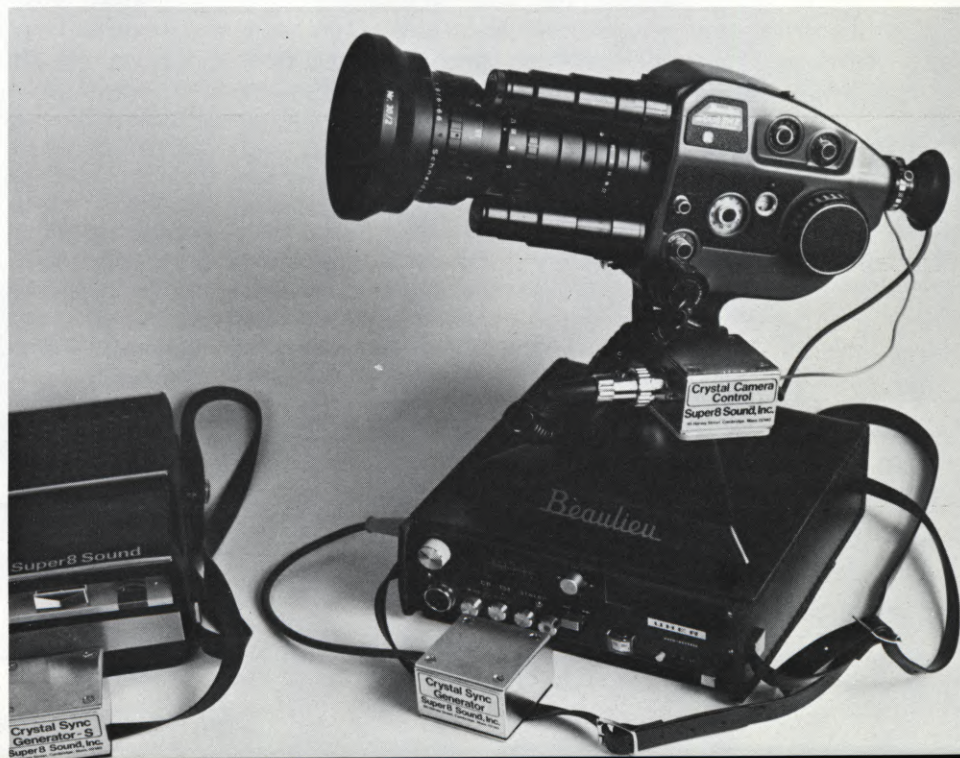



47° Below Zero – And Still Shooting!

The CP-16 is not just a fair weather friend. In fact, this versatile 16mm television news camera has an outstanding performance record in the widest temperature ranges possible. The CP-16 has filmed picture and sound flawlessly in the blistering heat of the desert to sub-zero temperatures as low as 47°F below. And without a heat barney. Today's fast-moving television camera crews just don't have the time to go out on a job with a camera that is not 100% reliable. They can't be concerned with temperature variances and, in winter weather, they must have equipment that will do the job no matter how

cold it is. For that reason, we're suggesting that you investigate the CP-16 today. In just the few short years it has been on the market the CP-16 has become the leading television news single system sound camera in the industry. It's a trouble-free camera that allows you to concentrate on shooting while not having to worry about equipment failure. And, isn't that what television news filming is all about?

Call us today. We have more experience in selling and servicing CP-16 cameras than any other dealer in the world:

THE CAMERA MART, INC.

456 W. 55th Street
New York, N. Y. 10019
(212) 757-6977

VICTOR DUNCAN, INC.

11043 Gratiot, Detroit, Mich. 48213 (313) 371-4920
676 N. St. Clair, Chicago, Ill. 60611 (312) 321-9406
2659 Fondren, Dallas, Texas 75206 (214) 369-1165

ALAN GORDON ENTERPRISES INC.

1430 N. Cahuenga Blvd.
Hollywood, Calif. 90028
(213) 466-3561 / (213) 985-5500

CLEAN answer prints from 7247 A&B Negatives

Take advantage of the excellent quality of 7247 negative without the fear of dirt, scratches, and cinch marks.

Du Art's unique computer system* of negative handling and timing keeps your negative in brand-new condition—

No Notches...No Metallic Tabs...Nothing touches your negative.



The proof is in the spotless condition of the answer print. But don't just take our word for it. Try it! You'll agree, there's nothing in the industry like it. Call Bob Smith for further information.

*Pat. Pending

DU ART
FILM LABORATORIES, INC.



the CLEAN way to 7247 answer prints

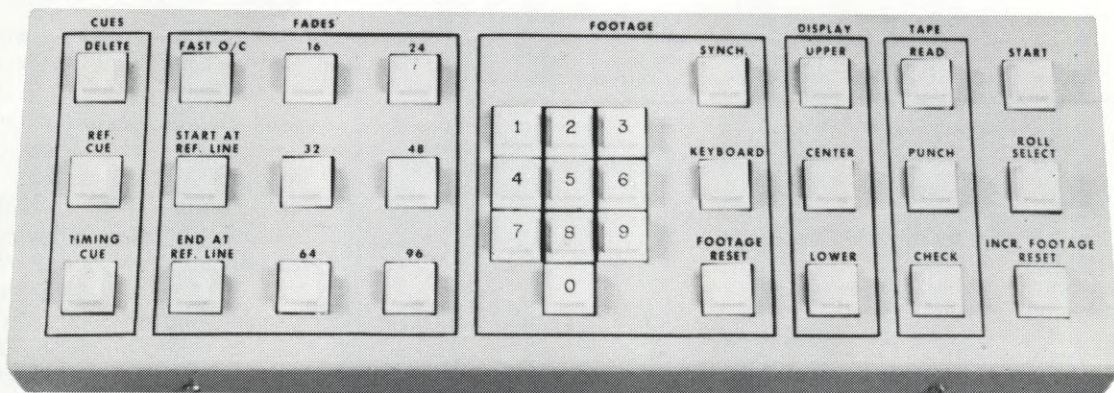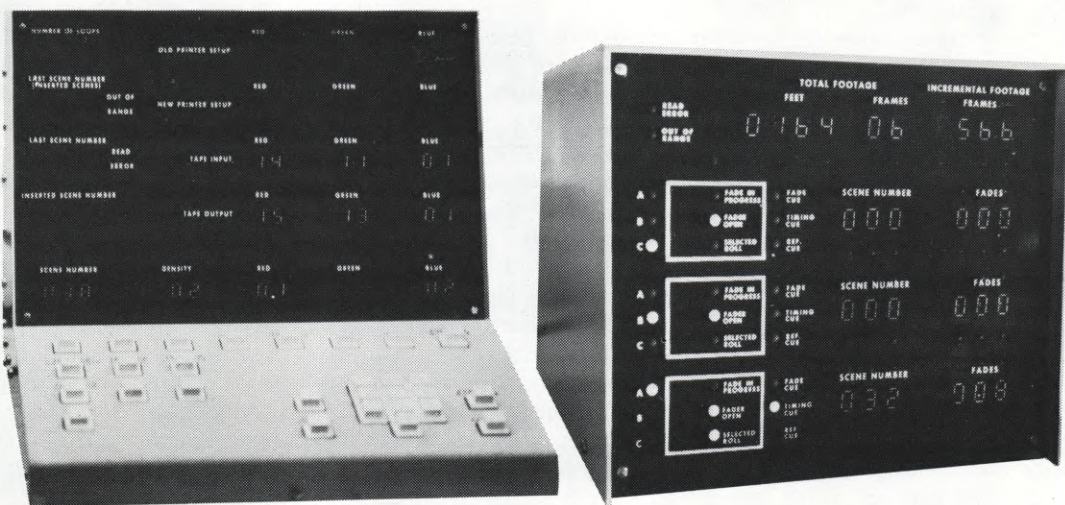

Now in our 53rd year

Du Art Film Building, 245 W. 55th St., New York, N.Y. 10019 (212) PL 7-4580

SUPER-8 LAB SERVICES AND STOCKS

The lack of professional film stocks and laboratory services presents serious problems for Super-8 which, it is hoped, will soon be solved.

By RICHARD LERMAN

Perhaps the most serious drawbacks to Super-8 original production are the lack of professional quality film stocks and professional-level laboratory services for Super-8 original film stocks.

The most widely available Super-8 film stocks — Kodachrome 40 and High-Speed Ektachrome 160 — are projection contrast emulsions intended for use by amateur filmmakers who screen the original camera stock. These stocks cannot be processed by most local laboratories, and their saturated colors duplicate poorly, with color shifts and loss of detail in shadows and highlights. Careful lighting can control the losses somewhat if ratios are kept well below 4:1, preferably 2:1, but there is no controlling the inherent contrast range of much subject material. Low-contrast Ektachrome Commercial (7252) is available in the Double Super-8 format (DS8), but a limited number of Super-8 filmmakers are using DS8 cameras. Ektachrome EF 7242 is available in Super-8 cartridges but it, too, is of projection contrast, has relatively soft images, and a large noticeable grain structure.

When all these options are considered, many labs prefer the high resolution of Kodachrome 40 as the best original stock in the Super-8 cartridge, despite its contrast problem. Most labs report a small volume (less than 5) of prints as the most common Super-8 original order, and these were struck directly from the original in most cases by continuous contact printing onto Eastman 7389 and

processed in a modified ME-4 process.

The shortage of lab services is probably because labs have not yet been convinced that there is a significant volume of business in Super-8 original production to merit gearing up the expensive liquid-gate Super-8 printers. Most labs have been committed to Super-8 as a release print medium for years, with the principal original stock being 16mm Ektachrome Commercial — a low-contrast color reversal original. This stock was generally reduction-printed two-up onto Eastman 7387 or 7390 16mm perforated 1-4. For large quantity release an Eastman 7271 internegative was usually prepared, either two-rank on 16mm stock or four-rank on 35mm stock with five rows of Super-8 perforations. Quantities of color-release prints were made on Eastman 7381 or 7383, either two-rank or four-rank.

The problem is that few Super-8 producers require the volume of printing that could merit the preparation of four-rank internegatives, and 7271 is intended for use with low contrast original in any case. Kodak has recommended an interpositive two-rank reversal master on 7252, and this could then be printed onto 7387 or 7390 reversal color print film. George W. Colburn in Chicago is offering these services and with a Super-8 liquid gate. The cost of all these steps is, of course, as great as, or greater than, comparable steps starting with 16mm original. Colburn also has the capability of producing a 7271 two-rank internegative by a low-cost con-

tact print in two steps from the Super-8 original, and is studying the possibility of a 7247 blow-up internegative on this newest 16mm color negative stock.

The lowest-quality and most common procedure is a straight reversal contact print onto Eastman Ektachrome R 7389. Many 16mm labs use 7389 as a reversal master, and this will no doubt occur also in Super-8, with prints then made also on 7389. Some Super-8 labs are offering single-strand contact prints onto 7389, so they can sell just one print at a time, as does Kodak's Consumer Print and Processing services. Newsfilm Labs in Los Angeles has a large quantity of pre-stripped 7389 single-strand like that used by Kodak.

Most of the labs active in Super-8 original production have built their own printers, by custom modifying 16mm equipment. An example is the Super-8 Division of Bellevue Pathe in Toronto, whose entry into Super-8 is chronicled by Murray Fallen in another article. But now equipment manufacturers are beginning to respond to the new demands.

One notable new product is the Acme Mini-Printer Model 5800 from Producers Service Corporation, Glendale, California. This is a lab-quality low-cost (\$13,500) optical printer with four basic modes of operation: 1) single-strand Super-8 original to a Double Super-8 print; 2) single-strand Super-8 original blow-up to a 16mm print; 3) 16mm reduction to a Double Super-8 print; and 4) 16mm original to a 16mm print. The projector section accepts 1000 feet of original film and the camera section accepts a 1200-foot magazine loaded with 16mm film or 16mm film perforated Super-8 (1-4). Camera and Projector sections both run in forward or reverse, and have freeze frame/stop motion. The lens system includes filter holders for color and density correction, and a variable shutter allows fades and dissolves. The Mini-Printer has a 103mm Eastman Ektar lens for 1-1 printing and an 89mm Eastman Ektar lens for reduction and blow-ups, and is built for daylight operation.

For laboratories requiring additive color correction, scene-to-scene automatic timing, liquid gate, double-image, lenses for single-pass multiple printing, etc., Cinecraft, International of

Continued on Page 1315

Type of Film	Type of Color Balance	Daylight	Filter/ASA Photo Flood 3400°K	464 Tungsten 3200°K	464 50' Silent	594 50' Sound	200' Silent	200' Sound	580 100' DS8	604 400' DS8
KMA Kodachrome 40	A 3400°K	85/25	none/40	82A/32	X	X			X	
EMA Ektachrome 40	A 3400°K	85/25	none/40	not rec.	X					
ELA Ektachrome 160	A 3400°K	85/100	none/160	82A/125	X	X				
EG Ektachrome Type G (Indoor/Outdoor)	G any light	none/60	none/160	none/160	X					
EFB Ektachrome EF (7242)	B 3200°K	85B/80	81A/100	none/125	X	X	X	X	X	
ECO Ektachrome Commercial (7252)	B 3200°K	85B/16	81A/100	none/25					X	X
SM Ektachrome SM	B 3200°K	85/100	81A/125	none/160			X	X		
PXR Plus X Reversal 7276		- /60		- /40	X				X	
TXR Tri X Reversal 7278		- /200		- /160	X				X	
4XR 4X Reversal 7277		- /400		- /320	X				X	

PROFESSIONAL SUPER-8 EDITING EQUIPMENT

Quiet but rapid progress in the development of Super-8 editing hardware has resulted in a stunning array of such equipment currently available

By GUNTHER HOOS

During the 1974 *Photokina*, an Eclair spokesman explained that one of the reasons why Eclair was not rushing their Super-8 camera to market was the lack of professional film handling and editing equipment. "After all," he said somewhat airily, "what's the good of a superior film image, if you can't edit it after you've shot it?"

In 1972, he might have had a point. But he said this in 1974 while at least eight firms, including KEM and Steenbeck, demonstrated their Super-8 editing hardware in the same building.

He was not being arrogant. Like many others, deeply involved in the traditional film business, he had simply been unaware of the quiet but rapid progress in the development of Super-8 editing equipment. Where in 1972 even Super-8 synchronizers were hard to find, by 1975 it had become possible to cut a Super-8 film on a very elegant ten-plate horizontal table.

What's more, rather than rushing off to a \$100.00/hr sound mixing studio, the filmmaker would simply convert his editing table to the mixing configuration. He would then mix multiple sync track to a master and finally, still on the same table, transfer the mixed track in sync to his edge-stripped film.

This article presents a summary of presently available and soon-to-be available editing hardware. Most of the equipment is in full production and into second and third generation models. The quantity and diversity of the equipment is astounding.

Super8 Sound, Inc.

Super8 Sound's contribution to double system editing is represented by three elegantly conceived motorized vertical editing benches. Three models are currently available, the original bench with one picture and one fullcoat track (\$795.00), as well as two new models built around a four gang Moviola synchronizer. The main difference between the two new models is that one has two sound heads and the other three. (\$1025.00 and \$1090.00 respectively)

All three benches include a 24 fps motorized synchronizer activated via a foot-pedal and engaged with a very quick-acting electric clutch. Starts and stops are on the frame without coasting. Changeover to manual forward/rewind is quick. Fullcoat sound is read with a clever sliding magnetic head assembly mounted in editorial

sync with the picture. This head can be moved 12 frames in either direction of center to help establish sync without necessitating removal of the entire fullcoat strand from the synchronizer. As nice as this feature is, I wish that the head assembly would truly slide rather than jerk. Perhaps the addition of a roller would help. Oil or graphite help a bit.

The sound quality is adequate for editing purposes. To get the thing to sound its best really takes a little practice in coordination. It's mainly a problem of applying the proper tension (drag) to the supply reels, and in not yanking too hard on the takeup while the motor pulls the fullcoat past the sound heads.

The synchronizers have been modified by the addition of "outriggers". These handy gadgets pull the film free from the sprocket teeth when the synchronizer roller arms are released, but continue to hold the film on the rollers during fast rewind/forward of single or multiple strands. These outriggers help to save you from yourself by preventing the disengaged film from dragging over the synchronizer sprockets. When reengagement of the film is desired, the outriggers make the process very quick.

The outriggers also serve another function. The Minnette viewer has a closed gate, and unless you want to punch out the edge of the film frame in the gate, there is no way to mark the frame at the gate. The outrigger con-

tains markers superimposed over the frame indicator disk of the synchronizer. By the fact that the viewer gate is exactly 50 frames from the center mark of the synchronizer, the displacement markers on the outriggers allow quick alignment of both sound and picture frame at the frame pointer of the synchronizer. Here the cuts are easily marked and the edits made.


The new benches also come with a little crank mounted on the synchronizer shaft. This crank introduces some semblance of speed control when hand-winding. It also permits quick location of cut and sync marks.

A device most useful when working with two strands, is the differential rewind adaptor. (Standard equipment on the two gang bench). This Super-8 Sound Original has a number of functions. First, it adapts the Super-8 reels for use with standard 16mm professional rewinds. Second, because of the differential action between the two reels, either strand can be moved independently of the other without the usual tedious clamp and spacer adjustments. Third, the differentials allow reels of unequal diameters and fullness to take up evenly. Since fullcoat is much thinner than film, this feature is very important in maintaining the editor's sanity.

Before we received our differentials, a disproportionate amount of energy and frustration went into the effort of keeping the film and fullcoat from spill-

In the editing room at Super 8 Film Group, author Gunther Hoos works with the MKM Model 824 tabletop horizontal editing console. Whereas in 1972 even Super-8 synchronizers were hard to find, at present it is possible to cut a Super-8 film on a very elegant 10-plate horizontal table. The quantity and diversity of Super-8 cutting equipment now available is astounding.



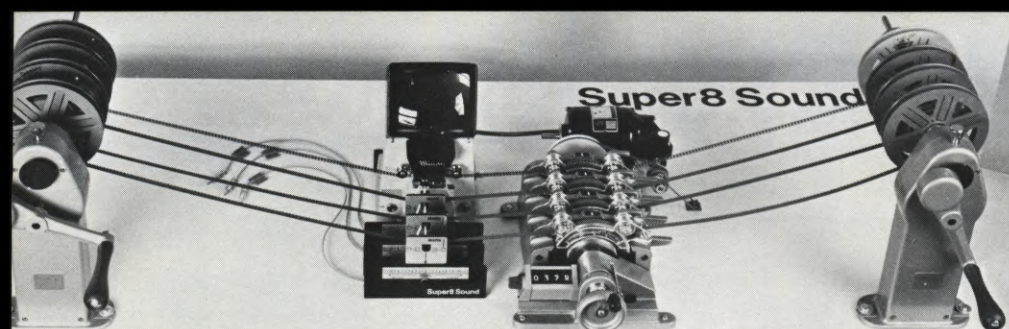

The Super8 Sound 4-gang editing bench provides the economies of vertical editing, combined with the design innovations that make vertical editing in Super-8 a vast improvement over conventional 16mm vertical set-ups. Unique "Third Hand" devices on the rewind arms prevent film spillage and automatically hold back on the supply and take-up reels; no film bins or bench top holes are necessary. The synchronous motor drive is activated by means of a convenient foot clutch.

ing all over the editing table.

All models of the bench come equipped with the Minnette S-5 viewer. This viewer has a long history of durability, brightness, and gentle film handling ability. Order several replacement lamps. For some reason, these lamps are hard to find. On a recent desperate search in New York, it took five hours to locate two lamps.

The editing benches also come equipped with 16mm professional rewinds, friction drags, and long shafts. A pre-drilled Formica mounting board completes the setup.

Other than the extra two gangs, the four-gang model differs only in that differentials are not used. To accomplish essentially the same results, Super8 Sound modified the rewinds with "third hand" rewind clutches that automatically hold back on the feed reel. By locking the synchronizer and releasing the desired outrigger, the third hand, in conjunction with smooth-acting spacers and hub adaptors, allows a single strand of film or fullcoat to be moved independently of all the others.

In addition to all the hardware, these benches come equipped with very detailed operation and assembly manuals. The only item not included is a squawk box.

To my mind, the four-gang model is really the most useful. Not only can three sound tracks be simultaneously cut, but later, the film can be conformed into A & B printing rolls. A set of differentials is included for use in the two-gang mode.

What with differentials, third hands, outriggers, sync tuning, and displacement markers, these benches may at first appear a little strange. Take courage. Read the operations manual carefully and sit down to edit. In a few hours you will be cutting as efficiently as if you had a horizontal table costing from two to five times as much.

Specialties Design & Manufacturing Co.

The Specialties editor is a very economical and versatile editing tool

Designed from scratch, this compact unit incorporates a powered four-gang synchronizer operable either manually, or, via a foot switch and magnetic clutch. It is driven by a synchronous motor at 24fps and includes a footage/frame counter.

The unit is designed to work with the Minnette S-5 viewer on one gang and three magnetic heads on the other three gangs. A three-channel solid state mixer-amplifier with individual and master volume control is built in. A speaker is also built in. Sound quality is adequate for editing and pre-mixing. A fluorescent light well, very useful in A&B roll preparation, is built in directly in front of the viewer and adjacent to the synchronizer. The basic price (without rewinds and viewer) is \$595.00.

In practice, the editor would sit on a table between a set of rewinds. The viewer would be positioned so that the film path is directly in line with the rear synchronizer gang. Picture and sound would not be in editorial sync since sound is read at the synchronizer, while the appropriate picture appears some distance to the left.

To edit with this machine, the filmmaker must first locate the viewer at some definite point left of the synchronizer frame pointer. Let's say 60 frames. This location should then be marked so that the viewer can always be put in this position during editing.

Then, assuming that picture and sound are in sync and that a cut will be made, the frame-counter disk is zeroed on the desired sound frame. By moving the synchronizer 60 frames forward, the picture frame corresponding to the sound frame will be opposite the frame pointer. The frame is marked and the cut is made. It is not as simple as in line sync, but it's adequate.

MKM Industries, Inc.

Karl Murgas, president and principal engineer at MKM Industries of Skokie, Ill., stands as a pioneer in the field of Super-8 horizontal table design. The model 824 Super-8 four-plate

editing deck evolved from a personal need. Murgas found the available Super-8 editing systems to be unworkable, so he designed his own. The table was introduced in 1973 for \$1200.00. This summer, the first models of the second generation machines will be delivered. Current price for a complete machine is \$2000.00.

The present model features a very bright ground glass projected image (3.75x5"), 750 ft. reel capacity (almost 40 min at 24fps), 24fps sync speed with pushbutton/in/out, a variable speed motor drive from 1-65fps forward/reverse, instant on-frame stop/start switch that stops the film from any speed, an inching knob, a solid state amplifier and built in speaker, a flywheel stabilized sound head for Super-8 fullcoat, independent torque motors with cutoff switches for each supply and take-up plate, common AC start in sync for interlock with other AC sync fullcoat machines, modular component assembly for fast repair by the filmmaker or the factory (only the defective module is sent out, not the 100 pound table), and of course a declutching mechanism to allow independent transport of tracks.

Options include a two channel amplifier (\$125.00), a flywheel stabilized single system sound stripe reader (\$145.00), and an extension speaker (\$45.00). For video use, a TV safety mask will be available soon. U.S. distributor is Cinecraft International. European distribution is handled through Kem Electronic Mechanisms Ltd., London, England.

Apart from the technical improvements, the new model has new human engineering. The controls have been more logically grouped and allow the activating hand to rest on the edge of the deck during operation, rather than having to remain suspended in space. The threading path has also been redesigned so that proper film tension is easily achieved.

Unquestionably, the MKM is a fine piece of engineering and is built to withstand considerable abuse by novice editors. Chances are that it will work troublefree for many hundreds of hours. The model in our studio, used at least 50 hours per week, needed service only after about 1200 hours. Nevertheless, a couple of items should be considered.

There is no real advantage to the deck format. All it does is shrink working space, limit the placement of controls, and necessitate the building of a special height table to accommodate the machine. Lack of

work space is the worst complaint that I have. In splicing, it sometimes happens that control buttons are bumped by the splicer, causing the machine to start moving at the most awkward moments.

Despite the fact that a hood has been added to the viewing system, there is still a lot of light spill. A tighter and more enclosing gate is needed.

Expensive or not, a decent frame/footage/time counter is sorely needed. The present version simply tells you how many times the sprocket wheel has rotated. You must multiply by 16 to get a frame count. Perhaps a digital counter could be offered as option.

Finally, there is a great need for a comprehensive user's manual and for a trouble-shooting guide. Many Super-8 filmmakers are new to film and to complex equipment. They need all the help they can get. A good model would be the Super8 Sound recorder User's Manual.

As useful as the four-plate machine is, more exciting still will be the new six-plate model now in prototype and planned for late 1975 production.

The machine has been designed to be more than just an editing table. Tolerances in the fullcoat sprocket drives and flywheel stabilization have been engineered to permit high-quality sound transfers, re-recording, and mixing.

In its full postproduction configuration, the picture track will have record/playback capability allowing playback and recording of magnetic edge stripe as well as fullcoat. The other two fullcoat tracks will be able to record and playback.

Thus, single-system sound film can be edited double-system by transferring the sound from the mag edge stripe to one of the fullcoat tracks. After conventional editing and a mix, the sound can be rerecorded on the mag edge stripe with the proper 18fps picture/sound separation.

Using common sync start, the table can be interlocked with any number of fullcoat recorders for more complex mixes or to record a master track.

If the filmmaker already owns one of the MKM four-plate editors, a mechanical interlock is possible to provide 2 picture/3 sound track editing capability.

The basic six-plate table will sell for less than \$4000.00. With various recording amplifiers, a mixer, an equalizer, a frame/time digital counter etc. its cost will be about \$5000.00. The first production model will be introduced at the upcoming SMPTE Conference in Los Angeles.

Super8 Research Associates, Inc.

The Super8 Research series of horizontal tables, after almost monthly design changes, finally seem to have arrived at a final version. Rick Minicucci and Sam Roney have designed a truly versatile postproduction console for the Super-8 filmmaker.

The current models, due for changes this fall, are all modular in design. The table is expandable from a basic four-plate to a ten-plate with three sound tracks and two picture heads. Current prices run from \$2600.00 to \$4500.00.

The features of the table are impressive. Independent electric clutching allowing fingertip switching control of sound and picture. Manual inching of each track. 24fps sync drive system. Variable speed motor permitting 0-120 fps forward/reverse. Independently switchable torque motors for each take-up/supply reel. Single lever transport function control (sync, variable speed, forward/reverse). Large drive sprockets for safe unstressed film transport. (Masking tape splices even go through) The viewing system employs a modified Minette viewer with quartz light. Pulldown sync is possible. The table is designed with excellent work space.

As it stands, the PPC-25 is a honey of a machine, but some improvements wouldn't hurt. Granted, viewing systems are not easy or inexpensive to design. However, considering the possible applications of the table, a really high-quality viewing system is required. At the present, it is impossible for more than one person to see the image. In fact, one person cannot glance at both picture heads without some head craning. It has been my experience that there are always people who need to sit in on an editing session or for an interlock runthrough. Unless they can see, it will be an unhappy experience. Use of the Minette viewing systems should be a stop-gap measure only.

The sound on current machines is a bit unsteady. It can be greatly improved with an optional flywheel (\$100.00). It should not be an option. Without the flywheel, the sound is about on a par with a motorized synchronizer, a condition no respectable flatbed should long endure.


But enough, those who already own the machine have learned to live with it and those who don't have the new improved version to look forward to. The new model designations are PPC-35M and the PPC-45M.* The new models will be available in 6 or 8 plate versions (\$3895.00 and \$4495.00). Additional Picture heads will cost

\$800.00 each.

These new machines, they say, will truly be postproduction consoles. They will edit and they will mix. Not only that, but they can lock to a digital pulse train and resolve to Super-8 fullcoat. Full recording capability for mag edge stripe and fullcoat is part of the plan. Separate high quality heads for mixing and transfer will be provided. Special threading paths during recording and mixing will serve to stabilize the sound. All sound transports will be flywheel stabilized. A digital footage/time counter will be an option. Common start for interlock with other sync machines will also be provided. Optionally, the machine will be convertible for full large-screen projection. Available this fall, this new version of the PPC will definitely be worth waiting for.

Another new machine, now available, is a very basic (and I stress basic) four plate editing deck. For only \$1095.00 you can edit horizontally. You should not expect an overly sophisticated machine however. There is no amplifier. You provide it. There are no flywheels. If you want them, they cost \$100.00 each. If you want a mag stripe
Continued on Page 1302


More and more excellent Super-8 splicers, utilizing both tape and cement, are becoming available on the market.

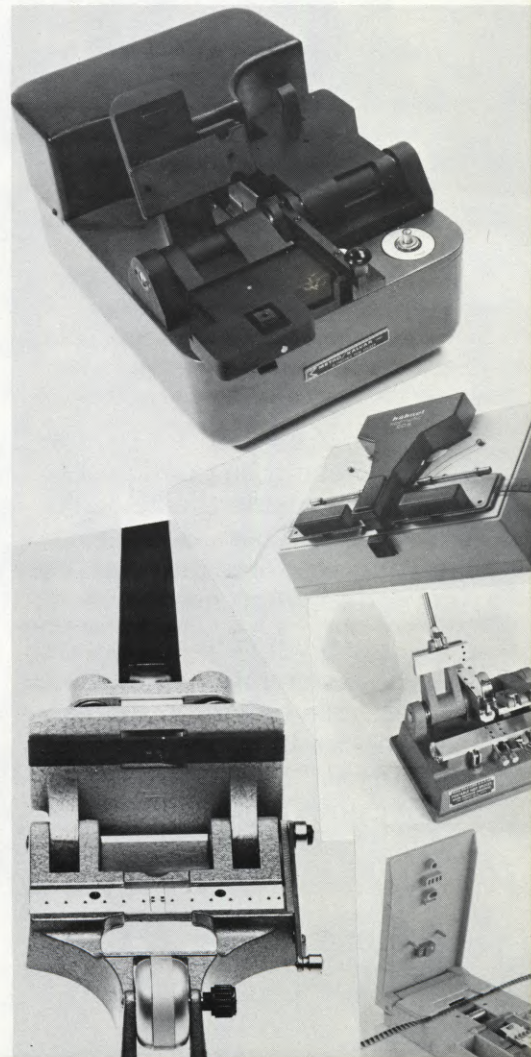

Film speed enhancement at CFI

Comments by cameramen on CFI's AL200 and AL400 system with EK 5247 negative:

“We wanted to create a documentary look for *Streets of San Francisco*,” says Director of Photography Jacques Marquette A.S.C., in the August *American Cinematographer*.




Jacques Marquette A.S.C.

200 or 400 ASA

“Our tests with CFI showed that 5247 could be rated at 200 or 400 ASA, using their AL200 and AL400 process. So we went with that for some location interiors and night scenes.”


5 foot candles!

“On some problem locations, we were able to light as low as five foot candles,” says Mr. Marquette. “In general, minimal lighting gave us the realistic look, and it let us make faster setups.”



Jack Swain A.S.C.

Jack Swain A.S.C. says: “Using AL200 saves time and energy. Shooting *Cannon*, I use it all the time for ‘live’ interiors. It looks as good as footage shot at ASA 100.”



Robert Hauser A.S.C.

“On one feature that I shot, I had some 5247 forced at another lab — and there was grain running all over the place,” says Robert Hauser A.S.C.

Choose the lab

“The producers had a deal with that lab. But after I protested, they told me to send the footage for forcing wherever I chose.”

Night at 3 PM

“On another show,” says Mr. Hauser, “We suddenly got a hailstorm at 3 PM. The sky had to be in the background — and it was literally like *night*.”

Off the meter

“I had *one* light, pulled way back to balance the actor’s face against this black sky. I decided to go to AL400 — and even then... the reading was f/1.2.”

ASA 400 day ext

“So once again, I told the producers: If you want this shot, it has to go to CFI. It looked fine.”

CFI

SINCE 1924

CONSOLIDATED FILM INDUSTRIES
959 SEWARD STREET, HOLLYWOOD
CALIFORNIA 90038 (213) 462-3161


AT CFI, AL STANDS FOR AVAILABLE LIGHT.

14 reasons why you should subscribe to SUPER-8 FILMAKER.

At last, a magazine all about Super-8! Here are just a few articles in recent issues that show why you should take advantage of this special free complimentary offer. What are you waiting for?

- 1 Professional film houses use Super-8 to underbid jobs & boost revenue.
- 2 How to earn extra money shooting local newsfilm on Super-8.
- 3 Now available: Super-8 A&B rolls, splice-less prints, edgenumbering.
- 4 Complete guide to over 35 Super-8 film stocks.
- 5 Best way to blow up from Super-8 to 16mm.
- 6 The story behind a major TV documentary shot in Super-8.
- 7 Save money using the latest Super-8 animation equipment.
- 8 Where to go for Professional Super-8 lab services.
- 9 Richard Leacock talks about what Super-8 means to the Professional.
- 10 Do-it-yourself Super-8 film developing.
- 11 How to get Professional big screen projection out of Super-8.
- 12 Combining Super-8 and videotape to make a successful production.
- 13 Comprehensive review of Super-8 sound systems.
- 14 Professional fullcoat recording comes to Super-8.

What it all boils down to is that you owe it to yourself to stay abreast of Super-8 developments. Now you can, starting with your free complimentary issue. You'll end up with either one great issue of SUPER-8 FILMAKER for nothing. Or six great issues for only \$6.00. What are you waiting for?

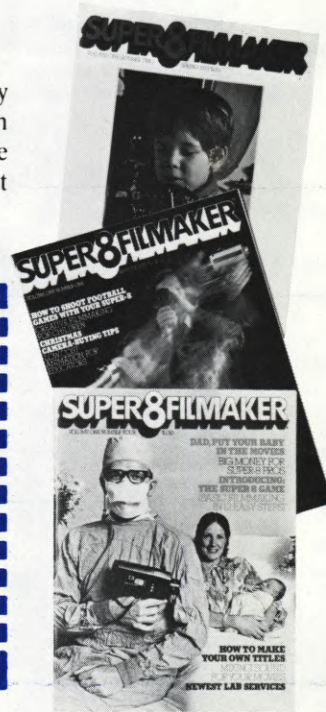

SUPER-8 FILMAKER

10 Pelham Parkway, Pelham Manor, N.Y. 10803

Please send without cost, obligation or commitment my complimentary copy of the current issue. If I like it, bill me for a year's subscription (5 additional issues for a total of 6) at the low rate of \$6. If I don't like it, I will write "Cancel" across your bill, return it, and that will be the end of the matter. In either case, the issue is mine to keep.

Name _____
(please print)

Address _____

City _____ State _____ Zip _____

Add \$1.00 for Canadian and Foreign.

321

SUPER-8 SYNC SOUND PROJECTORS

The projector is much more important in Super-8 filmmaking than in 16mm, because it is often used to transfer sound from fullcoat to edge-stripe

By ROBIN OGDEN

The projector plays a much more important role in Super-8 filmmaking than it does in 16mm. The reason is that the Super-8 projector is often used as part of the sound transfer system for getting sound from fullcoat to magnetic edge stripe (and from stripe to fullcoat in the case of single-system original films). Filmmakers doing their own sound transfers may find it necessary to own more than one machine — with one primarily for screening or presentation and another dedicated to sound transfer work. Active Super-8 producers will eventually use still other types of Super-8 projectors such as continuous-loop repeating projectors for exhibits, telecine projectors for video film chain work, Xenon-arc or metal-arc lamp projectors for theater use, and interlock projectors for screening a workprint with double-system sound just before final editorial decisions are made. Most of these types of projectors are available now in Super-8, and are described below.

Any Super-8 sound-recording projector can be adapted for sync work with the installation of an inexpensive sync signal generator, e.g., a one-pulse-per-frame (1/F) magnetic reed switch device. This sync signal is used to control the speed of fullcoat mag film

on the Super-8 Sound Recorder, matching up picture and sound on an exact frame-for-frame basis. All projectors supplied by Super-8 Sound are sync projectors, and Elmo is now supplying all its ST1200 projectors with the standard 1/F sync signal.

To start sound and picture in sync, both projector and recorder can be plugged into the same switched outlet box. When power is turned on, both machines make a "common start". If start frames of picture and sound are precisely at the gate of the projector at a calibrated point near the magnetic head of the recorder respectively, the two will start in sync and then remain in sync because of the Super-8 Sound Recorder's speed servo-control. A sync start method superior to common start is a photoflash start, in which a punched frame in opaque leader fires an electronic switch to start the fullcoat recorder. Super-8 Sound's PhotoStart device plugs into the remote control jack of the Super-8 Sound Recorder, and prevents the Recorder from running until activated by a bright flash of light, e.g. a scraped frame of an opaque leader, or a 1000Hz burst of bloop tone. This device insures a repeatable double-system sync start without the frame calibration required

for "common start", and works with projectors such as the Bolex SM8 which don't have the "inching knob" required to get the sync start picture frame exactly at the gate.

If you want to be able to stop and restart the projector, and even rewind, in sync, then you need the capabilities of a double-band (picture film and magnetic film) interlock projector. A machine with such rock-and-roll capabilities is available from Super-8 Sound and is described below.

The installation of a 1/F sync signal is a simple task that can be accomplished by any camera repair technician. Super-8 Sound provides a kit of materials — magnetic reed switches, magnets, mounting strips, adhesives, cable with wired DIN plug — and a set of basic instructions that cover installation of a 1/F sync contact switch in most popular Super-8 projectors. They also do installations.

ELMO ST1200 SYNC PROJECTOR


The Elmo ST1200 stands out as the best general purpose Super-8 projector currently available. It has the largest reel capacity (1200 feet, 365mm), one of the brightest lamps, the fastest projection lens available in a Super-8 projector (f/1.1, as an optional extra), and an automatic threading system that can be monitored by opening the projector side and (with difficulty) be unthreaded in the middle of a film. It handles fullcoat well, and it is almost impossible to damage film with the Elmo. The major drawback is the Elmo ST1200's poor sound fidelity on film spliced with tape. This is no problem for transfers to prints, or with a well-cemented spliced original, but every time a tape splice passes the loop former there is a significant wow, and occasionally a lost loop. It is easy to regain the loop with the loop former.

The Elmo ST1200 is the first Super-8 sound projector supplied directly by the manufacturer with a standard 1/F sync contact switch.

EUMIG PROJECTORS

The Eumig Super-8 sound projectors are the most widely used in the United States, primarily because they have been the lowest-priced adequate sound-recording and reproducing Super-8 projectors. The latest generation of Eumig machines have "High Quality Sound", a 10-watt IC

Super-8 projectors equipped with a once-per-frame sync switch may be used to transfer sync sound directly from Super-8 fullcoat magnetic film to the magnetic edge-stripe of a Super-8 print. A flash frame on the opaque leader of the picture film fires an electronic switch to start the fullcoat recorder.

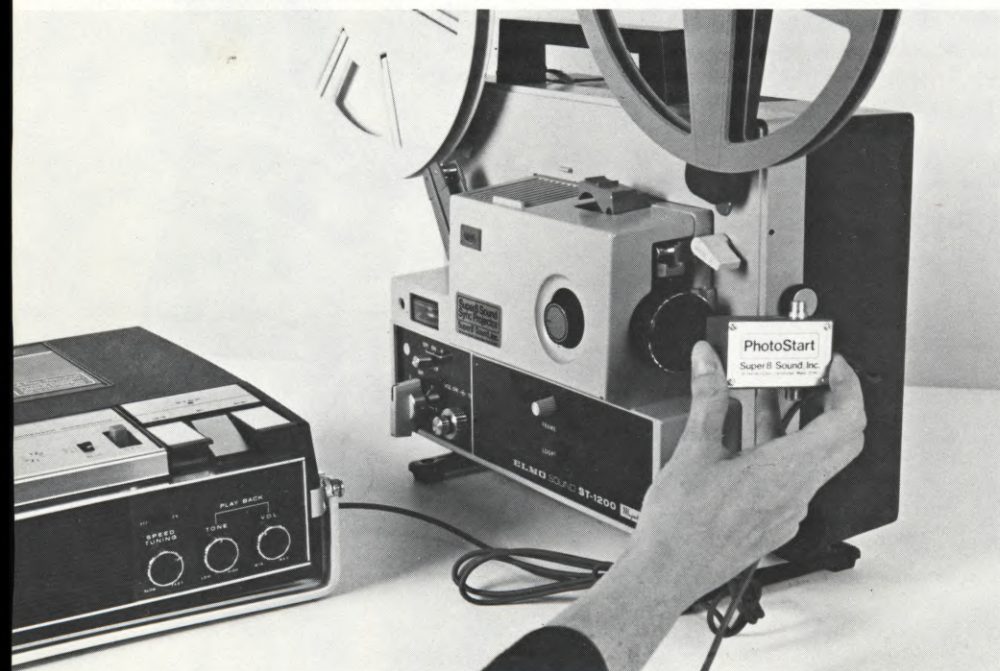

PROJECTOR	AMP POWER	FREQ RESPONSE	RECORD LEVEL CONTROL	INCHING	STILL	REEL CAP.	SPLICE HANDLING	LAMP			
								VOLT/WATT	ANSI CODE	LIFE/HOURS	LENS
Bolex SM8	8W	60-8500Hz	MANUAL (VU)	NO	NO	800'	EATS FILM W/TAPE SPLICES	12V/100W	EFP (P6834)	50	f/1.3, 15-25mm
Bolex SP8	3W	75-10,000Hz	AUTO/MANUAL (LED's)	YES	PREHEAT ONLY	600'	GOOD	12V/100W	EFP	50	f/1.3, 15-30mm
Bolex SM80	10W	75-10,000Hz	AUTO/MANUAL (LED's)	YES	PREHEAT ONLY	600'	GOOD	15V/150W	EFR	50	f/1.2, 12.5-25mm
Bolex SP80 Special	10W	75-10,000Hz	AUTO/MANUAL (LED's)	YES	PREHEAT ONLY	600'	GOOD	12V/100W	EFP	50	f/1.3, 15-25mm
Elmo ST1200	10W	50-9500Hz	AUTO/MANUAL (VU)	YES	YES	1200'	SOUND WOVES W/TAPE SPLICES	15V/150W	EFR	50	f/1.3, 15-25mm, f/1.1, 12.5-25mm, f/1.4, 25-50mm
Eumig S807	3W	75-10,000Hz	AUTO	YES	PREHEAT ONLY	600'	FAIR	12V/75W	(P6853)	NA	f/1.6, 17-30mm
Eumig 810 HQS	10W	75-10,000Hz	AUTO	YES	PREHEAT ONLY	600'	FAIR	12V/100W	EFP	50	f/1.3, 15-30mm
GAF 3000S	NA	100-5000Hz	AUTO	NA	NA	400'		12V/150W	DNE	12	f/1.3, 15-25mm
Kodak Ektasound 245	NA				YES	400'	EXCELLENT	30V/80W	DFE	50	f/1.3, 15-30mm
Kodak Supermatic 70	4W	100-5000Hz	AUTO/MANUAL (VU)	NO	YES	400'	EXCELLENT	30V/80W	ELB	15	f/1.3, 15-30mm
Kodak TVM100A	4W	100-5000Hz	MANUAL (VU)	YES	NO	1200'	EXCELLENT	21V/150W	DNF	25	f/1.6, f/2.0, f/2.5
Sankyo	NA	NA	AUTO/MANUAL (VU)		NO	600'		12V/100W	EFP	50	f/1.4, 15-25mm
Silma Bivox D-Lux	4W	100-7000Hz	MANUAL	NO	PREHEAT ONLY	600'		12V/100W	EFP	50	f/1.3, 16.5-30mm
Videotronic Compact	5W	NA	NA	NO	NO	400'		21V/150W	DNF, ELZ, ELV	25	

Sync Projector Data Table

A note on sound projector fidelity: Figures quoted here are as supplied by manufacturers, who vary widely in their criteria for frequency response, power output, etc. Power is generally quoted at the 5% distortion level. Frequency response is generally quoted if there is any response — a few manufacturers also give the range over which response is linear within a certain \pm dB figure. Most projectors have a significant 24 Hz flutter component, at least .2%.

amplifier with excellent frequency and signal/noise ratio. They have an inching knob and a dimly visible still frame illuminated by the lamp preheat position. They have automatic threading, automatic gain control only. There is no VU meter. They have a significant 60Hz hum on playback (you must learn to adjust the hum-bucking coil) and it is essential to have an equalizer with a 60Hz cut for transfers from strip to full-coat. They handle fullcoat well, but are unforgiving if improperly loaded and occasionally chew up polyester-base films.

BOLEX PROJECTORS

The Bolex SM8 is a very sturdily built projector. It is reliable with well-cemented acetate base splices. It has a VU recording meter and manual gain control. However, it is autothreading, and cannot handle fullcoat or polyester-base Single 8 films. It often buckles at a tape splice and chews up the film in the top sprocket. There is no inching knob and no still frame.

The Bolex SP8, SP80, and SM80 are built for Bolex by Eumig and are mechanically similar to the Eumig projectors — inching knob, dim still frame, 60Hz hum, and no VU meter (LED's are used for record level). They have manual gain control as well as auto-

matic gain control. Bolex too have added superior integrated circuit electronics to their latest machines.

KODAK SUPERMATIC 70 PROJECTOR

The Supermatic 70 is Kodak's compromise between a conventional projector and a continuous-loop cartridge projector. It accepts film in Kodak Supermatic cassettes, and projects them onto either a built-in Ektalite screen or a standard wall screen using just one lens. It has high speed automatic rewind through the gate, and is ready to restart moments after showing the film. It has still frame, automatic or manual gain control, and a VU meter. The same Supermatic cassette fits the Kodak Videoplayer VP-1 or VP-X.

EASTMAN SUPER 8 VIDEOFILM PROJECTOR TVM100A

The TVM100A is a conversion of the rugged Kodak Pageant chassis and is probably the heaviest-duty Super-8 projector on the market today. An open port on a multiplexer is all that is required to give a TV station full Super-8 capability. The TVM100A is AC-synchronous at 24 fps. It's 5-bladed shutter produces 120 images per second. It has remote control of all functions, and

an inching knob, but no still frame. It has automatic threading through the gate. The lamp is a 21V/150W ANSI code DNF, with a 3-level lamp switch. A neutral density or color correction filter holder is provided. It has manual gain control with a VU meter.

ELMO TC1200 TELECINE PROJECTOR

Elmo makes a telecine version of their fine ST1200 projector. 60Hz (U.S.) and 50Hz (Europe) versions are available. The 1200-foot reel capacity (360m) holds one hour of film, with magnetic or optical sound tracks. The Elmo TC1200 has a special telecine lens (25-50mm), and a 15V/150W lamp. The automatic threading is removable in the middle of a film. The 60Hz version produces 120 images per second; the 50Hz produces 50 images per second. It has remote control of forward projection only.

CONTINUOUS-LOOP SUPER-8 PROJECTORS

These cartridges projectors are highly portable rear-screen projectors (some with optional front screen), usually packaged in an attache case. Console versions are also available. They allow Super-8 sound films to be

Continued on Page 1281

SUPER-8 TO THE SUMMIT

A slap-happy Super-8 sync sound safari conquers Mt. Rainier, with the sustenance of Ding Dongs, M & M's, Budweiser six-packs and Kool-Aid

By AMBROSE SALMINI

"3 Climbers Fall Into Crevasse"

"Avalanche Buries Mountaineers"

"Rescue Helicopter Crashes Into Mountain"

"Frostbite Claims Toes, Fingers of 'Lost' Climbers"

Even though Jim Mitchell assured me the weather forecast was excellent, recent newspaper headlines like these spoke with a little more authority. I knew Jim had just spent four days bivouacked in a snow cave in some "excellent" weather. Jim is an internationally famous mountain guide who would be leading a group of climbing students up 14,410-foot Mt. Rainier in Washington State. I had been working on a series of survival education films with Jim, and he felt an instructional film on mountain climbing would fit in very nicely.

Jim couldn't understand why I wasn't enthusiastic about shooting sync sound while going over, under, around, and through glaciers, crevasses, avalanches — especially above 10,000 feet.

I was starting to run out of excuses.

"The rental shop won't let me have another thing unless I leave my car for deposit."

"Leave the driving to me."

"How can I load an Arri in blowing snow at 3:00 a.m. with freezing hands?"

Jim, not knowing a Panavision conversion from an Instamatic (I'd at least seen a picture of the Panavision): "Use that cartridge film that you can buy in all the drug stores."

"Don't be ridiculous, that's Super-8 film for those amateur cameras . . ."

Zap! I found myself repeating, ". . . Super-8 film for those

Setting up to shoot at "Base Camp" on Mt. Rainier. A variety of Super-8 cameras were used, shooting both double-system and single-system sound. The footage was shot for ultimate transfer to 2-inch video tape, with digital time code readout to aid in editing.

amateur cameras . . . long zoom lenses, auto and manual exposure, fast and slow motion, self-contained batteries, lightweight, portable . . ."

Three days later (artistic license) in the parking lot at the 5,500-foot level of Mt. Rainier I was desperately attempting to shove one more Super-8 50-foot cartridge in between a peanut butter and jelly sandwich and a first aid kit.

At some point the lightweight and portable concept became: the Hamton Engineering modified Nizo S56 and Sony TC124 cassette recorder for sync shooting; Kodak Ektasound 130 for research and development purposes (also to separate Ding Dongs from extra socks); Bauer C5XL modified with a once-per-frame contact switch; Minolta D-6 with Intervalometer; Super8 Sound Recorder to shoot sync with Bauer; Sony TC55 cassette recorder for wild sound; Bolex tripod with small Miller fluid head; Mountain Safety Research rock helmet modified by me for POV shots; Bolex 233 camera for mounting on helmet; Instamatic X15 for still photo documentation; and 50 cartridges of the amateur stuff.

My brother, Peter, usually acts as sound operator/gaffer/grip/gofer. He had conveniently chosen this weekend to shoot a documentary about water skiing on Lake Washington. Thus, Jeff Tobolski, a local pilot/fisherman/tape-gap expert, was recruited as sound operator/tape-gap expert/Sherpa (a Sherpa is one who carries your equipment, gets paid very little, and calls you Sahib). We dispensed with the Sahib routine and shot a couple of quick interviews in the parking lot as the sun went down Friday night.

Thinking out loud, I mumbled, "If I leave my first aid kit in the car I'll have room for five more film cartridges and a pack of M & M's."

Jim emerged from the Ranger Station where we had all registered. "Looks like another group fell into a crevasse up on top . . ." Then, without a pause, ". . . Make sure you all have your 12 essentials — extra wool clothing, emergency food and shelter, water, waterproof matches, candles, fire-starter, flashlight with extra bulb and batteries, map and compass, a signalling device, knife, extra sunglasses, and a first aid kit. We're leaving in five minutes."

Although I had planned more extensive coverage of the parking lot departure, it was now 9:00 p.m., Friday, and Jim planned to climb for an hour or so before camping at the base of the Nisqually glacier. Jeff and I filmed a bear going through garbage cans with the Super8 Sound Recorder and the Bauer C5XL and then decided to leave them in the car. The Super8 Sound Recorder has proven to be an excellent resolving, dubbing, transferring machine in the studio — but it's a bit heavy to haul up mountains. The C5XL is a fine existing light camera with a 5-to-1 zoom that runs at 24 fps. With a 230-degree shutter, f/1.2 lens, and Ektachrome ELA 160, it's damn near possible to shoot by moonlight. The Bauer was modified by Willie at Professional Camera Repair in New York City, who added a once-per-frame contact switch — this contact switch is necessary for many of the sync systems now on the market. Some Bauer people tell me their repair facilities are capable of making this conversion quicker and cheaper, but I haven't checked. The C5XL works especially well at rock concerts where the noise of its 60 H.P., two-cycle engine is easily mistaken for a drum roll.

Continued overleaf





(LEFT) The climbers on Mt. Rainier, buffeted by icy winds and cheered by the roar of recurrent avalanches, arrive at the conclusion that it would be a nice day to shoot a water-skiing documentary on Lake Washington. **(LEFT)** On the summit of Mt. Rainier, Jim Mitchell records the historic moment for posterity with a Hamton Engineering-modified Nizo S56 camera synced to a Sony TC124 cassette tape recorder.




"Man from Mars" rig features a Bolex 233 camera mounted on Mountain Safety Research helmet, with cable release.



The author waiting to be pulled from crevasse during filming of crevasse rescue practice prior to Mt. Rainier summit climb — a requirement.



Shooting with Ektasound 130 on summit of Mt. Adams. Note Mt. Rainier in background. In snow, over-exposure of 1/2 to 2 stops is required to photograph people.

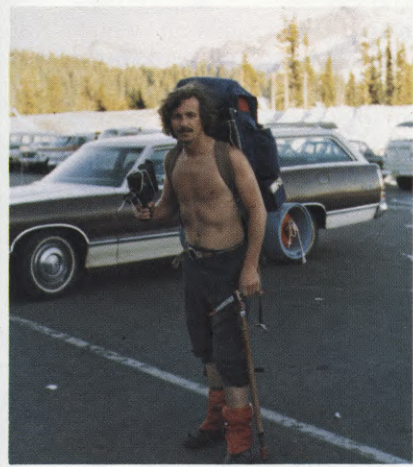

(ABOVE LEFT) The author, with one of the four cameras he hauled to the summit. **(CENTER)** The magnificence of 14,410-foot Mt. Rainier, as seen from 50 miles away. **(RIGHT)** Array of Super-8 equipment carried to the summits of Mt. Rainier and Mt. Adams. **(BELOW LEFT)** Filming with helmet-mounted Bolex 233, while crossing crevasse in which two climbers had just spent 56 hours awaiting rescue. **(RIGHT)** Jim and Nancy Mitchell during early summer filming of survival education series.



Crisis #1 struck when Jeff attempted to pull on his back-pack. With the help of two innocent bystanders he got strapped in and began calling me many different names, none of which was Sahib. Crisis #2 struck when a third bystander had to be called over to help the other two lower the pack on my back. I began yelling about six-figure budgets and National Geographic Specials where camera operators only have to carry a light meter. Then Jim gave his inspiring, "Because it's there!" presentation. Twenty yards from the parking lot, still deeply inspired and only slightly exhausted, Jeff turned to me —

"You forgot something."

Thinking I had enough film, batteries and equipment for a twenty-six week series, I cautiously asked, "What?"

"You forgot to put the Budweiser in the cooler."

A serious error, quickly corrected — as I say, these Sherpas work for cheap wages.

The local lab seems to hate Super-8, and they take it out by processing my EFB 7242 in warm bath water and cleaning it with wire brushes. If nothing else, they are consistent. I've tried several different labs with the Ektachrome EMA 40, and it always comes back soft, grainy, washed-out, etc. — must be the film. As with larger formats, some emulsion batches just seem to be bad — perhaps a function of Kodak "stock" on Wall Street. The "2 stops more fun film," Ektachrome ELA 160, is a good original for prints on Ektachrome 7389, and it's only one stop more expensive. I had thirty cartridges on my back. Jeff carried twenty cartridges of Kodachrome II so we could qualify as amateurs and thus avoid getting releases from the climbing party. I also planned to go directly to 2-inch videotape with the finished film, so I wanted different stocks to play with.

Secure in the knowledge that the Buds were now getting cold, we shifted into high to catch up with the pack. Soon we were 50, 60, then 70 yards from the car. I wanted to get some silhouette shots against the full moon overhead. "Pat on the Back" #1 goes to me for rigging a camera harness which allowed one hand to get warm in a pocket and the other to get cold on the ice axe. At all times in the climb I had a camera in position ready to film avalanches, falling climbers, Yeti (Abominable Snowpeople — locally called "Sasquatch") and occasionally I got the lens cap off in time to get something.

Spectacular shot #1 was accomplished with the Ektasound 130 (Yup!) and 160 film. The Bauer stayed in the car because I couldn't see hauling two XL cameras — the 130 went for political/financial reasons (a product report for the National Enquirer). Moonlight reflecting off the snow gave a sacred existential glow to the climbers.

Although the Ektasound 130 only cranks at 18 fps, the silent footage could easily be cut with the 24 fps footage (most uphill climbing takes place at a snail's pace — it's the head-over-heels downhill footage that's a little jerky).

We had a slight 40-degree slope to go down to reach "Base Camp". I remembered to yell "Falling!" just as I reached terminal velocity — then remembered it only helped to yell "Falling!" if you are on a rope team and the other team members can help you stop. I got my ice axe in the full stop position in time to see Jeff go by head-first. We both laughed this off 300 yards below until I realized my camera insurance policy covered floods, nuclear blasts, earthquakes, exorcisms — but nothing about crevasses.

Fortunately, Jeff had turned on the Sony TC55 before he fell, so we already had some nice documentary sound of a Sony ECM16 mike flailing down a snow field. This technique of anticipating exciting events proved to be very valuable in the course of the next few days.

Although my down sleeping bag had been advertised "good to 30 below" and priced accordingly, it apparently

hadn't been tested with 3 cameras, 2 boots, 2 quarts of water, \$30 worth of batteries, and 1 body. As mountaineers affectionately put it, "I slept cold." I dream of helicopters, five-figure budgets, the parking lot — and woke up with the imprint of a Minolta D-6 in my left side.

Our gourmet breakfast of Ding Dongs and Kool-Aid hardly digested, we decided to get up ahead of the party for a potentially beautiful sunrise shot. We spent the next hour trying to differentiate a Singapore Slip Knot from a Bowline. Finally roped up with prusiks in place (a prusik enables a conscious climber to ascend from a crevasse), we crossed the Nisqually glacier and set up a telephoto shot with the Nizo on the tripod. The problem with the Nizo is that its Schneider lens is too "cold" — if that's a problem. It's hard to cut some of its crisp footage with that shot by the warmer Minoltas, Bauers, and Kodaks. The early Nizos had trouble pushing through some of the thicker emulsions, such as Tri-X. The "multiple imaging" on single frames that resulted was a nice effect, but, unfortunately, there was no way of predicting or controlling it. This apparently can be completely corrected with a take-up torque adjustment. The blimped crystal-controlled Nizo modified by Hamton Engineering was the first and perhaps the best of the professional Super-8 sound cameras ever manufactured. Unfortunately, production was stopped several months ago — but many other manufacturers have jumped in with continuously upgraded lines of cameras and camera controls for both single and double-system filming.

Now the work began. Our objective for the day was Camp Hazard at 11,500 feet. This meant about five miles and 6,000 vertical feet, and that's a lot of Kool-Aid. In spite of the frequent need of cardiopulmonary resuscitation (air), Jeff was doing as fine a job as any high-priced Sherpa. From a precarious perch on a cliff, we shot some nice instructional sequences of Jim pulling people up the mountain.

Pat on the back #2 goes to Jeff for constantly reminding me to disregard automatic exposure readings when there's snow around. The automatic setting will make snow look like an 18% gray card and the brightness range is too great for the film to record. Depending on light conditions, it's necessary to overexpose anywhere between 1/2 and 2 stops to get the proper exposure for subjects on the snow. This tends to wash out the snow, but take your pick — two-dimensional silhouettes or washed-out snow.

When the sun got pretty high I threw an ND 0.50 filter on the front of the Nizo to bring the light down 1-1/2 stops to acceptable exposure levels for the diaphragm to handle.

Spectacular shot #2 was a time-lapse sequence filmed with a Minolta D-6. I got the climbers running up a 2,000 foot slope in six seconds. The Minolta Intervalometer P which I had can be adjusted to expose a single frame once every half-second or with other settings up to once every hour. This time-lapse stuff usually gets a laugh because it relieves the boredom of the rest of the film, so it was probably worth the extra ten pounds. I brought the D-6 along because from past experience I knew it would function even if everything else quit — even if I didn't sleep with it to keep the batteries happy.

We arrived at what was supposed to be Camp Hazard at 5:00 p.m. All Jeff and I could see was a hairy rock slide area with a seventy-foot glacial wall hanging overhead — a nice place to camp. Jim Mitchell began clearing a two-foot by eight-foot bedding area and stacked up stone slabs on the perimeter to form a grotto — like a little temple. Maybe he knew something we didn't, so we built our little grotto and put up a prayer wheel just to be safe.

Then we had some fun shooting dinner preparations. By adding a little water to what looked like an air-sickness bag

Continued on Page 1326

SUPER-8 SYNC SOUND PROJECTORS Continued from Page 1277


shown in a normally-lit office, plant, or exhibit. They are widely used by salesmen to make a specific point that is best made by a short single-concept film. They are much less expensive and more portable than color videotape recorders/monitors that are also widely used to accomplish the same thing.

A large fraction of all Super-8 release prints made are presented in the continuous-loop format. In the past such films were produced in 16mm and reduction-printed for Super-8 release. Today many Super-8 cartridge-loaded films are produced on Super-8 original stock, with a cost saving of between 50 to 70% on the stock cost, and a saving of 80% on the production and post-production equipment costs, when compared to 16mm production.

The three most popular types of continuous loop projector are the Technicolor, Fairchild, and Videotronic. All three now use magnetic sound tracks. Because there is no interchangeability of cartridges between different brand projectors, producers whose clients already have such equipment must be supplied with the Technicolor and Fairchild cartridge projectors, but we recommend that a new installation be equipped with the remarkable MPO Videotronic Compact Super-8 projector.

We have found the Videotronic to be quieter, with better sound and a brighter, larger picture (the 21V/150W bulb is the strongest used in any Super-8 projector), and in a lighter and smaller package than the Technicolor and Fairchild units. With an auxiliary lens, the Videotronic can also be used for front-screen projections.

The Bolex SM80 is one of a fine line of Super-8 sound recording projectors incorporating an inching knob, still-frame, sound-on-sound recording, manual and automatic gain control.

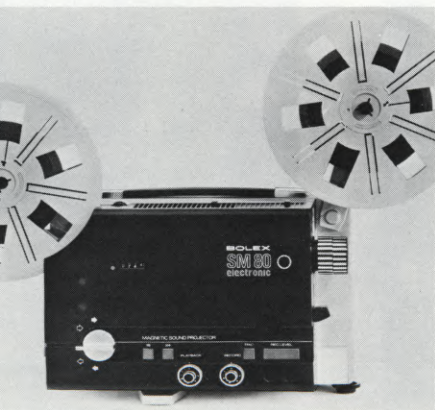

ELMO SC-8T REAR SCREEN PROJECTOR

Although this is not a continuous-loop projector, it has many of the same applications. The Elmo SC-8T has basically the same mechanical and electrical components as the Elmo ST1200, but squeezed into a portable case with a large rear screen. It accepts film on reels (400 ft.), and can project them both rear-screen, and front-screen, with an auxiliary lens.

XENON ARC AND METAL ARC SUPER 8 PROJECTORS

A Xenon-arc conversion of the Heurtier ST42 is being offered by Valley Projection of Burbank, CA. The lamp is an ozone-free 500-watt Osram Xenon. 1500-hour lamp life. Another firm doing Xenon arc conversions of Super-8 projectors is the Optical Radiation Corporation.

We expect that General Electric or Sylvania will soon offer a version of the Marc (GE) or Colorarc (Sylvania) metal-arc lamps and power supplies suitable for replacing the standard Super-8 quartz-halogen lamp. Most Super-8 projectors now use the common EFP lamp, and the blower system can adequately cool the lowest-power metal-arc projector lamps.


This is especially true of the Elmo ST1200, which already uses the 150W EFR bulb. Elmo has introduced a metal-arc projector in Japan, and we hope it will be available soon in the U.S.

SUPER8 SOUND DOUBLEBAND PROJECTOR

The Super8 Sound DoubleBand Projector is a versatile tool for the Super-8 filmmaker's sound studio, dubbing theatre and screening room. It consists of two identical Super-8 sound movie projectors which are mechanically interlocked to permit stopping, restarting, and even rewinding in perfect sync. Its primary use is to permit a double-system screening of an edited workprint and fine-cut sync sound on Super-8 fullcoat magnetic film.

The two projectors can be instantly uncoupled and run separately. This permits easy threading of picture film and sound film. Each projector has an inching knob to facilitate setting of start marks in the gate. Once running in sync, either projector can be in the playback or the record mode, permitting sound transfers from fullcoat magnetic film to magnetic edge stripe, or from stripe to fullcoat.

Each projector is equipped with a once-per-frame (1/F) sync contact switch, permitting sync operation with the Super8 Sound Recorder. With the

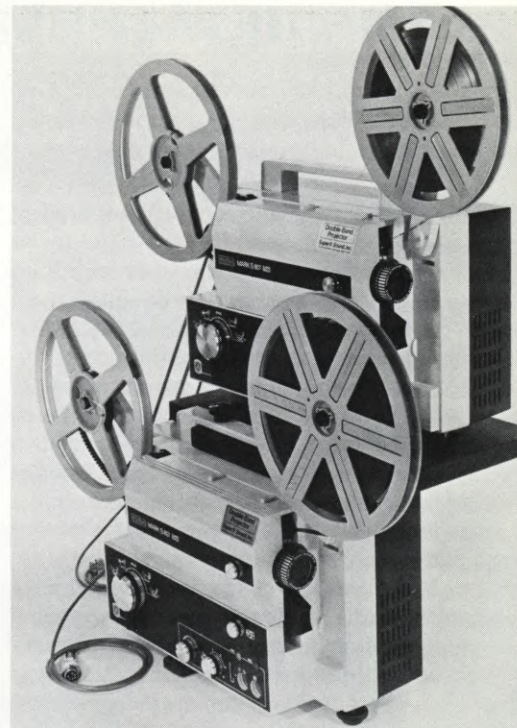

The Super8 Sound DoubleBand Projector, based on the Eumig S807, makes possible in Super-8 the interlocked double-system screenings so necessary for many applications. The two projectors may also be separated for individual use when needed.

DoubleBand Projector and two Super-8 Sound Recorders, a two-track sync sound mix can be made while simultaneously viewing the picture workprint. Of course, wild sounds may be mixed in at the same time. If Super-8 fullcoat is run in both projectors, a three-track blind mixdown can be accomplished.

The DoubleBand Projector can be used to dub new sounds on fullcoat in sync with the picture. Its sync rollback capability allows concentration on just one short segment at a time. A short loop of picture, or original sound, can be run in one projector for the repeated playings needed to achieve a precise replacement of the original material.

For further details on Super-8 projectors, including the cables needed to do double system screenings and strip/fullcoat transfers, send for a copy of the Super8 Sound Catalog (\$1) and Super8 Sound Recorder User's Manual (\$1) to Super8 Sound, Inc., Dept. P, 95 Harvey Street, Cambridge, Mass. 02140. ■

(ABOUT THE AUTHOR: Robin Ogden is a video and film producer at Video Vision, an experimental video production company in Cambridge, Mass. He has experimented with the Kodak Videoplayer and is a consultant at Super8 Sound, where he is setting up an inexpensive film/video transfer service using the Videoplayer.)

THE DEVELOPMENT OF PROFESSIONAL SUPER-8

Super-8 originated as an improved format for home movies, but the professional world is now beating a path to this "better mousetrap"

By RODGER J. ROSS

Fifty years ago a new generation of filmmakers was learning how to make use of 16mm film for what was then termed non-theatrical production. That format was introduced in 1923, when the Eastman Kodak Company began to manufacture 16mm film on a safety acetate base that could be processed with a reversal method to give positive picture images on the original film exposed in the camera. Intended from the first to meet the needs of amateur movie makers, it was soon found that 16mm offered many new — and highly profitable — opportunities for utilizing film as an audio-visual medium in situations where 35mm was either too cumbersome or too expensive. The professional 35mm sector of the motion picture industry put the stamp "sub-standard" on 16mm, but this only served to spur enthusiasts to demonstrate the advantages of the new format, and as manufacturers improved film materials and equipment, and better film handling methods were adopted, 16mm soon acquired professional status in its own right.

Today there is a new contender for professional status: Super-8. A film 8mm in width had been introduced in 1932, to still further reduce the cost of amateur movie-making. That new format was made available simply by slitting 16mm film in half. By the early 1960's demands for improvements in 8mm picture and sound quality gave rise to numerous proposals for a modification of the format. At the technical conference of the Society of Motion Picture and Television Engineers in Los

Angeles in April 1964, Eastman Kodak proposed that the perforations should be reduced in size and placed nearer the edge of the film, giving fifty percent more space for the picture frames, and allowing placement of the sound track on the edge of the film opposite the perforations.

The proposed format was enthusiastically received. Within 12 months, equipment to handle the new 8mm film was being marketed and by the end of 1965 SMPTE engineering committees had under consideration no less than 16 standard proposals. The term "Super-8" was adopted to distinguish the new format from the older "regular-8." Within two years, almost every camera manufacturer in the world had discontinued the building of regular-8 cameras.

It was anticipated that an enormous mass market would open up for low cost Super-8 prints, mainly for educational and home use. However, a significant limiting factor in the universal acceptance of films for commercial and educational purposes was the inconvenience of traditional projection equipment. To remedy this situation many new designs for Super-8 projectors were developed, featuring automatic threading and cartridge loading. Manufacturers here and abroad rushed into the design and production of competing incompatible cartridge projection systems. This lack of concern for interchangeability no doubt bewildered many prospective Super-8 film users. Visionaries of the 1960's predicted that department


stores would sell as many Super-8 films as record albums, and our local libraries would circulate vast numbers of "paperback films", but disregard of the user's needs choked the full development of Super-8 as a communications medium.

In contrast to the cartridge projector situation, a consensus was reached quickly on the main features of Super-8 camera design.

The daylight-loading camera cartridge was accepted as the most convenient method for handling film. The camera should have an automatic exposure control system, eliminating laborious calculations with an exposure meter. The drop-in film cartridge should have notches in the leading edge to automatically set the exposure-control mechanism for the speed of the film in the cartridge. A large, bright, upright viewfinder display should be provided with an easily visible indicating needle showing f/stop at which the control system sets the lens. The camera should be fitted with a motor-driven zoom lens. Dry cell batteries in an internal compartment should be utilized to supply power for the camera motor and zoom lens. The camera should be designed for hand-holding, and it should be as light, small, and fool-proof as possible.

Many variations on these basic design features, in a price range from about \$200 to \$1200, have emerged in the market place, as amateur movie-makers, and later on, professional film producers began to explore the possibilities that Super-8 offers. Some

The photograph below shows various Super-8 picture and sound stocks, as compared to their 16mm counterparts. Shown from left to right are: Super-8 picture film; Super-8 leader, with magnetic edge stripe area; Super-8 "fullcoat" magnetic film; 16mm double-perforated picture film, used in silent or double-system filming; and 16mm fullcoat magnetic film, used to record the sound in double-system filming.

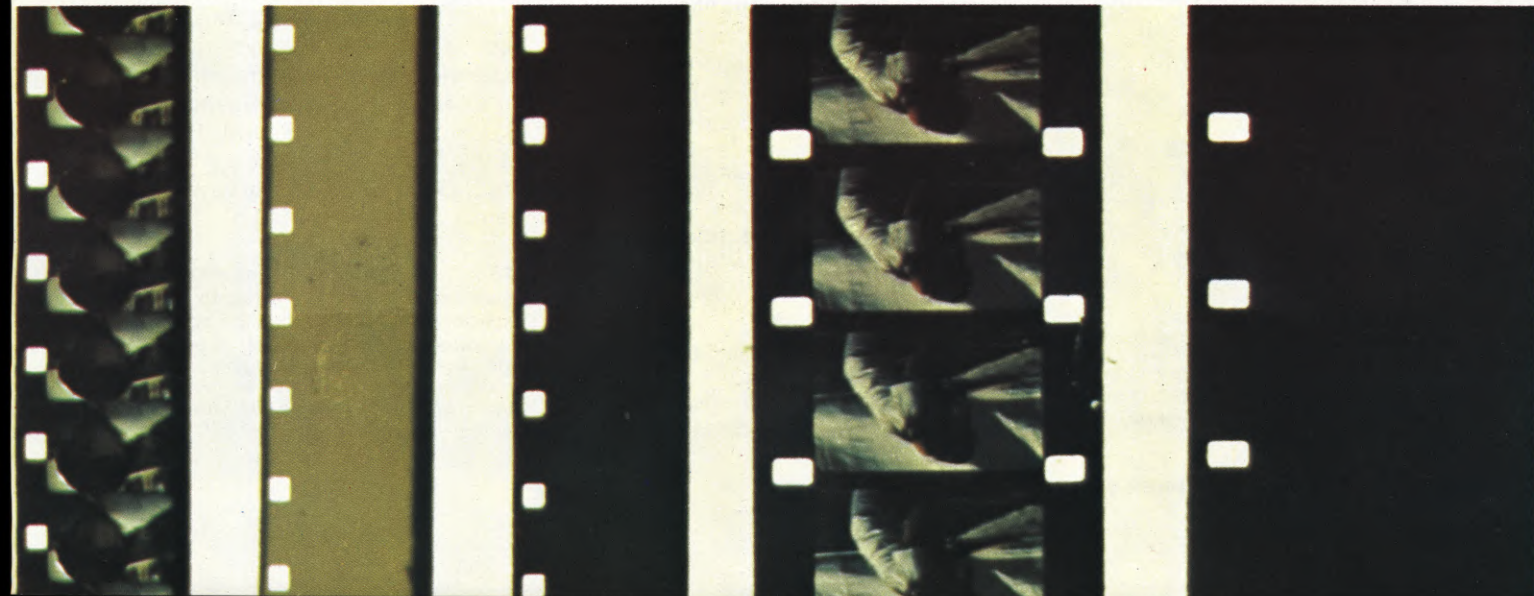


cameras can be run backwards, enabling effects such as lap dissolves to be incorporated while the original film is being exposed. Many offer a choice of filming speeds, from 80 frames/sec. down to still-frame exposures. One significant improvement over regular-8 is what might be termed "in-camera editing." Super-8 cameras have an instant stop-start action of the shutter, so that no frames are overexposed at the beginning or end of a shot. The join-up between one scene and the next looks like a physical splice.

At first, Super-8 cameras did not have sound recording capability, mainly because sound was not a major consideration for amateur movie-makers. Those who insisted on the need for sound with the pictures could have a magnetic strip applied to the edge of the processed camera films, and then a voice-over recording could be made using a recording projector. In 1969, Bell & Howell introduced a double-system sync camera to the market, a separate tape recorder being used for the sound. With this arrangement, pulses generated in the camera were carried by a cable to the tape recorder and laid down as a separate track on the tape. These pulses were then utilized in projection to synchronize the playback of the tape with the picture projector. There was no capability for editing; even simple rearrangement of sync shots was essentially impossible.

In 1972, the documentary filmmaker Richard Leacock announced the development of the first complete professional Super-8 system. With the assistance of a \$300,000 grant from the Massachusetts Institute of Technology, Professor Leacock and his associates modified consumer market cameras, recorders, and projectors to provide professional capabilities. The camera was blimped to reduce operating noise and crystal-controlled, eliminating the cable connection to the cassette tape recorder, which recorded sync pulses from a built-in crystal generator. A fullcoat magnetic film recorder was built with a capability for transferring (resolving) sync sound from the location cassette. A 4-plate motorized horizontal editing table was constructed for editing of picture film and magnetic film. A projector was modified to incorporate a 5-bladed shutter and AC synchronism, which permitted synchronous transfers of Super-8 film to a color video camera.

Eastman Kodak announced an AC synchronous telecine version of their M100A projector the same year, and in the spring of 1973, Robert O. Doyle, a research fellow at Harvard University, developed a portable fullcoat mag-

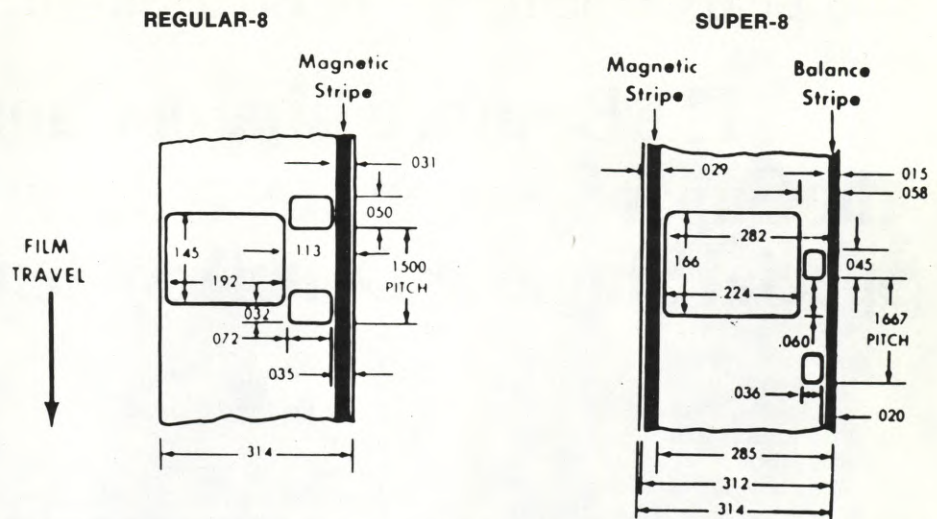

A comparison of the old "regular-8" format and the present Super-8 format, introduced by Eastman Kodak in 1964. Note that the Super-8 format has a much larger picture area, smaller sprocket holes, placement of the magnetic edge stripe opposite the sprocket holes, and a "balance stripe" to equalize the film plane in both the filming and projection to insure equal focus across the width of the film. Overall film widths of both formats are exactly the same: 8 millimeters.

netic film recorder compatible with the Bell & Howell double-system and the MIT/Leacock system, including crystal sync. Doyle's new firm, Super8 Sound of Cambridge, Mass., also announced inexpensive double-system editing equipment based on conventional mechanical synchronizers, rewinds, viewer, and magnetic head. Double-system screenings were achieved by installing a one-contact-per-frame sync switch in the projector.

Single-system sound came to Super-8 with the announcement in the fall of 1973 by Eastman Kodak that camera films with a magnetic stripe would be made available in 50-ft. cartridges at a cost between \$5 and \$6. Soon a number of single-system Super-8 cameras appeared on the market, the most notable of which were the Kodak Supermatic 200 with 24 fps operation and 10 minute, 200-foot film loads, and the Beaulieu 5008S, which has a 6-80mm zoom lens, an f/1.2 (T/1.4) aperture, and high-fidelity sound performance.

The scope of Super-8 utilizations has been extended still further with the introduction by Eastman Kodak of their film video player, VP-1. This small, compact, automatic device, at a cost less than \$1400, gives a video output from Super-8 film that can be displayed on television picture monitors and receivers. The quality of the television pictures from the videoplayer compares favorably with those obtained through the use of much more complicated and costly equipment.

Original filming with Super-8 cameras has the disadvantage that it is somewhat difficult to make prints, and

some losses in picture quality cannot be avoided in the printing process. Filmmakers associated with television broadcasting have discovered that there are many advantages in transferring the original Super-8 films to videotape. From that point on, various promising avenues of exploitation open up. For example, the film sequences for a program can be edited into A & B rolls and, during the transfer to videotape, access can be gained to the full range of electronic special effects that a television studio control room offers.

This method of program assembly has the advantage that once the transfers to videotape have been made, the Super-8 originals can be retained in safe storage, while distribution of the program can be effected with any of the popular videotape formats.

At the SMPTE technical conference in Toronto in November, 1974, the chairman of the Super-8 study group of the Canadian Broadcasting Corporation, Karl Kruger, described his group's research with Super-8 as an original medium for television production. Equipment studied included the MIT/Leacock system, the Super8 Sound Recorder, a custom-engineered fullcoat recorder that was selsyn-interlocked with a Kodak TVM100A, and a rear-projection system that gave excellent television pictures from Super-8 film. This was accomplished by setting up a studio camera facing a small translucent screen in a light box. The light beam from the Super-8 projector was directed by an arrangement of mirrors inside the box to the rear side of the

Continued on Page 1321

The Ideal Combination for Professional Super-8 Filmmakers:

The Beaulieu Line of Cameras—Plus the Super 8 Sound™ Recorder and F&B/Ceco's Special Single or Double System Modifications.

For the last 10 years, Super-8 film has been "silent". Without sound, your Super-8 movies were "incomplete".

Today, there is "Ektasound" film, a revolutionary film which provides the means to record sound (directly on the film) as you're filming. You, therefore, can shoot "complete" movies.

With the new Beaulieu movie camera, you will go even further in Super-8. The "5008S" benefits from the advanced technology provided by Beaulieu: an image with a professional touch, and now sound with a high quality level.

Professional Sound Quality

Pop in a new Super-8 sound ("Ektasound") film cartridge. Focus. Then, plug in the mike. That's all the preparation you need. With the Beaulieu "5008S", you're now ready to start filming professional quality Super-8 single system sound movies.

An amplifier is built into the camera which records the sound directly onto the magnetic stripe of your sound film. The camera records high fidelity sound, both in treble as well as bass (frequency response: 50-12,000 Hz \pm 1.5 dB; distortion: less than 0.75%; signal-to-noise ratio: 57 dB; wow and flutter, attenuated peak: less than 0.4%).

The "5008S" modulates the single system sound recording automatically. However, there is also a "manual" setting so that you can modulate the sound as you are filming (by using the VU meter).

"XL" (Existing Light) Filming Capability

The "5008S" has "XL" (Existing Light) filming capability which is provided by: a *super-fast* lens (f1.2, 6-80mm Angenieux zoom), a longer exposure time for the image (1/40 second), and a through-the-lens metering system that sends 100% of the available light to the film.

Since many of your sound movies will be filmed indoors, this feature will enable you to shoot films in the available light of your scene (whether that "light" is bright or not).

From the "Widest" Wide Angle Shot . . . To the "Closest" Close-Up

For the lens, Beaulieu turned to the professional and technical "know how" of Angenieux (which supplies NASA for all their space missions).

Angenieux succeeded in creating a new zoom lens that covers all the focal lengths from 6-80mm (a 13.3 to 1 zoom ratio).

Imagine such a lens in 35mm still photography. It would go from a 35mm wide angle to a 500mm tele.

In addition, the lens opens to f1.2 (an *unprecedented feature* on a zoom lens with such a wide focal length range).

New Dolly Shot Style

The power zoom of the Beaulieu "5008S" is continuously variable. You can travel the full focal length range in 4 seconds, or 12 seconds (*or any speed in between*).

Macrocinematography — Without Touching the Subject

To film macrocinematography with the "5008S", just zoom to 80mm and

focus. At the minimum focusing distance of 2 feet, 8 inches, you get all the light available since the lens doesn't actually touch the subject. For example, at this distance, a postage stamp (1½" x 1-1/5" in size) completely fills the viewfinder (and consequently, the screen—when projecting).

Forget the Exposure

With the "5008S", you can concentrate totally on framing and sound recording. The diaphragm operates automatically and stops instantly at the right aperture. (This feature has "Manual Override".)

Lens Interchangeability

The "5008S" is the only single system sound camera with an interchangeable lens. It accepts 35mm still photography lenses (by means of an adapter), as well as all 16mm "C" mount lenses.

The choice is yours. You can interchange an unlimited amount of different lenses in order to create a certain "feeling" or effect in your films.

For more information on our complete professional Super-8 systems please write or call.



The Beaulieu "5008S"
Sound Movie Camera

We want you to come back.

F&B CECO
THE RENTAL SPECIALISTS

SALES - SOS DIVISION

315 West 43 St., New York, N.Y. 10036 / (212) 586-1420
7051 Santa Monica Blvd., Hollywood, Calif. 90038 / (213) 466-9361
Phone Toll Free (800) 223-5829. In New York State Phone Collect (212) 586-1420



The MPL Calling Card

When MPL handles film, service comes right along with quality. Because MPL tailors its master craftsmanship to your specific film needs. Like the producer who walked in with his uncut original and soundtrack in the morning and walked out with his prints that night. MPL service is fast, accurate, personal. At MPL we specialize in custom care . . . for your film . . . and for you. So come see us today!

MPL's Comprehensive Services Include:

PROCESSING: B & W Reversal, B & W Neg/Pos, Color ECO and EF, Color Neg, Interneg/Pos, Reg. & Super 8 also

PRINTING: B & W Interneg/Pos, B & W Reversal, Color Interneg/Pos, Kodachrome Prints, Ektachrome Prints, Printing Masters, Reg. & Super 8 also

SOUND: Original Recording, Rerecording, Mixing, Interlock Screenings, Sound Optical Transfers, Music Libraries

PRODUCTION SERVICES: Editorial, Conforming A/B Rolls, Titling, Film Treatments, Film Lubrication, Scripting

SPECIAL SERVICES: Color or B & W Videotape to Film Transfers, 35 mm to 16 mm Optical Reductions, 16 mm Optical with Effects, 16 mm to 8 mm Reductions, Film Treatments

CINE-CRAFT LABORATORIES, 8764 Beverly Boulevard,
West Hollywood, California 90048

MOTION PICTURE LABORATORIES, INC., Piedmont Division,
2517 South Boulevard, Charlotte, North Carolina 28203



**MOTION PICTURE
LABORATORIES, INC.**

781 South Main Street
Memphis, Tenn. 38106
(901) 774-4944

TEACHING FILMMAKING WITH SUPER-8 AT MIT

How the modification of appropriate existing equipment, funded by a \$300,000 grant, led to the development of a complete Super-8 filming methodology modeled closely on existing 16mm crystal-sync systems

By JOHN TERRY

The Massachusetts Institute of Technology began a limited film production course in 1969 under the supervision of Ed Pincus. Richard Leacock became the director in 1970, and I joined the program shortly thereafter. From the beginning the basic philosophy of film teaching at MIT has been to approach each student as a potential filmmaker rather than a potential technician. Film-making was approached not solely from a technical point of view, but from one that encouraged the student to consider his filmmaking experience on many levels — personal, political, sociological, etc. The relationship between ideas and their execution in film form has been our main point of discussion with students. The primary intent of the film curriculum is to introduce students from many disciplines to the techniques of making film, in the expectation that they will use this skill as a tool for research and exploration within their own fields. The way in which we have attempted to implement this philosophy in the past six years has been dependent on the level of technology with which we have been able to equip ourselves and the problems and successes we encountered.

We began production courses with 16mm non-sync Bolex and Scoopic cameras and Sony 1/4" reel-to-reel tape recorders. Students learned double-system editing on Moviolas and synchronizer/viewer/squawk box combinations. From the beginning we felt the necessity for teaching double-system techniques as the primary

Al Mecklenburg and Charles Meyer thread double-system interlock projector for final screening of student films at U.F.S.C. Summer Institute. Also pictured are John Terry and Richard Leacock.

grammar of filmmaking. Our limited facilities meant virtually no synchronous sound filming.

But the importance of sync cannot be overstressed. Significant work can be done non-synchronously, but a student must have the possibility of sync sound if he is to be given access to the full range of possibilities of film. Gradually, we developed a modest 16mm sync production facility. Introductory students continued to work with 16mm double-system non-sync, and advanced students were "free" to use the 16mm sync equipment. The limitations were largely of an economic nature. Often neither MIT nor the students could afford the budget for a serious sync film. Because of the high cost of 16mm sync cameras, we could own only a few of them; student demand was great and consequently students could spend only a limited amount of time in the field with the equipment. We thought that the existence of a Super-8 sync system might solve some of these problems.

Over the years, we have found that students who filmed on-going realities have had more expeditious learning experiences than those who have filmed directed performances. We have observed much less wasted time and effort by introductory and intermediate students filming an on-going interaction, event, or performance than by those who have also been responsible for the arrival, direction, and performance of actors and crews. Thus, the further reduction of the baggage of filmmaking by the development of a lightweight, highly portable and technologically simple Super-8 sync system seemed a most desirable goal.

In early 1971 MIT granted Richard Leacock \$300,000 to develop a complete Super-8 production system, modeled closely on existing 16mm crystal-sync systems.

The design philosophy we sought to utilize was the modification of appropriate existing Super-8 products, whenever possible, rather than to design totally new equipment. Also, we attempted to find electronic solutions rather than mechanical solutions because we believed this would be a cheaper approach. We hoped our new designs would have many advantages for teaching film over existing techniques.

By the summer of 1971, we had modified two prototype Nizo S-56 cameras for cableless crystal sync. One was blimped and one was un-blimped.

In the prototype blimped camera all the crystal control electronics were fitted inside the camera body. Extending through the blimp were the automatic light meter control (which also allowed for manual setting), as well as the control which positioned an 85 (type A) filter in front of the film plane.

MIT's first sync prototype cassette recorder was a modified Sony TC 124. The crystal synctone electronics were mounted in a "black box" attached to the side of the recorder. Since the TC 124 was a stereo recorder, a 48 cps sync tone was fed into the line input of one channel and the microphone signal went directly to the microphone input of the other channel. A slating device (visible light, and a "beep" tone on the audio track) was considered to be a design requirement and was incorporated in even the earliest prototypes. Very quickly in our research it became apparent that high-quality cassette sound could only be achieved by using better microphones than those supplied with the recorders. We chose the Sony ECM 21 electret condenser microphone.

By incorporating a pre-amp around the microphone itself, one was able to control volume with the fingers of the hand holding the microphone. We also included in the black pre-amp box a switchable low frequency cut-off filter, which was very useful in eliminating wind noise and in improving the clarity of speech.

For editing, we had two jury-rigged motorized double-gang synchronizers with viewers. Thus equipped, we went off to Hampshire College to teach Super-8 sync-sound filmmaking for the first time. The occasion was the first U.F.S.C. Summer Institute, a three-week intensive gathering of students with teachers, filmmakers, photographers, film critics and historians of all persuasions.

Out of this somewhat primitive equipment came some remarkable film efforts. MIT's research and development of Super-8 sync continued, spurred on by the success of our intensive course. Since the summer of 1971, we have gradually equipped ourselves at MIT with more and more




Super-8 production equipment so that during the past year at MIT, both introductory and advanced production courses were conducted in Super-8 sync, and 16mm was used only for "special projects" (those projects with outside funding when the client clearly wanted 16mm production). We have also taught four more summer workshops, and from this experience a very interesting observation has emerged. There seems to be very little difference between student progress in the three-week intensive workshop and a regular one-semester course of work at MIT. Students seem to learn as much in three weeks (with classes every day, often editing all night) and emerge with about the same "level" of finished film as they do in a course meeting once or twice a week over four months of the academic semester. Though we have never performed similar comparisons in 16mm production (and we never could, due to the high cost of 16mm production), this would be an interesting experiment.

Teaching with both 16mm and Super-8 for five years has also raised several other interesting issues. Recently, another film teacher asked me directly, "Is teaching Super-8 really different from teaching 16mm sync, or is it pretty much the same?" The best answer I could come up with is, "Yes."

There are several facts about the nature of Super-8 sync that make intensive teaching situations a viable educational possibility. In our summer workshop courses, there are some students who have no comprehension of ASA, exposure, focal lengths, etc. After explaining a few switches, dials, and an initial discussion of automatic light meters (concentrating on the necessity of using them only to get a proper manual setting), students go out in pairs and shoot a test roll of sync! The next day, they resolve-transfer their sound and the problems of attaining good sound are discussed. The third day film is back from the laboratory; rushes are screened silently and camera work is critiqued. Students then proceed to the editing tables, where they sync up the test rolls. This seeming assembly-line-like procedure allows the students to experience the entire process of double-system filmmaking before actually beginning their film projects. This confronts directly the problems we encounter with students who arrive with ideas for cinematic projects that are not feasible because of the time span of the course and their level of technical expertise.

From the standpoint of cost, perhaps

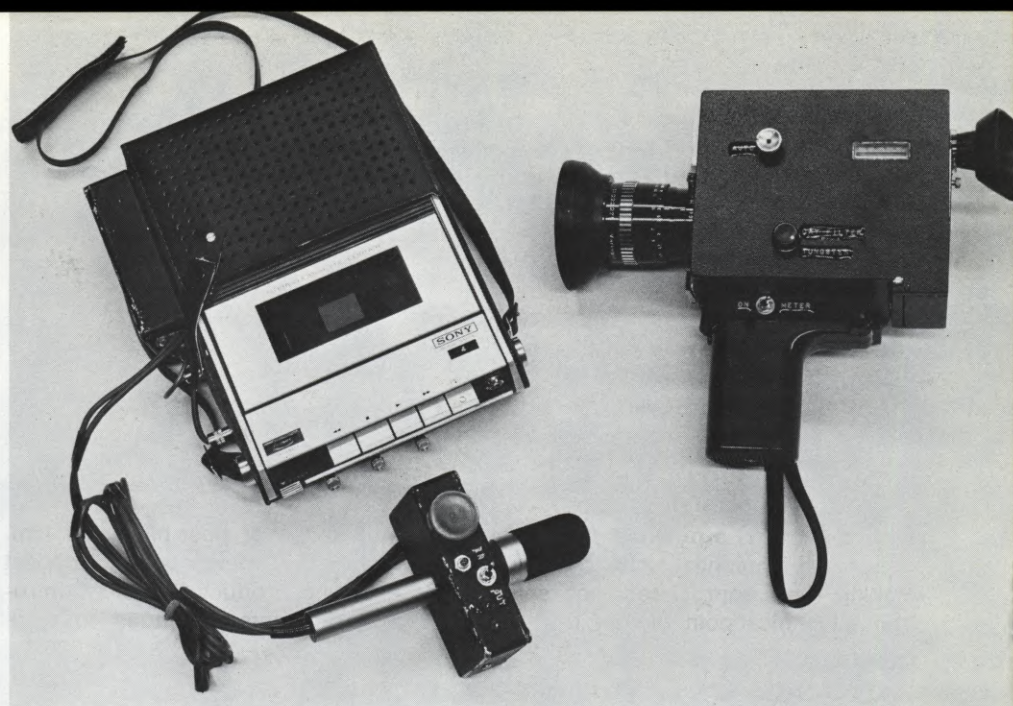

In the MIT prototype blimped camera all the crystal-control electronics are fitted inside the camera body. Extending through the blimp are the automatic light control meter (which also allows for manual setting), as well as the control which positions an 85 (type A) filter in position in front of the film plane. The Sony TC 124 cassette recorder, unlike the final Hamton production model, has not yet had the crystal-sync generator electronics moved inside the recorder body. This lack of internal wiring resulted in some degree of unreliability, due to plugs coming unplugged and the loss of sync or radio signal.

the most important difference between 16mm and Super-8, many questions arise. While the debate rages as to exactly how much cheaper Super-8 is than 16mm, let us accept, for the purpose of discussion, an estimate of film stock, mag film, and other editing supplies as being about one-half of the 16mm price per minute. Let us also accept the cost of Super-8 cameras and recorders, editing equipment, etc. as being about one-fifth that of 16mm equipment. Stock and equipment are separate issues, and we should discuss separately the implications of the cheapness of each.

Because of the lower capital value of the equipment, one can simply own more of it. At MIT we have seven Super-8 camera-recorder pairs and three 16mm camera-recorder pairs. This means we handle more students, who can film in the field for longer projects, can tackle projects further away from the equipment checkout room, and can be involved in higher "risk" situations. Students can film in areas of the city where it would not be wise for inexperienced filmmakers to appear with a 16mm sync rig that looks as if it's worth \$10,000 (and indeed is). Because of the "lower profile," innocuous appearance of some of our Super-8 rigs, we never have had any of them stolen from students in the act of filming, which has sometimes occurred with 16mm equipment.

But the greatest virtue of cheaper

equipment is the possibility of giving more students access to the equipment. Having more students necessarily means we will see a greater variety of interests in the people who are coming to learn. If an appropriate atmosphere for the exchange of ideas and viewpoints can be maintained, an opportunity for a superb educational experience will exist. Having increasing numbers of students in film is also a fact of the times. It is important to remember Laslo Moholy-Nagy's statement that "the illiterates of the future will be ignorant of both the pen and the camera."

Cheaper raw stock and mag film are also a plus, but not as clear a benefit as they might at first appear to be. One's immediate instinct is to believe that the more one can shoot, the greater the learning experience, and the better cameraperson one becomes. Generally, this seems to be true. However, in our summer workshop experiences I have often found that the students who shoot the most often do so because they have the least clear ideas of what it is they're after and therefore they go for a kind of "buckshot" approach and try to shoot everything. The same students often have trouble editing their films because they find that in shooting everything, they concentrated on nothing.

The most important aspect of camera technique that filmmaking

Continued on Page 1299

THE END OF HALF YOUR LIGHTING PROBLEMS.

If you had to pick one aspect of filmmaking that has necessitated the development of the greatest variety of equipment, you'd have to pick lighting. Every scene, every shot, every studio, every location, every product, virtually every face requires its own individual lighting solution. You'll be glad to know that at Camera Mart we stock every one of those solutions. From the biggest Maxi-Brute array to the most portable

sun gun. For rent of sale. Lights that work from any source, 220-volt AC to 30-volt battery. Colortrans, Moles, Lowels and practically every other name brand. Plus every accessory imaginable: snoots, scrims, silks, reflectors, flags, stands and every other piece of gaffer equipment—right down to tape.



THE END OF THE OTHER HALF.

But as we're so fond of saying, the right equipment is only half the solution. Expertise is the other half. And at Camera Mart, our people don't just sell and rent lighting equipment. They are, to a man and Ms., *bona fide* lighting consultants, capable, for instance, of designing a lighting package for you that will do more than you expected for less than you expected to spend. We can show you

how to get more candlepower from less electrical power (particularly important on location). Or how to stow 5,000 watts in an attache case that'll fit nicely under an airline seat. We'll even suggest how many spares to take along. In short, when it comes to lighting, we're a real bunch of know-it-alls. And since we also *have* it all, why bother going elsewhere?

CAMERA MART 456 West 55 Street New York, N.Y. 10019
You make sense. Tell me more about how Camera Mart can solve both halves of my lighting problems.

NAME _____ TITLE _____
 COMPANY _____
 ADDRESS _____

 CITY _____
 STATE _____ ZIP _____
 © 1974, Camera Mart AC 974



**CAMERA
MART**


THE CAMERA MART, INC.

456 W. 55th St., New York, 10019 (212) 757-6977
SALES SERVICE RENTAL

IF IT'S WORTH SHOOTING, IT'S WORTH SHOOTING WELL.

Canon Scoopic 16M. In the operating room, the factory, or anywhere you want to film, it puts all the features of the world's most popular silent '16' news camera at your fingertips. A versatile f/1.8 12-75mm *macro* zoom that focuses to 3½" and does optical dollies. Speeds from 16 to 64 fps plus single-frame—all auto-exposed. Bright, reflex-viewing finder. Silent, efficient movement (16-100' rolls on a single charge of its built-in nicad). Low profile. Light weight.


And all for under \$2000 complete with charger, case and accessories. There's nothing to match it under \$4000, so why not see your dealer or contact us to find out more.



Canon

Professional Motion Picture Division.

10 Nevada Drive, Lake Success, N.Y. 11040 (516) 488-6700
123 East Paularino Avenue, Costa Mesa, Ca. 92626 (714) 979-6000
3245 American Drive, Mississauga, Ontario, Canada (416) 678-2730.

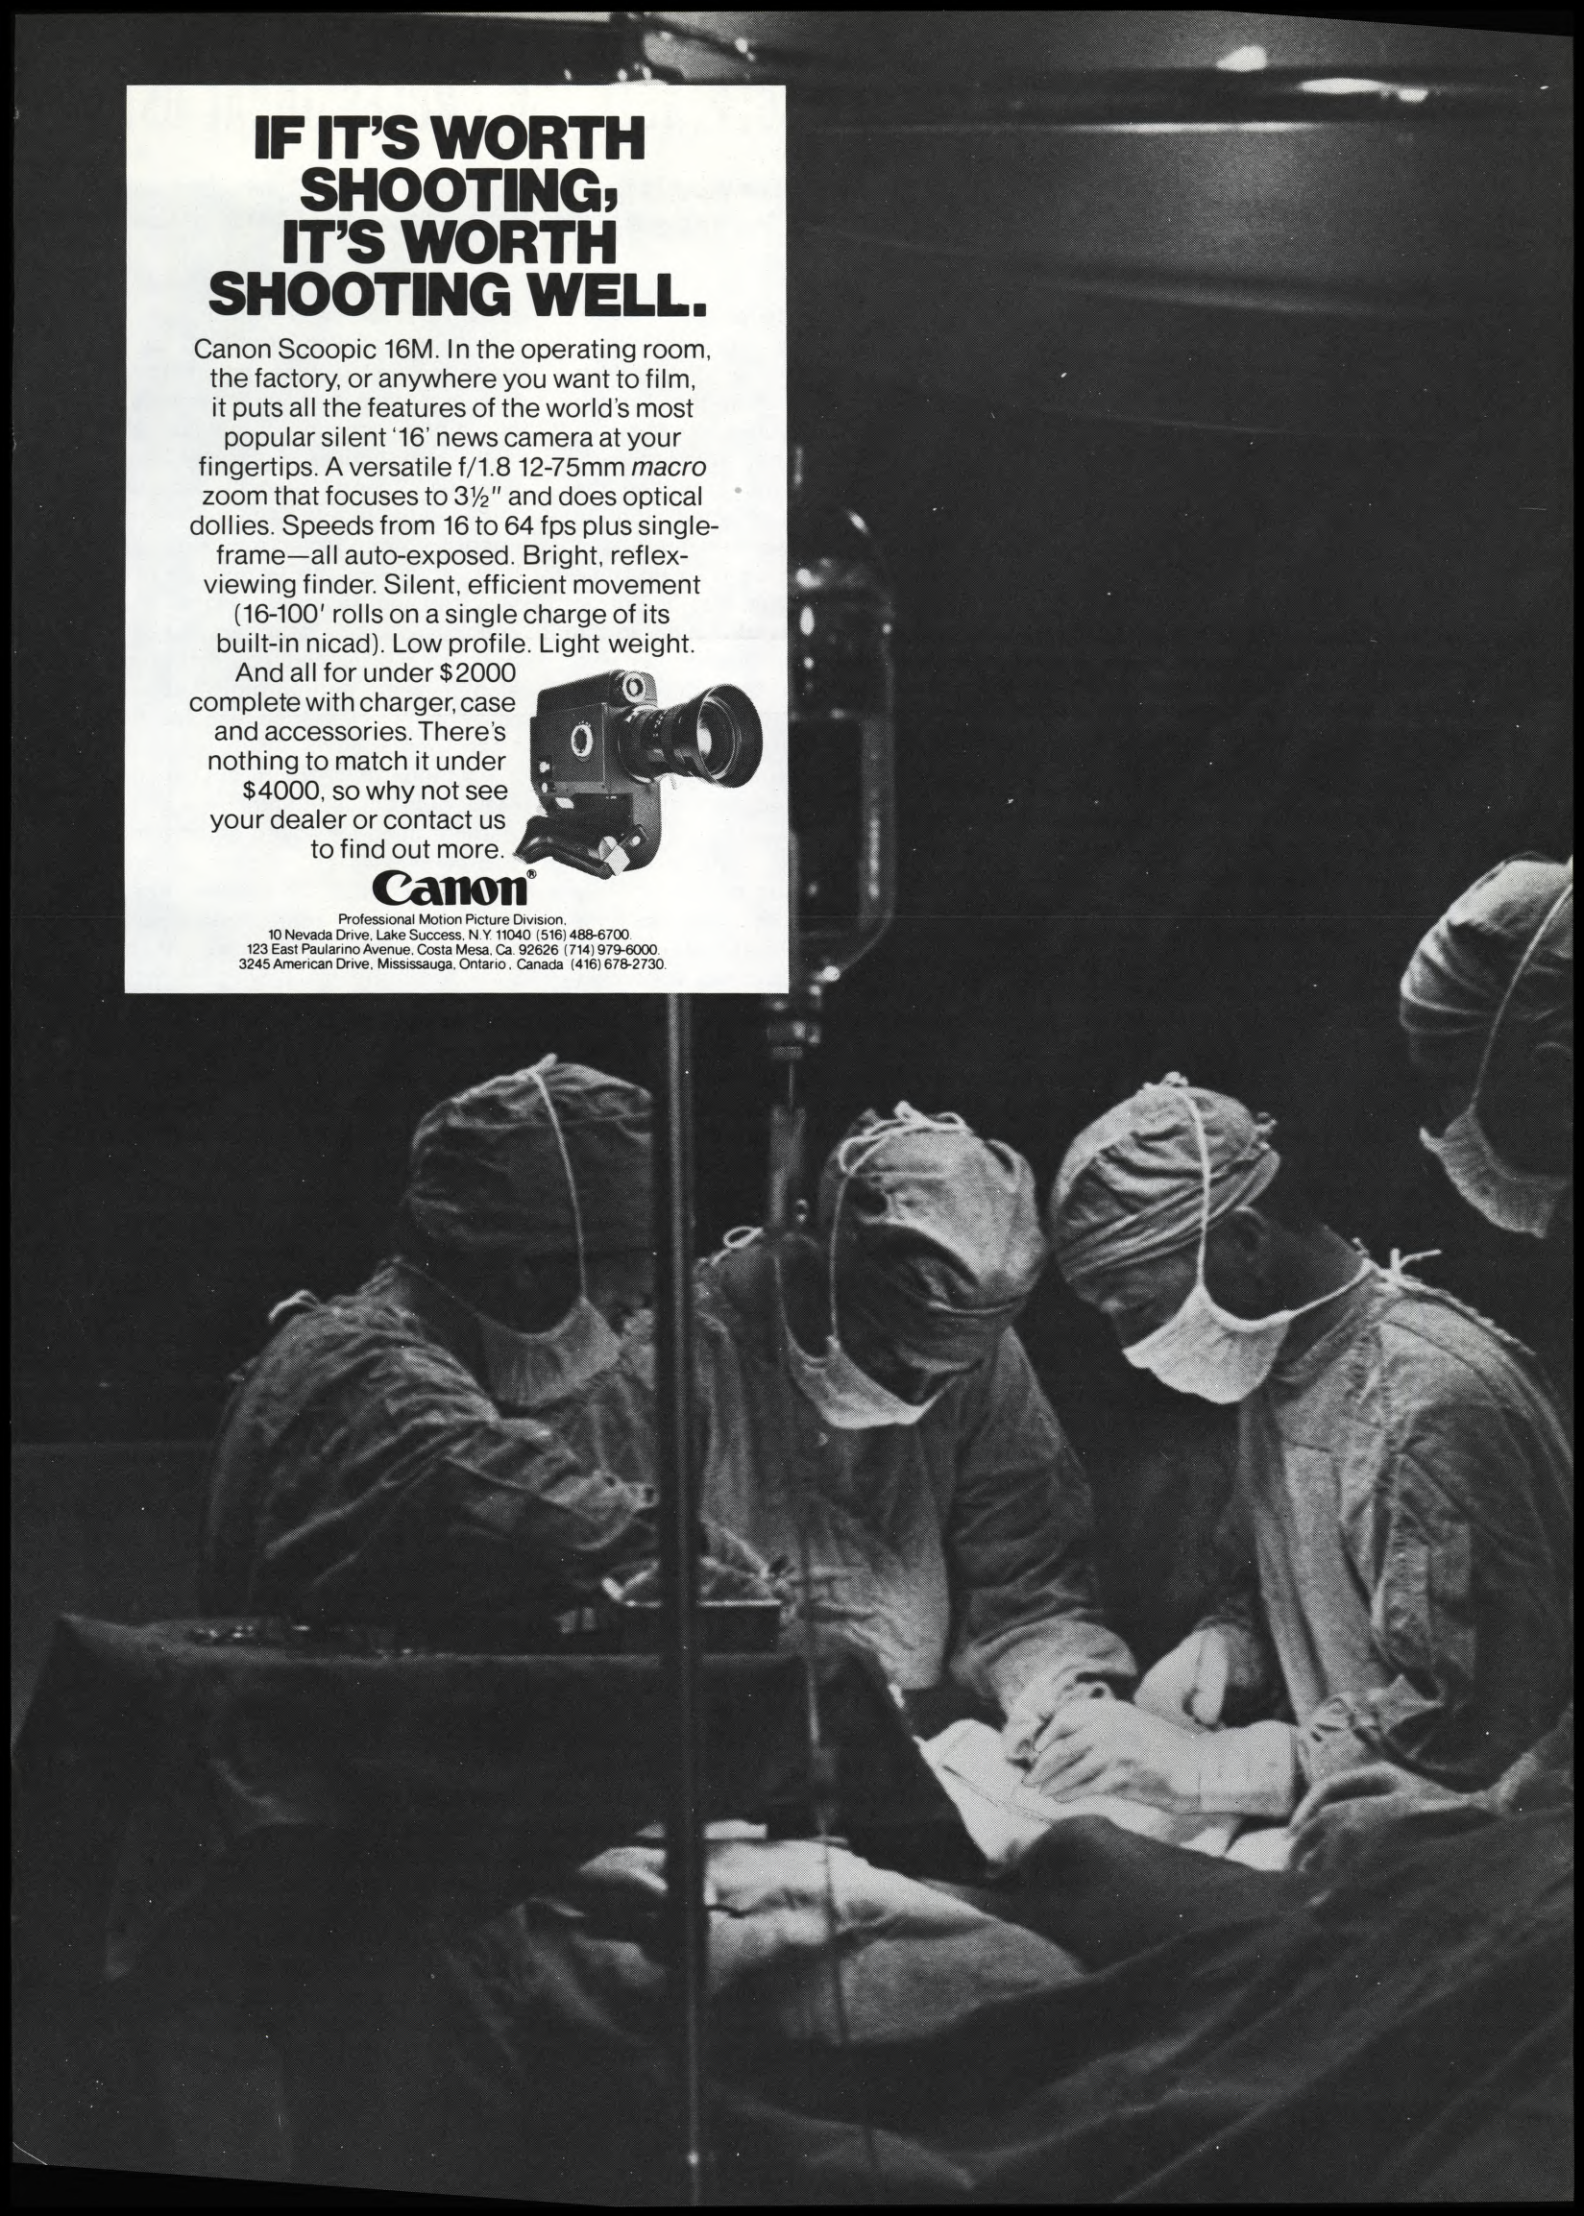

IS THE 18fps "AMATEUR" SPEED ACCEPTABLE FOR PROFESSIONAL USE?

Even though 24 fps is the accepted sound speed in all professional formats, there is a case to be made for standardizing at the 18 fps rate for Super-8

By LENNY LIPTON

All Super-8 sound projectors can operate at either 18 or 24 fps. So can many Super-8 cameras. What does this really mean to you as a filmmaker? What are the reasons for the choice?

People coming to Super-8 from the larger 16mm or 35mm formats will probably advise you that the only speed to use is 24 fps. That's the way it's done in the larger formats. Although most 16mm projectors in service will operate at either 16 or 24 fps, few, if any, are suited for sound projection at 18 fps: the amplifier is usually turned off at the slow speed. And 16mm projectors designed for theatrical projection usually don't operate at the slower speed. Thirty-five mm projectors also rarely operate at what is considered to be the silent speed by professionals.

All in all, it's fair to say that a sound film at 18 fps for the 16mm or 35mm formats is totally incompatible with projection facilities.

How we inherited the two fps standards is an interesting story: Edison and his research associate William Dickson chose 48 fps for their battery-operated camera in 1889. (It's interesting to note that the very first movie camera was battery-operated. People didn't hand-crank cameras until the

rate was lowered to 16 fps.)

While Edison was exclusively interested in peep show or nickelodeon display of his movies, the French Lumière Brothers, Louis and Auguste, had other ideas. They adapted early Edison apparatus and produced the first theatrically projected motion picture images. The Lumières, who were photographic plate manufacturers, decided that the Edison rate of 48 fps was too high to be economical, so they experimented with lower rates, and in 1895 settled on 16 fps. Twenty years later the Gestalt psychologists exhaustively determined this very same value for the phenomenon in their laboratories in Germany.

The Lumières were trying to produce an acceptable illusion of motion while using the least amount of film. So in the silent days of theatrical motion pictures, the standard was a nominal 16 fps. This was an era of hand-cranked cameras — and hand-cranked projectors as well. With an active audience in the theater, and a musical ensemble in the pit, the projectionist was creatively tied and profoundly alive to the dynamics of the moment, cranking the projector faster or slower to suit the dramatic circuit of images,

audience response and music.

With the coming of sound, all that disappeared. (I was going to say forever, but the description reminds me of the great light shows that flourished in the rock houses of the psychedelic late '60s.) Sound forced the decision to raise the fps rate to 24 to get the most out of the unperfected optical tracks of those days. For the technology of the '20s, running 35mm at a higher speed meant less flutter, that gargling sound or poorly reproduced recordings; and it also meant better high-frequency response for clearer speech and more treble for music.


As I look at it, 16mm optical sound really didn't click until the '40s and the wartime need for sound entertainment and training films for the armed forces. Naturally enough, 24 fps was needed for good quality 16mm optical sound; as an important feature, it also provided compatibility with 35mm films optically reduced to 16mm.

In the early '50s, magnetic sound tracks for 35mm prints were developed, notably with four-track stereophonic sound for CinemaScope; but many theaters balked at having to install new sound equipment as well as screens and lenses, so Fox retreated from their original standards and added an optical track to their release prints. That's why you're more likely to hear optical than magnetic sound at your local theater.

Despite the fact that it's really a hell of a lot better sound than optical, 16mm magnetic sound never caught on in a big way in this country. It had two strikes against it from the beginning: magnetic sound prints are more costly than optical prints, and magnetic recordings can't be played back with the optical soundheads installed in hundreds of thousands of 16mm projectors in service.

But now we have Super-8. It's a whole new ballgame, a new era, and an opportunity to develop standards that are not locked into the technology of the past. Films made in Super-8 with magnetic sound meant for Super-8 projection or TV display ought to be shot at 18 fps. In terms of sound quality, there is no reason not to. Why stick to standards based on an obsolete medium for original sound recording developed in an era that used tubes instead of printed circuit chips?

Comparison of cassette and striped film frequency response. Eastman scientists engineered a special tape deck that could accept either cassette tape or prestriped Super-8 film in order to eliminate the deck as a factor. Note superior stripe response, attributable to its higher lined rate (3 or 4 ips), compared with tape (1 7/8 ips).

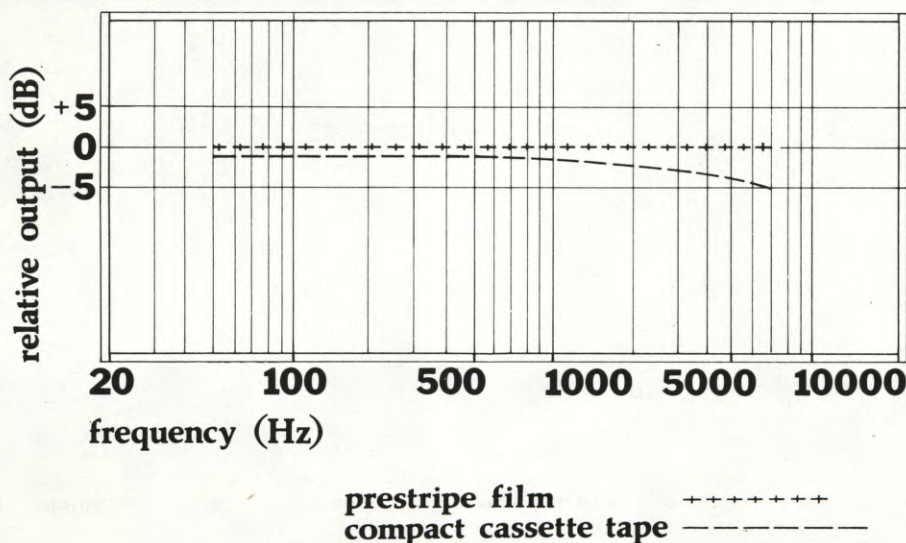

A Super-8 film at 18 fps travels at three inches per second (ips) past the soundhead, and 4 ips at 24 fps. The difference in sound quality with good equipment is hard to hear, although test equipment may show some slight improvement at the higher speed. And for magnetic recording this marginal improvement will become all but meaningless as technology improves in the immediate future.

If you have a reel-to-reel tape recorder, you know it uses quarter-inch tape (6.35mm). The 27 mil Super-8 track is just about the same width as one of the four stereo tracks these machines use. Your recorder probably runs at any of, or all, these speeds: 1 7/8, 3 3/4 and 7 1/2 ips. You can get great results at 3 3/4 with your machine. So can Super-8 at 3 ips.

If you have a quality tape deck, using Philips-designed audio cassettes, you're getting hi-fidelity sound with stereo tracks only 21 mils wide, running at 1-7/8 ips.

If you have listened to a good Super-8 track played back through good speakers at 18 fps, you know the sound is really good; and if you bother to run a test, you'll find you have a hard time telling the difference between 18 and 24 fps. Make the test for music and voice recordings: your ears are the judge.

Now what about picture quality? Won't an image projected at 24 fps look a lot better than one at 18 fps? Won't it have less flicker and be less jerky?

There's a vast amount of research that has been done on the phi phenomenon: Gestalt psychologists were practically obsessed with it because they used it as the experimental basis for their theory of electrical fields moving through the visual center of the brain. While people working in psychology and neurology today think this theory is not correct, the mass of experiments they performed are valid nonetheless. The phi phenomenon requires from 12 to 16 fps for the illusion of motion, the figures varying with the sources I've looked up. Certainly 18 fps is more than enough for this illusion. Try it out. Take shots of the same action at 18 and 24 fps. Do the movies projected at 18 fps look any less smooth? I think you'll agree that they look just as good as those taken at 24 fps.

Now what about the constraint imposed by the persistence of vision, the Critical Fusion Frequency? Simply put, if a light flickers about 50 times a second, or more, you won't see a flicker, but rather a continuous light. This 50 flickers a second is called the

Critical Fusion Frequency, and it varies with the brightness of the light and other factors. Well, for shutters used in projectors designed to work primarily at 24 fps, there usually are 48 flickers or effective frames per second; in most Super-8 projectors, at 18 fps the shutter produces an effective 54 fps. So, all things being equal, you'd expect less flicker at 18 than at 24 fps. Using the same projector at 18 or 24 fps, you'll be experiencing 54 or 72 flashes per second respectively, since the shutter is usually set up to satisfy the Critical Fusion Frequency for the lower speed; you will probably not be able to see (or hear) any difference.


But why the pressure to shoot and project at 24 instead of 18 fps? Elitism, ignorance, snobbism, conservatism; or simply hanging on to standards that once had meaning? Who cares?

Don't be taken in. Think the thing through for yourself. Try the simple comparisons I've suggested. Shooting at 18 fps, look how much money and film you save! Three 50-foot cartridges at 18 fps will equal the running time of four cartridges at 24 fps. Both will run for ten minutes. Both will give fine quality. Only someone planning a blow-up to 16mm or 35mm, or Super-8 optical sound release prints, has to choose the faster speed.

But there's even more: you gain about half a stop shooting at 18 fps. This means that in marginal low-light situations you can take movies at 18 that you couldn't have at 24 fps. Also, all hardware runs more quietly at 18 fps. It's a fact of life: machines' motors and other running parts make less noise running at a slower speed. Not only does this apply to the camera, but your projector will run more quietly too.

I think it's an absolute disgrace that 24 fps is being palmed off as necessary by an industry rapidly expanding to fill the needs of people deeply into Super-8 filmmaking. And a few items of good equipment will operate only at 24 fps. For shame! Moreover, as long as 24 fps is considered to be the professional standard, designers are likely to maximize their equipment specifications for this speed, letting the 18 fps user take second best. If designers want to make superior 18 fps equipment, they can easily enough, since the difference between 3 ips and 4 ips is not very great.

And even if video presentation is planned, there isn't any excuse for this. The Eastman videoplayer will operate at both speeds, so films can be shown closed circuit, broadcast live or transferred to tape, if need be, all at 18 fps, the home moviemaker's humble speed.

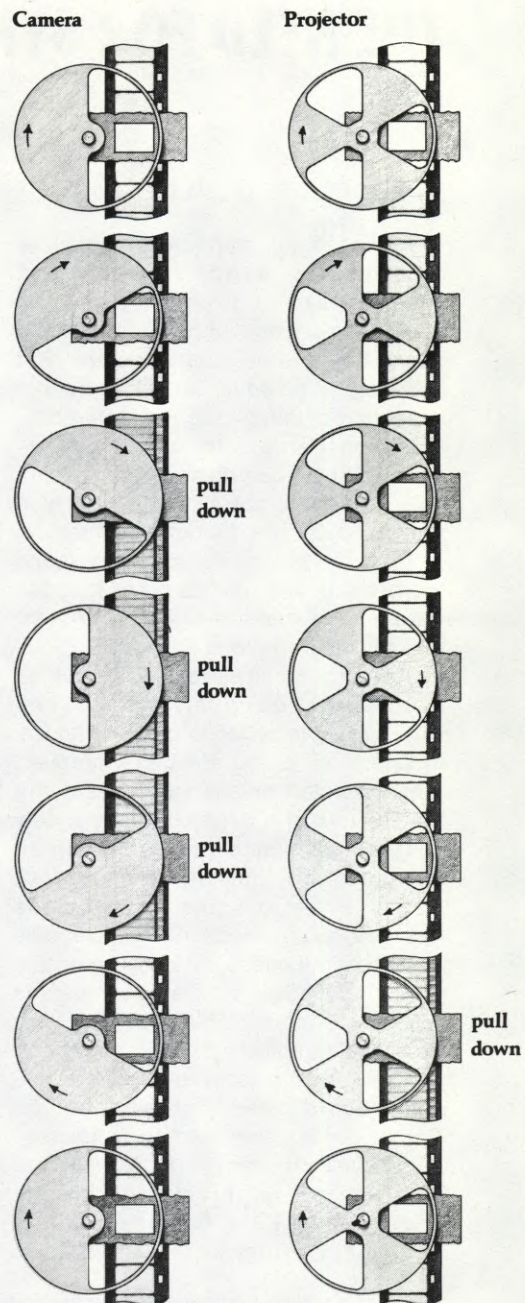

A Camera-projector shutter cycle. The drawing compares the action of the camera and projector shutters and pulldown for one frame of film. While the camera shutter is made of a single blade, the projector shutter in most Super-8 machines is made of three blades. The segment of the projector shutter marked with the arrow prevents projection of the moving film, while the other segments interrupt each frame twice, producing an effective fps rate of 54 at 18 fps, and 72 at 24 fps.

(ABOUT THE AUTHOR: LENNY LIPTON is a well-known filmmaker and author whose current passion is the simplicity of the Kodak Ektasound Super-8 single-system camera. He defends even the lowest-cost cameras as valuable communications tools adequate to many tasks. Here he argues that the more economical 18 fps amateur film speed, originally standardized as the Super-8 silent speed, but now a sound speed on low-cost Ektasound cameras, provides more than just acceptable image and sound quality. His latest publication "Super 8 Book", is now available from Straight Arrow Books.)

THE NEED FOR SYNC SOUND STANDARDS FOR SUPER-8

Taking a lesson from past selfish stupidities, equipment manufacturers must realize, before it's too late, that Super-8 sound can grow and prosper as a universal professional format only through standardization

By ROBERT O. DOYLE

The need for standards, especially compatible sync signals and interchangeable equipment, should be obvious to anyone who wants to make Super-8 a professional medium. But despite the obvious, inventive people seek to do things slightly differently, and almost always for what they perceive to be a good engineering reason. This urge to do one's own thing is also motivated by the thought of financial gain as the inventor's company reaps the benefits of a market place it hopes will become wedded to its proprietary (usually incompatible) approach.

Few strong voices tend to be raised in support of doing things in just one way, simply in order to get on with the business of doing things. Moreover, these isolated voices rarely have the media clout of a large company widely advertising its patented process in an attempt to corner the market.

The failure to agree on standards has led to production inefficiencies and, in some cases, virtually complete market collapse as giant companies refused to compromise on any one design. Examples close to the motion picture industry include 33 1/3 vs. 45 rpm record speeds, the videotape format controversy, and the choice of audio cassette design. RCA's 45 rpm disc with the large hole and second speed have kept record-handling equipment more expensive than it

should have been for years. The loss to one consumer may be only a few dollars or cents but the societal loss is in the millions of dollars. The multiplicity of videotape widths and formats was reduced somewhat with the well-known EIAJ-1 standard for 1/2 inch videotape, but then complicated by Sony's introduction of a 3/4 inch videotape and the option of reel-to-reel or cassette versions of 1/2-inch tape offered by Philips and Sony. The standard compact audio cassette is considered a classic of industry cooperation, initiated by Philips' unusual offer of royalty-free licenses to any company observing the technical specifications of Philips' compact cassette design. This led to the withdrawal from the market of competing cassette designs by 3M/Wollensak, RCA, and others who are now benefiting from the resulting enormous audio cassette market. A similar competition is in process to establish a preferred design for the new Videodisc, with many of the same companies in the running.

Standardization problems within the Super-8 industry are considered responsible for the failure of Super-8 film to become much more widely used as an audio-visual medium. In the late 1960's almost every projector manufacturer rushed to design his own automatic-threading, automatic-load-


ing Super-8 cartridge in the hopes of cornering the market. The thought was that the more convenient Super-8 projectors would replace harder-to-use 16mm equipment — a \$4-million annual market. Unfortunately, potential users found it difficult or impossible to decide between projection cartridges from Kodak, Bell and Howell, Technicolor, Fairchild, Bohn-Benton, and several others. As a result, most film users stayed with 16mm which, while somewhat harder to use, was at least an internationally standardized format.

Although the Super-8 projection cartridges were incompatible, one would naively think that at least the Super-8 sound film inside the cartridge was standard. This was actually not so, thanks to the imaginative design efforts of engineers in the different companies on how to record sound tracks. Some chose optical sound, others magnetic. Some recorded sound at 18 frames displacement from the picture, some 28 frames and some 125 frames. The result drove laboratories crazy and kept lab charges high as each Super-8 order had to be a custom order.

Today Super-8 sound tracks are almost invariably magnetic, and with sound displaced 18 frames from the picture. This has been the result of users expressing their preferences through their buying decisions in the marketplace, and not because of industry agreement or compromise. Basically the only option that remains besides magnetic or optical sound is the frame rate— 24 fps or 18 fps.

In their original design recommendations for the Super-8 format, Kodak designated 18 fps as the new silent film speed, with 24 fps as the sound speed. Subsequently, Kodak's Consumer Markets division introduced single-system sound-on-stripe Super-8 cameras (Ektasound), with just one running speed — 18 fps — which they now refer to as the "amateur sound speed", 24 fps being called the "professional sound speed". Equipment manufacturers are now asking SMPTE for sound test films at the 18 fps speed. Since the audio fidelity at 18 fps is more than adequate, enthusiastic proponents of the new speed like Lenny Lipton want everyone to save the additional 25% in film stock costs.

Diagram showing comparison between the new "1/F" (once-per-frame) sync pulse signal, and the conventional pilotone signal (60Hz sine wave, 50Hz in Europe), which is a perfectly acceptable alternate sync signal for Super-8 use. Most new sync cameras and projectors have a built-in 1/F switch.

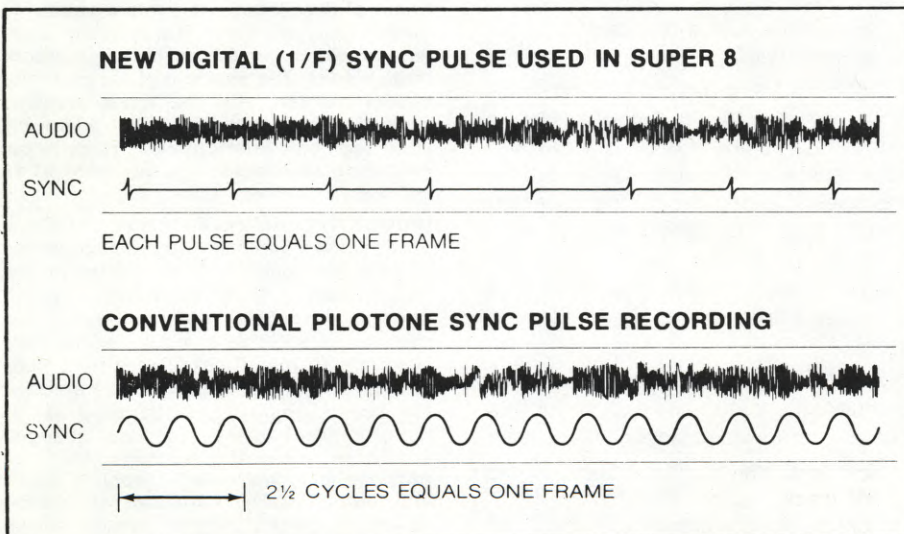

Lipton's eloquent defense of 18 fps in the accompanying article demonstrates the directly measurable benefits for any filmmaker who shoots 18 fps. What is not stated is the indirect disadvantage that accrues to the filmmaker and to all Super-8 filmmakers, because of the resulting confusion between speed options and the requirement for manufacturers to include every such option on all future equipment.

While each additional option may seem easy to defend, the additional cost added by the manufacturer increases the final cost of Super-8 equipment to the filmmaker and reduces the overall size of the industry. For example, sound projectors that can handle both Regular 8 and Super-8 cost about \$100 more than those exclusively Super-8.


The confusion produced by too many options extends everywhere. Will every Super-8 film festival require a leader on each film stating the projection speed? Even that won't prevent some false starts at the wrong speed, and the resulting amateurish environment. How will a teacher using Super-8 be sure of the speed? The potential for embarrassment will no doubt sometimes prevent the use of film in class. Will labs be slower to buy the more expensive sound equipment required for two-speed capability instead of just one speed? If so, this will postpone the day when complete Super-8 lab services will be available everywhere.

A Single "Professional" Sound Speed For Super-8

We strongly recommend 24 fps as the preferred sound speed. Film shot at 24 fps can be transferred to video on high-quality telecine projectors, and can be blown up to 16mm on a frame-for-frame basis. With this choice, there is a single sound speed for all professional film formats — 8, 16, 35, and 70mm.

A New Sync Signal For Super-8

We recommend that the Super-8 sync control track consist of a single pulse for each frame of film. The "pulse" may be a short burst of tone (nominal 1000Hz), a voltage spike, a square wave or a sine wave, or any other signal that can be converted by available electronic circuitry to one of the above. A multiplicity of waveforms are all compatible with the basic requirement of one "signal" for each frame of film. An important example is a simple switch closing once per frame (1/F). Such a switch (mechanical or optoelectronic) is used in most Super-8

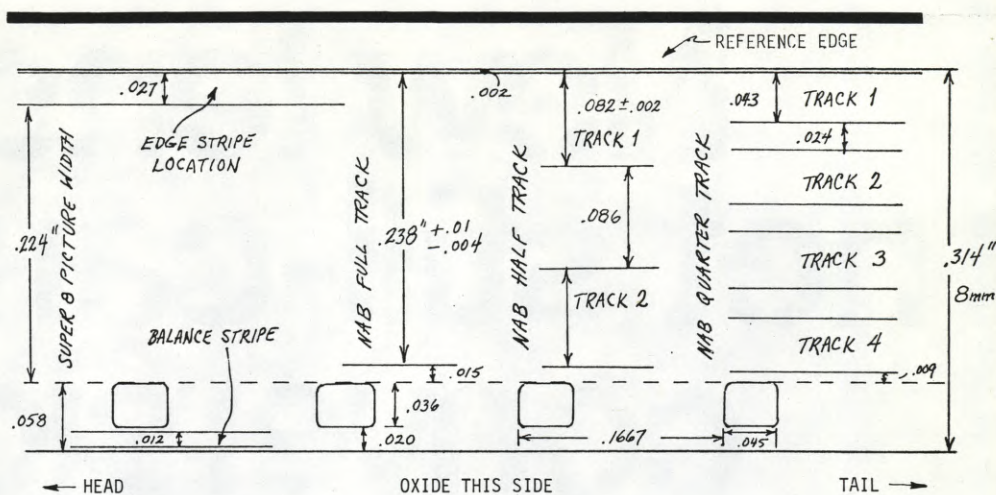

RECOMMENDED STANDARD TRACK POSITIONS ON SUPER-8 FULLCOAT MAG FILM

Super-8 fullcoat magnetic film has the same width, sprocket-hole size, and pitch as Super-8 picture film (ANSI Standard PH 22.161-1968). It is recommended that it be used in "A" wind, so that if run through a Super-8 sound projector it would have the emulsion (magnetic oxide) position away from the lens, in the normal magnetic stripe position.

The location of the magnetic record on the mag film is specified with reference to the edge opposite the sprocket holes. The dimensions and locations are defined to be the same as the NAB standards for quarter-inch magnetic tape. There is slightly more than one quarter-inch (.251 inches) between the reference edge and the inside edge of the sprocket holes.

Any recording made on track 1 of a four-track NAB recorder adapted to fullcoat, or track 1 of an adapted two-track NAB recorder, or an adapted full-track NAB recorder, provides a magnetic record in the area of the Super-8 magnetic edge stripe (.027 inches from the defined edge). Conversely, signals recorded on the magnetic film by a Super-8 recording projector could be read by track 1 of any format adapted NAB recorder, although with decreased signal/noise ratio in the larger format.

sync cameras and sync projectors. We call this "1/F" (once-per-frame) sync or "digital" sync to distinguish it from the conventional pilotone signal (60Hz sine wave, 50Hz in Europe) which is a perfectly acceptable alternate sync signal for Super-8 use.

Track Locations For Super 8 Fullcoat Magnetic Film

We recommend that Super-8 magnetic film have the same width, sprocket hole size, and pitch as Super-8 picture film (ANSI Standard PH 22.161-1968) and that it be used in "A" wind, with the emulsion (magnetic oxide) position away from the lens when run through a Super-8 projector.

The distance from the inside edge of a sprocket hole to the unsprocketed edge of Super-8 fullcoat is .255 inches, just slightly wider than quarter-inch magnetic tape. Because of this fortunate coincidence, there is no need to design new magnetic heads for use with Super-8 fullcoat. We recommend that the existing international standard track locations for quarter-inch tape (half-track, quarter-track, and full-track) be adopted as the standard track locations on Super-8 fullcoat magnetic

film. The position of the magnetic record on the fullcoat will overlap the normal magnetic edge stripe position on Super-8 sound picture film, whether quarter-track, half-track, or full-track magnetic heads are used. This choice of track location insures that the magnetic head in a Super-8 sound projector will be able to read the fullcoat sound track, and tracks recorded in Super-8 projectors can be played back on Super-8 fullcoat recorders. At Photokina in 1974 every manufacturer of fullcoat recording equipment and fullcoat editing equipment was compatible with this recommendation except one (and this one announced it would conform to the recommended practice in the future).

The ad hoc committee of SMPTE is considering many other recommended practices relating to sync sound Super-8 equipment, but these three are far and away the most important issues before us. Every potential user of Super-8 is also a participant in the process of establishing workable standards, for in the last analysis it will be the equipment that is bought and used that will define tomorrow's standards. ■

New lenses— not still-camera conversions. All genuine T1.4s.

Floating and aspheric elements, multiple coatings—these are the most *advanced* lenses you can buy.



Every photographic lens ever made was designed originally for one purpose, one lens-to-film distance, one film format. If you adapt it for a *different* use, it'll work—but not as well.

Adaptation compromises

Some high-speed lenses now available for motion picture use are adapted still-camera designs—but not ours. The others are good lenses—but, used in this different way, they're compromised.

Remounting problems

For example: The typical 35mm SLR still camera has a back focal distance about $\frac{3}{4}$

inch shorter than one major studio camera. So to adapt it, you have to put the SLR lens into a new mount, or even a completely new barrel. *Or even move the glass elements!*

Critical back focus

And back focus is critical, of course. With a 50mm lens at f/2.8, the depth of focus behind the lens is plus or minus two thousandths of an inch. With a 25mm lens at f/1.4, *it's a quarter of that.*

Wasted trade-offs

Moreover, the SLR lens was designed to cover the Leica frame. To get even coverage over the bigger format, *with high speed*, the designer had to make certain trade-offs. On the SLR, they may have been worth it. For the motion-picture frame, they're wasted.

Doing it the hard way

To design a high-speed lens exclusively for motion picture use takes more time and costs more money, naturally.

But, given a good designer, you get a better lens.

\$350,000 investment

So we invested just over \$350,000—and Zeiss designed a brand-new, no-compromise set of lenses. Specifically for Arriflex cameras.

New design parameter: "Make the best lenses."

The Zeiss designers had the unique advantage of starting from the beginning. We said: "Don't just make the best high-speed lenses. Make the best *motion-picture* lenses in the world." So they did.



Made for the 35BL and 352C

Most modern technology

Zeiss used aspherical elements, a floating element, and multi-layer coatings on every



The fastest set of lenses on the market — all with the standard Arri bayonet mount. The 25mm focusses down to 10 inches, the 35mm to 15 inches, the 50mm to 27.5 inches and the 85mm to 40 inches.

Designed by Zeiss for Arriflex.

glass-to-air surface. Up to six separate layers.

New spontaneity possible

These lenses are made for the new style of shooting encouraged by the 35BL.

Night-for-night: almost no flare. Distant detail

We've seen night-for-night footage. Wide open, on New York City streets — car

headlights, neon signs. Incredible. Almost no flare at all, and astonishing penetration. You can see details on this block and for several blocks beyond — lit just by those signs and the street lamps!

With good lighting, too: best lenses you can buy

Naturally, these lenses perform just as well in daylight and on the soundstage. They're

made by Zeiss, after all — using the latest design techniques, and sparing no expense. We hope you'll run some comparison tests. We're confident of the results.

ARRI

ARRIFLEX COMPANY OF AMERICA

PHONES: (212) 932-3403 AND (213) 845-7687
P.O. BOX 1050, WOODSIDE, N.Y. 11377; AND
1011 CHESTNUT ST., BURBANK, CALIF. 91502

CASE AGAINST SUPER-8 Continued from Page 1255

Super-8, the Super-8 producer will have the added expense of working around location problems without the benefit of these tools.

There are other little gadgets for 16mm cameras that are designed specifically for low budget filming. Among these are freeze-frame devices, slide duplicators and the like. In addition, there are certain 16mm cameras that are particularly suited to producing professional films on a minimum budget. The Bolex Rex 5 is probably the best example, with a myriad of in-camera low budget trickery, as well as reflex viewing. It has a variable shutter, automatic fades and dissolves, frame counter, backwind for multiple exposures, matte box for split screens and mattes, single-frame, variable-speed time-exposure, plus the availability of 400' magazines, crystal motors and an underwater housing. The imaginative low budget producer can make a very professional looking film complete with effects and titles with the raw stock never leaving the camera. The Bolex body can still be had for around \$1000. new, and that would be hard to beat in Super-8.

Because sound gear is totally independent of the cinematography, it should be obvious that the expenses involved for sound recording and transfer should be about the same regardless of the film format employed. It is true that there have been new low budget sound recording/transferring techniques developed for Super-8, most notably the "Super8 Sound Recorder". However, if this quality is acceptable, there is no reason why the Super8 Sound Recorder couldn't be used on a Super Panavision 70 production as well as 16mm. In general, most low budget techniques designed for Super-8 can be applied to the larger formats but the opposite is not always true.

Now we come to physical size. First, size of equipment. As Super-8 gets

more sophisticated, the cameras are getting bigger while 16mm cameras are getting smaller. I have recently seen a prototype of a new silent-reflexed, double-system 16mm camera made by a major professional camera company that is about the same size and weight as the larger Super-8 cameras. I do not believe there is that much size or weight advantage to Super-8 for a given class of camera. However, this parameter is easy to judge and each producer can decide for himself. The size of the film is a different story. There is an optimum size for every product that must be handled by human beings. This is a science known as human engineering, or anatomical design. An example of poor anatomical design is the digital calculator company, which, in its zeal to miniaturize, made a calculator so small that the human finger would depress four buttons at once, due to the small size and close proximity of the buttons.

Obviously, there is always an anatomical optimum for any product that is handled. Most editors will agree that 35mm (not to mention 70mm) is quite bulky to work with. On the other hand, 8mm and Super-8 are most assuredly on the small side of perfection. (Ask any Super-8 editor who can be identified by his squinty, bloodshot eyes and frazzled nerves). The optimum anatomical size is somewhere between these two extremes and most likely around 15mm to 17mm.

Now a clear picture is beginning to form. In reality, 16mm is better suited to low budget production in most situations. The cost of camera, lighting and sound gear is approximately the same for the 16mm and Super-8 formats. The 16mm format, however, has several advantages in available light, low budget location situations as previously discussed. In addition there is a greater variety of film stocks, processing and devices available to the larger formats that can facilitate low budget techniques. Moreover, the larger size of 16mm can cope with the less-than-immaculate and haphazard conditions that surround extremely low budget productions where the Super-8 format would yield totally unacceptable results.

The notion that Super-8 production is less expensive than 16mm is largely a myth. One of the main reasons for this myth is that psychologically one is willing to accept much lower standards of quality when shooting Super-8. ("That's not bad for Super-8.") Moreover, the average Super-8 filmmaker is more dedicated to low-budget technique. If the Super-8 producer would apply these same standards and low budget

zeal to 16mm production, he would be surprised to find a superior end product with less hassle for the same, if not smaller, budget.

So where is the great advantage of Super-8? Almost all overhead is the same no matter what format you use: film crews, post-production, equipment, lighting, sound recording/transfer, transportation, rent, shipping, etc. As we have seen, Super-8 can actually be more expensive in many situations. With specific exceptions, the advantage of Super-8 can be summed up in one statement: "Super-8 offers an advantage over larger formats only when the cost of the raw stock and processing comprise the major portion of the budget." Thus, if the overhead can be reduced to the point where the raw stock accounts for more than 50% of the total production costs (and Super-8 image quality is acceptable), then Super-8 offers a decided advantage.

Into this category will fall sports analysis, student films and small TV news stations where the new Kodak Super-8 video transfer machine will offer decided advantages over electronic news gathering.

But for the majority of film production — and this includes the most simple educational, documentary, in-plant and commercial films — the cost of raw stock is a mere fraction of the total budget once all production, pre-production and post-production costs and overhead are realistically calculated. The bottom line figures will usually indicate that the larger format will pose fewer problems, facilitate quicker production, and, in the end, save money over Super-8 production. Not to mention the fact that a larger format produces a far superior image, and always will. ■

CINEMA WORKSHOP Continued from Page 1236

ing image quality is the generation of the projector print. I have recently seen some large screen projection tests, and am convinced that projected Kodachrome Super-8 original is indistinguishable from (if not better than) standard third-generation 16mm (16mm release from internegative of 16mm ECO original). This is a prime consideration for camera-original direct projection applications, such as film-to-video and sports analysis.

The cinematographer should be familiar with the basic statistics for a reference. However, an exhaustive and comprehensive analysis of the format systems must precede a final decision on format size. ■

To Classified Advertisers

Copy deadline for classified advertising is the 1st of month, preceding publication date. Mail copy and remittance to cover cost to

AMERICAN CINEMATOGRAPHER
1782 No. Orange Dr.
Hollywood 28, Calif.

INDUSTRY ACTIVITIES

A.S.C. CINEMATOGRAPHERS AVAILABLE FOR SEMINARS, LECTURES, INFORMAL DISCUSSIONS AND QUESTIONS & ANSWERS SESSIONS.

The following Members of the American Society of Cinematographers have indicated their availability to appear for seminars, lectures, informal discussions and questions and answers sessions pertaining to motion picture and television photography, lighting, special photographic effects and production in general: Ted Voigtländer, Alan Stensvold, Vilmos Zsigmond, Ernest Laszlo, L.B. Abbott, Lloyd Ahern, Chuck Austin, Victor Duncan, Ray Fernstrom, Lee Garmes, Burnett Guffey, Gerald Hirschfeld, Michel Hugo, Victor J. Kemper, Andrew Laszlo, Frank W. Stanley, Richard Shore, Earl Rath, Sol Negrin, Richard Moore, Fred Mandl, Harry Wolf, Ralph Woolsey, Taylor Byars, Richard A. Kelley, David S. Horsley and James Wong Howe.

Arrangements as to availability and other details are to be made directly with the individual A.S.C. Member. For further information, contact: American Society of Cinematographers, P.O. Box 2230, Hollywood, California 90028. Telephone: (213) 876-5080.

REORGANIZATION OF SUPER-8 INSTITUTE

Mr. Soo Hum, motion picture producer, researcher and writer on all aspects of Super-8 production and post-production, has been appointed the new President of the Professional Super-8 Film Institute.

The Institute was originally formed in August of 1973 to meet the needs of people who were interested in obtaining the maximum professional quality from Super-8 film and equipment, and to have an organization where they could get in touch with others who were equally seriously interested in upgrading the quality of work in this film format. This basic concept is still the prime directive of the organization. In light of the ever growing volume of software, the Institute will expand its activities to provide detailed reports oriented to the industrial user.

The Institute's new program will take the form of an Information Release every second month commencing in June. The releases will contain the latest in-depth reports on professional

Super-8 production and technology, subscriber feedback, and its own unique equipment reports.

The Institute is in the process of compiling the first Super-8 *Information Resource Directory*. This publication contains the "what" and "where-to-find-it" of Super-8 professional services that are available to the serious Super-8 film-maker. The Directory will be updated periodically in keeping with the Institute's policy of having the latest and most definitive information constantly available to its readers. They will all be based on actual use of the service or product by the research staff of the Institute.

The Institute will also be reporting on Super-8's involvement in the videotape field. Many people today are shooting productions in Super-8 film because of the light weight and low cost as compared to conventional 16mm and 35mm equipment and film, and also compared to portable videotape equipment. The developed Super-8 color films are then transferred to videotape, edited in videotape, and the

Continued on Page 1339

THE STATE OF THE ART Continued from Page 1252

tioned optimism, the growth of Super-8 as a professional *filming* format will remain stunted until the last formidable obstacle in its path has been removed — namely, the inability to get Super-8 prints of even acceptable home-movies quality from Super-8 originals shot with cartridge-load cameras.

Consider the irony and incongruity of the fact that Eastman originated the Super-8 format in cartridge-load form. Moreover, it developed highly sophisticated cameras to accept that cartridge and encouraged many other manufacturers to do so. Yet, with all of this emphasis on the cartridge, the simple fact is that all of Eastman's cartridge-loaded color films on the market to date "are designed for optimum projection" — to use the company's own term. In other words, they are all inherently high-contrast films which look fine when projected, but which make perfectly abominable prints when used as printing media. Using inter-negatives made from these high-contrast originals simply compounds the felony.

Eastman blithely talks its way around this problem by telling us that if we want professional-quality prints we should shoot in 35mm or 16mm and make Super-8 reduction prints. The only other alternative is to shoot in

Double Super-8, using one of the few cameras on the market designed to that format — and which are the same size as 16mm cameras. In either case, the advantages of using small, highly sophisticated cartridge-load Super-8 cameras are negated.

No "professional" in his right mind would consider going through all the trauma of making a film and then projecting his precious original for all of the screenings. Yet, that is what he must do if he uses cartridge-load cameras and hopes to get an image of professional quality onto the screen.

It is hoped that it will finally dawn on the Eastman people that talk of "professional Super-8" is all very fine, but that if the term is to amount to anything more than fine-sounding talk, the company should make its ECO reversal and 7247 color negative stocks available in cartridge-load form.

When I have made this suggestion to Eastman executives over the years, I have been told, "As soon as there is sufficient demand, the company will do something about it."

Gentlemen, the demand exists — now!

The purpose of this special Professional Super-8 issue of *American Cinematographer* is not only to provide a comprehensive summation of the very latest state-of-the-art developments in equipment and techniques for Super-8 production on a "professional" level, but also to present as objectively as possible the "pros" and "cons" of such production. It is not the purpose of this publication to endorse or recommend any of the methods or equipment discussed in these pages, but merely to make the data available, so that the reader may form his own judgment on the basis of the facts presented — plus, it is hoped, his own research.

The major bulk of the subject content of this issue was researched, assembled and edited by Robert O. Doyle, Julie Mamolen and Anton Wilson. *American Cinematographer* wishes to express deepest gratitude to these people — as well as to the individual contributors — for their tremendous dedication, attention to detail and sheer professionalism in making available the vast mass of information presented in these pages. ■

(EDITOR'S NOTE: When various experts in the field were invited to contribute feature articles for this special Professional Super-8 issue, the response was so overwhelming that, despite the addition of 16 extra pages, we regretfully had to omit several excellent articles. However, they will appear in the next — December, 1975 — issue of American Cinematographer.)

We'd like to shed a little light on the best available light story in the world.

And a system called Fujica Single-8.

Fujica Single-8 film. Our film was developed about the same time as Super-8. It's based on similar principals. But with some very important differences.

Ours is thinner, yet stronger. So our cameras can be more compact.

Our cartridge permits unlimited backwinding for easier special effects.

And now, another advantage. Speed. We've created the fastest 8mm color film in the world. Fujichrome RT200, 200ASA.

The Fujica available light system. To take full advantage of our faster film, we built some new cameras. Cameras with ultra-fast lenses and wider shutters than ever before. So now we have the fastest film and the cameras that give the most light for exposure. An unbeatable available light combination.

The Fujica ZX300. It has a fast f1.2 lens (8.6 to 23mm zoom). A super-wide 230° shutter. And with our film it's simply the best available light 8mm zoom camera on the market. It also

offers an optional fader and rewriter. Superb sound with the Fujica Puls-Sync system. And a lot more.

The Fujica AX100. A compact camera (only 11.5 oz.) with a fast 1.1 lens, a wider shutter and our matchless available light capacity. It's available with a special watertight case so you can shoot underwater, off-shore, in rain, or snow.

And the whole "shooting match" costs less than you'd usually pay for an underwater housing alone.

See what we mean. For a closer look at the Fujica Single-8 story visit your nearest Fuji CineCenter.

To find the CineCenter nearest you, just call toll-free (800) 477-4700.

FUJIFILM Fujica Single-8
FUJICA



See the Fujica Single-8 cameras and film at:

California

Bill's Camera
6022 Warner Ave.
Huntington Beach,
Calif. 92647

Cal's Camera Inc.
1770 Newport Blvd.
Costa Mesa, Calif. 92627

Camera Mart
625 "B" Street
San Diego, Calif. 92101

Dave's Camera Exchange
474 E. 17th Street
Costa Mesa, Calif. 92627

Desert Valley Camera
Victor Valley
Shopping Center
Victorville, Calif. 92392

Fresno Camera Exchange
1242 Fulton Mall
Fresno, Calif. 93721

Olympic Camera
828 W. Olympic Blvd.
Los Angeles, Calif. 90015

Colorado

Camera Caboose
1610 S. College Ave.
Fort Collins, Colo. 80521

Englewood Camera
3462 S. Acoma Street
Englewood, Colo. 80110

Ken's Camera
1513 8th Ave.
Greely, Colo. 80631

Shutterbug Camera Shop
750 Citadel Drive East
Colorado Springs,
Colo. 80909

Florida

Abner's Camera
Exchange
811 Central Ave.
St. Petersburg,
Fla. 33701

Burton Camera & Repair
1022 N.E. 163rd Street
Miami Beach, Fla. 33162

Clik Camera
2718 W. Davie Blvd.
Ft. Lauderdale, Fla.

Colonial Photo
634 N. Mills Ave.
Orlando, Fla. 32803

London Camera
518 N.E. 167th Street
N. Miami Beach, Fla. 33161

Olsson Dist.
1244 Lime Ave.
Sarasota, Fla. 33577

Illinois

Belvedere Camera
Center
1532 Belvedere Road
Waukegan, Ill. 60085

Lion Photo Supply
500 West Golf Road
Schaumburg, Ill. 60172

Randhurst Camera
999 Elmhurst Road
Mt. Prospect, Ill. 60056

Tom Hubbard's
Camera & Gallery
4607 N. Prospect
Peoria Heights, Ill. 61614

United Camera
301 N. Lincoln Ave.
Chicago, Ill. 60657

Maryland

Hacks
134 Main Street
Annapolis, Md. 21401

Perma-tone Studios
& Camera Shop
8368 Loch Raven Road
Towson, Md. 21204

Massachusetts

Ferranti & Dege
1252 Mass. Ave.
Cambridge, Mass. 02139

Michigan

Cavaller Camera
1265 S. 11th Street
Niles, Mich. 49120

J.W. Knapp Co.
300 S. Washington
Lansing, Mich. 48914

Jensen's Art &
Craft Center
16 State Street
Hart, Mich. 49420

Linn Camera Shop Inc.
3240 Mall Court
Lansing, Mich. 48912

Pepers Camera
29096 Van Dyke
Warren, Mich. 48093

Minnesota

Image 6
4941 France Avenue S.
Edina, Minn. 55410

Virginia Boat &
Sporting Goods
205 S. 5th Avenue
Virginia, Minn. 55792

Webber & Judd
123 1st Avenue S.W.
Rochester, Minn. 55901

Missouri

The Mechanical Eye
2450 Grand Suite 211
Kansas City, Mo. 64108

Montana

Rimrock Camera
Rimrock Shopping Center
Billings, Montana

New Jersey

Marvel Photo
Englewood Cliffs, N.J.

New York

104 Camera World
104 W. 32nd Street
New York, N.Y. 10001

North Carolina

Carolina Camera Center
2715 D Grandview Ave.
Greensborough,
N.C. 27408

Ohio

Clik Camera
41 W. High Street
Springfield, Ohio 45502

Gross Photo
236 Huron Street
Toledo, Ohio 43604

South Carolina

Fant's Camera Shop
107 Cater Street
Anderson, S.C. 29621

Texas

Foto Center
215 E. Houston
San Antonio, Texas 78205

Unicam
2411 Ross Avenue
Dallas, Texas 75201

Virginia

Photocam Inc.
8766 Richmond Hwy.
Alexandria, Va. 22309

Washington

Wasem's Inc.
800 6th Street
Clarkston, Wash. 99403

Wisconsin

Meuer Photoart House
East Town Mall
Madison, Wisc. 53704

Meuer Photoart House
West Gate Shopping Mall
Madison, Wisc. 53705

Meuer Photoart House
411 State Street
Madison, Wisc. 53703

Mike Crivellos
Camera Center
7346 W. Greenfield Ave.
W. Allis, Wisc. 53214

Photo Copy &
Camera Shop
710 Barstow
Waukesha, Wisc. 53186

Seyforth's Inc.
218 N. Bridge Street
Chippewa Falls,
Wisc. 54729

SUPER-8 AT MIT Continued from Page 1287

students can be taught in a production course is the difference between "shooting" and "looking." Shooting here implies an attitude that there is a reality out there, and that to point the camera in the general direction of the highest action will somehow "capture" or "get" it on film. With notable exceptions due to the grace of chance, nothing could be further from the truth. The fact of the matter is that seeing through a movie camera is physically more difficult than with your naked eyes. Unless one strains and puts out some positive force through the viewfinder to "see" what is going on in a scene, that reality will never be visible on the screen.

Quality camera work involves the mind and eye in a constant interplay of proposal and rejection of hypotheses. Let me give a few examples. What does a gesture mean? How can one translate that gesture into a comprehensible and meaningful form on the screen for the viewer. All reality and images of it, however formed, are susceptible to human misinterpretation. In camera work of both real time and scripted situations questions constantly arise as to when and where to look in order to convey the most meaning. For example, in an interaction between two or more people, when does one look at the principal action, when does one look for the responses going on with the others involved in the interaction, or when does one look at both? Meaning here must be understood only in a general context as expressing the intent of the filmmaker because presentation of ambiguity, suspense, development of character, etc., all fall within the context of meaning. These questions arise continuously in quality camerawork, greatly removing it from the passive act of letting the camera run.

Although cheaper film can encourage less disciplined camera work, the other side of the coin has an obvious virtue. Only with the proper discipline to "see" and think about what you're doing is it true that the more you shoot, the better you get. Teaching 16mm has brought up some cases that relate to this issue of cheap film. Sometimes a student will go out and shoot a few thousand feet of 16mm film and come back with nothing, i.e., there simply is not a film there (for whatever reasons) — a very expensive and discouraging experience — and the student may give up. It requires much effort on the part of the teacher to

convince the person that he or she might still have a future in film. When disaster strikes in Super-8, reactions are less severe. Because it's cheaper, one can either re-do the project quickly or forget about it more easily with less ego involvement, in order to go on to another film.

A fundamental teaching issue in Super-8 is editing, which includes the problems (and sometimes virtues) of editing original. Though Super-8 workprints are a standard lab practice now, and several establishments offer ink edge coding of original and workprint, the fact remains that because of the high costs involved, editing workprint is not feasible for a teaching method in Super-8.

With no workprint, students learning to edit Super-8 never get that "editor's feeling" that the film itself is nothing of value, that lack of respect that lets you run it onto the floor when you want to look at newly-cut sequence in a hurry. In Super-8 each cut shows, even when two contiguous pieces are reunited, because of that glitch of a splice. Less adventurous editing and less experimentation are a possible result of this. In our experience both at MIT and summer workshops, some students tend to get one idea for editing their film and never change it. There just isn't the possibility of attempting to intercut two diverse sequences, to see how it looks and, if it doesn't look good, to reconstitute the sequence and start again. The same is true in 16mm when, for economic reasons, one edits original. But in 16mm one of the techniques available is to look at rushes on a gentle editing machine and then decide what portions are valuable enough to selectively workprint. In the Super-8 medium a big step would be made in the right direction if Kodak would see fit to print latent edge numbers on Super-8 raw stock.

But there is another more positive aspect to the necessity of editing original in Super-8. On the one hand, one may not have the freedom of making decisions and then going back on them. But on the other, good editors are often very decisive, and Super-8 editing of original certainly encourages decisiveness. Good editors are often quick and Super-8 editing of original encourages speed, since the more time you spend editing with Super-8 original, the dirtier and more scratched it gets.

As in any skill, craft, or art, there exists in Super-8 a varying relationship between technical competence and imaginative conception, or authentic quality. That is to say, we have seen



Fuji CineCenters

some good films made by very precise craftsmen and we have also seen some good films made by very sloppy filmmakers. No one, to my knowledge, has quite put a finger on the role that chance plays in a work. The extent to which lack of experimentation holds back creative development can be confounded when the same rigidity expresses itself as discipline and leads to productivity. On the one hand, lack of care (dirt on the film, inattention to exposure, excessive camera movement) allows for experimentation that can be productive. On the other hand, it is easier to relax or change disciplines than it is to change bad habits. Super-8 incorporates both approaches because editing original demands discipline and cheapness allows experimentation.

On the most practical side, it might be useful to relate some of the problems we have encountered over the years in teaching Super-8 sync. Dependability has been the key problem. Nothing is more frustrating to someone trying to learn filmmaking than wasting money on footage that is out of focus, registration, or not in sync. There is little doubt that at this point Super-8 equipment is generally less rugged, less dependable, and requires more frequent maintenance than 16mm. As a result, our staff has had to become much more alert and vigilant when checking out Super-8 equipment to students. We have recently developed a single sync checker for cameras that consists of a crystal-controlled light emitting diode which flashes at 24 frames per second. When viewed through the aperture plate of a running crystal sync camera, strobing of the L.E.D. indicates out of sync. Cassette tape recorders are checked simply by running a few feet of sound and then playing it back on a resolver to see if it resolves.

Battery capacity for given equipment is generally less in Super-8 than 16mm; the standard battery supplies in Super-8 don't run the cameras and tape recorders for as much time as in 16mm. Here, too, staff must be more attentive in checking battery charge each time before equipment is given out. Notable and welcome exceptions to this problem are the many Sony audio recorders which are equipped by the manufacturer with built-in chargers for "NICAD" battery packs. Here the filmmaker can generally take along an AC cord and charge the batteries at home or in the field whenever necessary.

High-quality, reliable, safe projection is one of the most important requirements for film-teaching in any gauge. Only in projection-size images can



Former M.I.T. students Del Hillgartner and Lisa Jackson on location with the early Super-8 sync rigs. The equipment is remarkably light and simple to operate, yet retains certain design features, such as built in slate-light systems and "through the lens" light metering, that enable beginning students to learn double-system filmmaking in an inexpensive but professional manner.

camera work be judged and editing timing be accurately and adequately evaluated. Also, in classroom situations, starting in (and keeping in) sync is a necessity in order to preserve sanity and egos. It simply isn't possible to evaluate an out-of-sync film.

Finding a satisfactory projector for double-system work has been one of our toughest problems to solve at MIT. In general, the most frustrating Super-8 projector problems are automatic threading systems that are difficult to unthread and gates and film paths that are inaccessible for cleaning. We have gone through too many projector/recorder combinations to mention. We've tried projectors with sync motors, Super-8 mag film reproducers slaved to projectors, and both projector and magnetic film reproducer "locked" to the line with simultaneous start. We've been through projectors that had ravenous appetites for film and splices and projectors that were very gentle but dim. Finally, we've put xenon arc lamps in dim gentle projectors. The last two of these trials deserve the most attention. Our first really reliable machine was the Kodak TVM100A. Its AC sync motor made double-system sync problems easier, it threaded easily, and the gate opened wide for cleaning. It also had a five-blade shutter, so it could be used for video transfers. The one problem was that it was too dim. So we put a G.E. Marc 300 lamp in it. Because the lamp was putting out a beam for 16mm and wasn't as efficient as it would have been if condensed for the Super-8 aperture, it was still too dim. Thus, we went to another similar Kodak machine, the M 100A (which is unfortunately no longer manu-

factured). The M 100A with its normal projection lamp puts more light through the film because it has a three-blade shutter and, with a f/1.2 lens, it gives a superb bright image. The problem was that since it wasn't a TV projector, Kodak didn't put a sync motor in it. So we added one, but we had to leave in the existing motor because of the complexity of the on-off controls. The switching for the two motors is more complicated than it needs to be, but it works. For playing back magnetic film double-system with the M 100A we use another reliable product, the Super8 Sound Recorder, on remote start, with its motor locked to the A.C. line.

This discussion of the history, equipment experiences, teaching dispositions, and beliefs about the values of Super-8 filmmaking of the M.I.T. Film Section would be incomplete without an indication of our thoughts about the pedagogical, aesthetic and formal implications that this Super-8 dynamic might have for the future of film and visual communication. In a following article, a review of some of the films made by our students in Super-8 attempts to show how these thoughts are elicited by the films themselves.

*(ABOUT THE AUTHOR: JOHN TERRY is an Assistant Professor of Film at the Massachusetts Institute of Technology. As an independent filmmaker he has made numerous experimental documentaries. He also works commercially as a free-lance cinematographer. He filmed and produced the Super-8 segments of the N.E.T. production, **An American Family**. Recently he was the director of photography for a French feature comedy, shot in 16mm and blown up to 35mm, which stars Jean Pierre Leaud and is called *Les Lolos de Lola*.)*

the "COR"
and COR Jr.
 a duet of super 8
 Continuous Optical
 Reduction printers
 that play sweet
 tunes of both
 quality and speed



**One of them is sure to produce
 higher profits for your lab!**

- Continuous Optical Reduction • Resolution in excess of 108 line pairs/mm
- Aerial image optical system for sharp, cleaner prints • f/2 Illumination System

"COR-Jr"

- Speed—180 FPM on negative side
- Color Additive, Manual Light Valves only
- Silent only
- Uni-directional printing—direction of film travel available in either left or right

"COR"

- Speed—180 FPM on negative side with light changes. 400 FPM on negative side—one light printing
- Color Additive: Automatic or Manual Light Valves
- Silent, Optical or Magnetic Sound
- Bi-directional printing—no negative rewinding or rethreading



PETERSON ENTERPRISES, INC., "the printer people"

1840 Pickwick Avenue, Glenview, Illinois 60025 (312) 729-1010 Telex: 289-438

Peterson International Ltd. Subsidiary of Peterson Enterprises, Inc.

Sales & Service Representatives

European *W. Vinten Limited*
Suffolk, England

Southern Hemisphere *Filmtronics (Australia) PTY. Limited*
Sydney, Australia

SUPER-8 EDITING

Continued from Page 1273

reader for the picture head, it costs \$125.00. Sync drive is included, but variable speed costs \$150.00. Manual inching is provided.

This deck is an all metal machine weighing about 45 pounds. The viewer, a modified Goko, provides an adequate 3.5"x5" picture. The deck is essentially a stripped down version of the \$2600.00 PPC-25 four plate. The basic high quality drives, sprockets and controls of the PPC-25 are retained. At \$1095.00, this machine provides the modestly endowed filmmaker with an alternative to vertical editing.

Without a doubt, the Super-8 Research tables are designed by filmmakers for filmmakers. Further, the company adheres to the notion shared by most manufacturers in the Super-8 editing field, that all equipment must have multiple uses, provide complete in-house capabilities, and be adaptable for improvement over the years.

Optasound Corporation:

Mercifully, the manufacturers of Super-8 editing equipment have been relatively subdued in their advertising claims. They have generally stayed with the facts and left the users to judge for themselves.

Not so with Optasound! Though still not delivering any units at the time of this writing (early June), the company makes claims such as "Now the ESTEC gives Super-8 its Voice" and "In editing alone, and sound editing in particular, Super-8 has fallen short of its promise. Until now. Now, in a single step, the ESTEC closes the gap". (From their latest promotional piece.)

Hype is hype, but the Leacock system was introduced in 1972 and since then there has been a steady stream of excellent equipment designed for editing Super-8 picture and

sound. True, this company is introducing some innovations, and they are needed and appreciated, but enough already! After years of misleading promises, the game has become tiresome. Let's see some equipment, or, as the saying goes, "Put up or shut up".

At \$2950.00, the ESTEC console is designed to be a complete post-production unit. It can be used to transfer, to edit both sound and picture, to mix multiple sync tracks to picture, and to transfer the completed mixed track to edge stripe at high speed. The ESTEC also allows transfer of single-system sound to fullcoat for conventional double-system editing.

As a conventional editing machine, the Estec does not offer a great deal. Due to its vertical configuration, splicing and film handling is a little awkward. The picture is small and difficult to see. A Muray viewer on a \$3000.00 machine with ESTEC's sophistication seems a little bizarre. All developmental efforts seem to have gone into the electronics and sound functions; with the optical aspects kind of thrown on. As a result, syncing rushes without slates is an impossibility.

Where sound is concerned, the ESTEC is superb. The electronics are so good that several generations of mixdowns are possible without significant degradation of the tracks. The right fullcoat movement is capable of recording two separate sound tracks on one strand of fullcoat. These two tracks can then either be mixed to the edge stripe or to fullcoat. (Either to the left fullcoat movement or to an external recorder) More than two tracks would require mix-downs.

Again considering the sophistication of this machine, it is strange that four-track capability was not built in. Super-8 Fullcoat is capable of four-track recording and quad heads are readily available. If not as standard

equipment, the four-track capability on the right fullcoat movement should be an option.

Prior to the ESTEC, all transfers to Super-8 magnetic edge stripe of single strand films had to be done on projectors in real time. The quality was good, but the transfer was slow and there was always the chance of scratching the film. With the ESTEC, sound can be transferred at twice normal speed (48 fps) without projection. There is virtually no chance of scratches.

The feature most discussed about the ESTEC has been the electronic editing. It is basically a system of transfer editing via electronic-cue-activated re-recording from an original to a master. Film is marked and cut in the usual manner, but each sound segment is cued up with an electronic start and stop mark. At the appropriate time, this cue noiselessly puts the master track into record, and on the stop cue takes it out of record. It does it exactly on the desired frame. There is no noise between the butted segments. The cue marks are recorded while the transports are stationary.

If the ESTEC ever gets into full production, it will be a powerful tool for Super-8 filmmakers. Just to be able to mix multiple sync tracks to picture and to transfer at double speed without projection, make it worth the price.



The Heavies: Steenbeck, KEM, and Moviola.



A sure sign that professional Super-8 is a reality comes from the introduction of Super-8 editing equipment by the "heavies" in the field. Both KEM and Steenbeck have an established line of equipment, and Moviola, it is rumored, may introduce a four-plate later this year.

Steenbeck

The current model Steenbeck machines are designed for Super-8

(LEFT) Specialties Design Co. has produced a Super-8 "Moviola Junior", an inexpensive motorized 4-gang sync block built into a light table, to which the film-maker adds a viewer and rewinds. (RIGHT) The first completely Super-8 horizontal editing table to go into full-scale production, the MKM Model 824, is still the most widely used. A 6-plate version will soon be available.

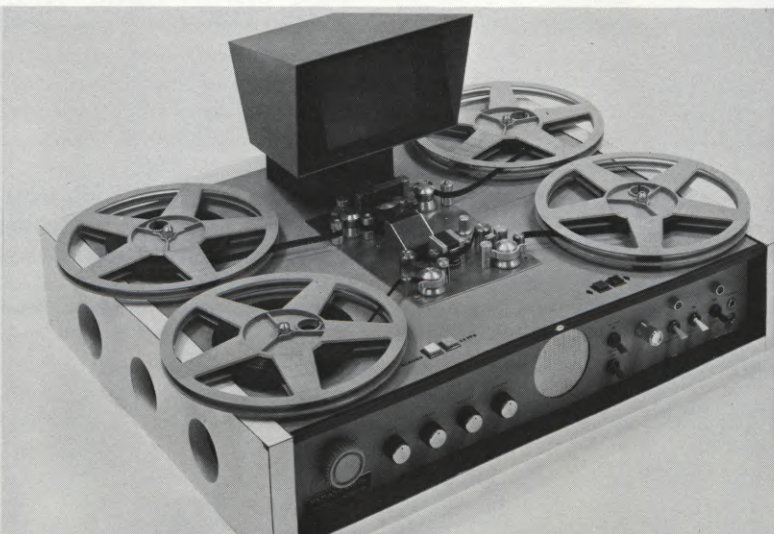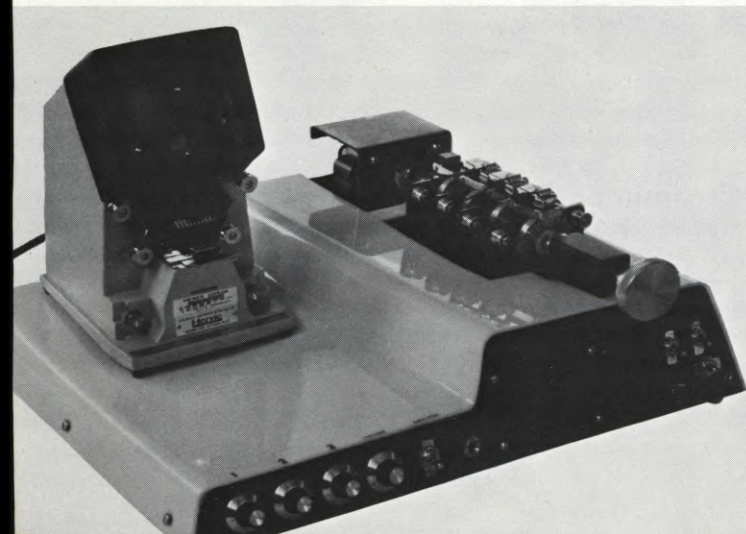

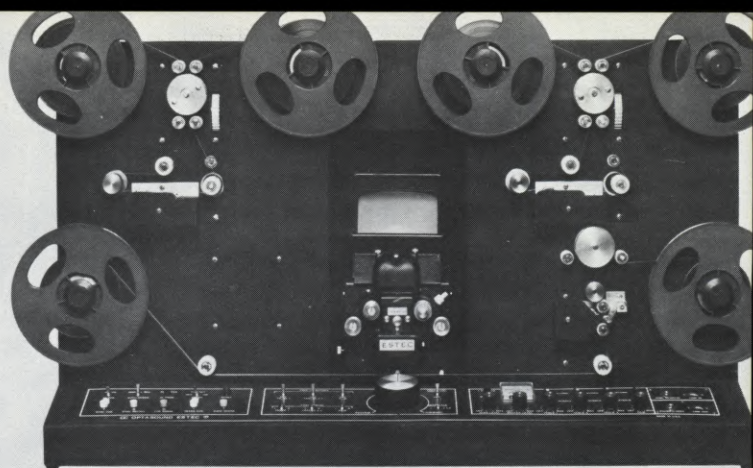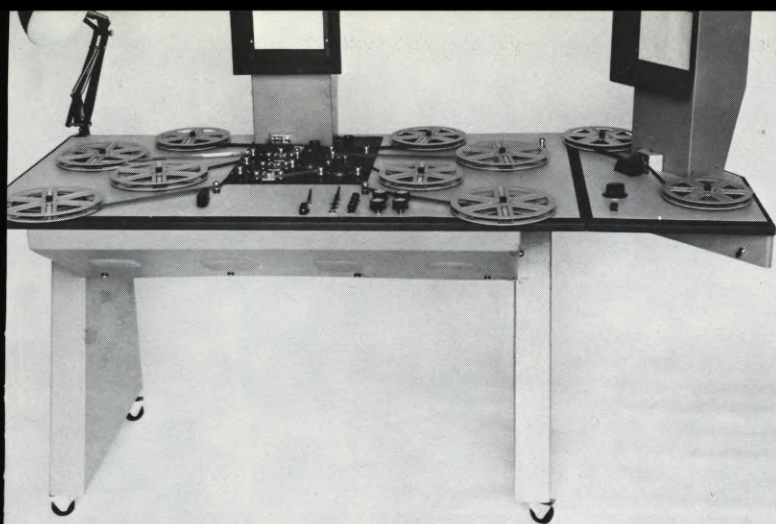

(LEFT) Super-8 Research Associates provides the greatest versatility in Super-8 horizontal editing tables. Their basic 4-plate may be expanded as economics and editing needs dictate, with the ultimate being the 10-plate version shown here. (RIGHT) A prototype version of Optasound's ESTEC, which is designed as an ambitious interlock dubbing and mixing console, with two Super-8 fullcoat tracks and one Super-8 picture. Sound editing is accomplished through "spliceless" electronic cueing of tracks.

picture and 16mm fullcoat track. Future models will have the option of Super-8 fullcoat. One machine allows the interchanging of Super-8 and 16mm picture heads. Both machines are equipped with optical/magnetic single-system sound readers.

The ST 1068S is a non-interchangeable four-plate model (\$5800). The viewer is bright and the image is a fairly sharp 6"x8". Functions parallel those of standard Steenbeck tables. 24 fps sync speed plus a variable speed from 1-200 fps forward/reverse. The drive system employs an electronically governed DC motor and is operated via a switch lever. The picture transport is very easy on film and enables the viewing and editing of original footage.

Unlike most Super-8 tables, the Steenbeck accepts up to 1000-ft. cores. If reels are used, the capacity is 600 feet. There is a footage counter, or a minute/second counter.

The sound reproduction is very good. It is unfortunate that recording heads and amplifiers are not part (or an option) of the machine. Recording capability would have made this a much better bargain and a much more useful machine.

A Super-8 picture module is available for use with the six-plate ST 6000 machine. The basic 16mm machine costs about \$8000.00 and the Super-8 picture module about \$1500.00. This module is also equipped with a mag/optical stripe reader for single-system film. Despite high quality sound, there are no mixing or recording provisions on this table either.

KEM

KEM offers two possibilities for editing Super-8 film. The first is in the form of a picture module (\$2400.00) that will fit the KEM Universal. The second is

the KEM Rapid-S six-plate table with Super-8/16mm interchangeable picture heads.

The Rapid-S (costs about \$8000.00 plus \$1500.00 for the Super-8 picture head) is a very basic editing machine. One lever controls the running speed of 0-100fps forward/reverse. The 24fps sync speed position is notched. Interlock in any combination is done via three light indicator buttons. The screen is a very bright 8.5"x11.5" (the largest around). Each track has its own separate frame counter and large inching knob. The film transport is fairly gentle. Film capacity is 1000 feet on a core.

The sound is of very high quality. Again, it would have been nice if both edge stripe and fullcoat recording capability had been designed in. At present, the Super-8 picture modules do not have single-system sound readers. KEMs are not available with Super-8 fullcoat tracks.

Moviola/Magnasync

At the moment there is nothing definite. The company did not respond to inquiries about forthcoming Super-8 editing equipment, but well-placed sources do indicate that a very fine four-plate flatbed, similar to the 16mm version, is under development. The ability to record on edge stripe and on the fullcoat track will be part of the design. It will also be the first "heavy" machine to shun 16mm fullcoat in favor of a straight Super-8 picture/Super-8 mag fullcoat arrangement.

It is interesting that these firms (Moviola possibly excepted) who pioneered the flatbed concept of editing, are not willing to carry their designs to the logical conclusion. Namely, complete in-house postproduction for Super-8.

Part of their approach must have to do with their own vision of Super-8's future directions. Their view seems to be cast in the mold of established 16mm and 35mm production techniques, even though Super-8 is clearly carving out a totally different niche. A niche that is essentially based on the premise "do it yourself".

Schmid:

Two editing tables from Europe, the Schmid and the Atema, do follow the in-house post-production systems to their logical ends. The Schmid Diplomat II is given as an example.


The Schmid Diplomat II at \$12,500.00 is fully equipped for both Super-8 and 16mm editing and mixing. Though available with Super-8 fullcoat tracks, the most logical configuration would be 16mm mag heads and Super-8/16mm interchangeable picture modules.

As a cutting table, the unit is set up for rapid and simple threading of all heads. The picture, rather than displayed on ground glass, is actually projected on a small screen and gives a much brighter and sharper image than conventional tables. By moving a tiltable mirror, the image can be projected onto a larger supplementary screen for group viewing.

In addition to the 24fps sync speed, movement is variable from 1-110 fps. Like all horizontal tables, the various tracks can be disengaged and run independently. Editing sound quality is very good, with little wow and flutter. The picture transport is designed to be harmless to film; enabling editing of original film. The picture head is equipped with edge stripe playback and recording heads.

If sound is to be recorded on the
Continued on Page 1340

NEW!

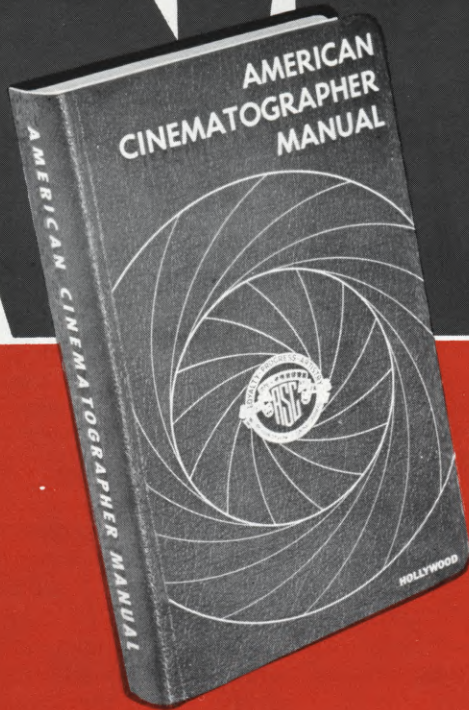

FOURTH EDITION

AMERICAN CINEMATOGRAPHER MANUAL

COMPILED AND EDITED BY
TWO VETERAN CINEMATOGRAPHERS

CHARLES G. CLARKE, A.S.C.
and
WALTER STRENGE, A.S.C.

MOST COMPREHENSIVE COMPILATION OF CINEMATOGRAPHIC DATA EVER PUBLISHED !

Completely updated Filter, Lighting and Lens sections. Data on most recent camera developments. Complete shooting data for Theatrical, Non-theatrical and Television cinematographers filming 16mm, 35mm or 65mm anamorphic or spherical motion pictures in any aspect ratio, in color or black and white, silent or sync-sound, in the studio or on location.

An Official Publication of the
**AMERICAN SOCIETY OF
CINEMATOGRAPHERS**

Dealers are invited to write for
quantity discounts.

This easy-to-carry, pocket-size, concise, book contains practical, informative text, tables, charts, diagrams, drawings and listings of all the latest production equipment and filming techniques in use today!

Key word printed on the edge of every right-hand page provides INSTANT INDEX for quickly locating desired data!

THE AMERICAN CINEMATOGRAPHER MANUAL

P.O. BOX 2230

4TH EDITION

HOLLYWOOD, CALIFORNIA 90028


Please send _____ copies of the AMERICAN CINEMATOGRAPHER MANUAL @ 18.50 each, postpaid. No C.O.D.'s

NAME.....

STREET.....

CITY.....STATE.....ZIP.....

California residents please remit 6% Sales Tax (\$1.13 per Manual). Foreign Buyers please pay by International Money Order or U. S. Funds.

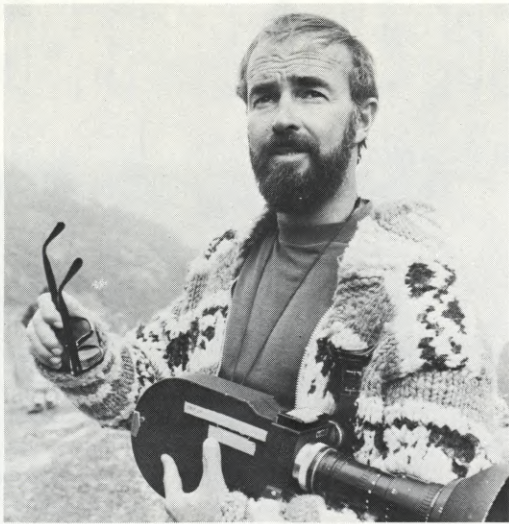

“A year and 70,000 feet of exposed film later, plus a lot of sand, snow, dust, cold and heat, and it’s still running beautifully.”


Producer-director-cinematographer Roger C. Brown, president of Summit Films Inc., has been using Eclairs since 1968, so when he began shooting his feature film, “The Edge,” his first choice for a camera was the ACL.

“The original reason I had for wanting an ACL was its weight, or lack of it, I should say. Every extra ounce really hurts when you’re climbing mountains or hiking down canyons. The ACL, with a 200 ft. magazine, is the lightest professional sync sound camera unit available. On top of this, it’s compact. I can put the whole thing plus extra rolls of film, an extra magazine, batteries, a light bag, and cables in one backpack and I still have a reasonable load.”

Brown’s film, “The Edge,” is no ordinary feature. It took him and his ACL on some of the most rugged film-making assignments ever faced by a cameraman and his equipment. In Yosemite Valley the camera went up and down vertical rock faces. In Aspen, Colorado, the ACL filmed all day at 20°F below zero with winds pushing the chill factor down another 10 to 20 degrees. Socorro, an island in the middle of the Pacific, is a birthplace of cyclones, and salt water and sand, blown by the high winds, penetrated the ACL but did not prevent it from running. The camera went up to 16,000 ft. on Mt. Kenya in Africa, facing everything from snow to hot equatorial sun. And a trip down the Grand Canyon produced more wind, sand, water and intense heat. Brown says he filmed several thousand feet at 75 fps in addition to the usual 24 fps, all with no problems.

If ruggedness isn’t enough, Brown adds that the lightweight ACL was so comfortable to hold that he would seldom put it down, even during rehearsals. “My arms never felt shaky even after holding the camera for an hour or more.”

Seventy thousand feet of film is a lot of film to put through a camera even under ideal conditions. For “The Edge,” the ACL was given the supreme test. As Brown comments, “I suppose the ACL isn’t perfect, but, as much as I have thought about it, I can’t suggest any improvements.”

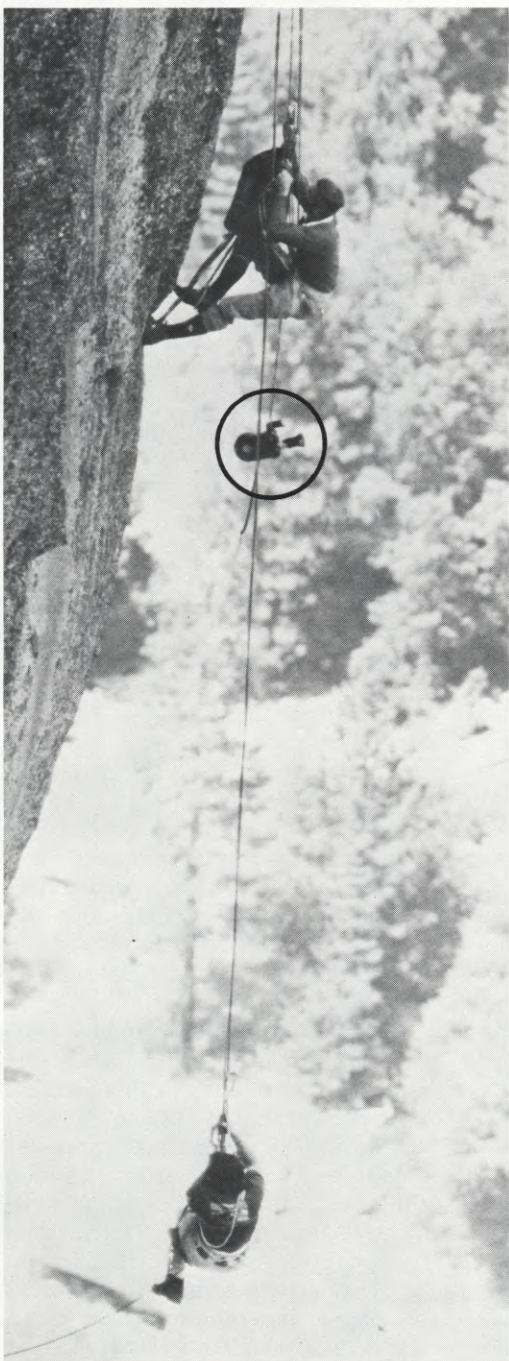

A remarkable camera and a remarkable cameraman — the Eclair ACL and Roger Brown.

ecam eclair

ECAM COMPANY • 6430 Sunset Blvd. • P.O. Box 3167
Hollywood, California 90028 • (213) 466-7301

Eclair® is a trade mark of Eclair International, France

CANADA'S LARGEST FILM LAB GOES INTO SUPER-8

A good deal of trial and error has led to methods of processing and printing Super-8 to achieve the optimum professional result

By MURRAY FALLEN

Since the inception of Super-8 in 1965, there has been talk of filming professional Super-8 original productions. One of the largest problems, in Canada at least, was the lack of Super-8 lab services. There were the odd services available, such as mag-striping and the odd cartridge loading centre capable of loading only one type of cartridge, as well as one or two photofinishing labs processing Super-8 cassettes. However, it wasn't until Bellevue Pathé started its Super-8 Division in 1969 that any hope for original production in Super-8 was even feasible.

Our initial goals were to provide reduction printing from 16 to Super-8, sound and silent, as well as cartridging and lubrication. We built a homemade printer consisting of a 16mm projector, Ektar lens, and a double Super-8 Pathé camera modified to accept 2,000 foot loads. The projector and camera were electronically synchronized and the end results were high-quality Super-8 release prints. The resolution was extremely good (as a matter of fact, I haven't seen better since). The main problem with this setup was the fact that the Pathé camera was not designed for large volumes, even with our modifications. The result was that we had to take the camera apart every hundred thousand feet or so to make minor repairs.

To provide sound on Super-8 we took a Kodak M100 projector and modified it to run in sync with the Ampex equipment in our Sound Dept. We were fortunate in that the Super-8 Division was part of the overall 16/35 lab and were able to take advantage of existing equipment, such as sound and processing equipment. The sound quality was reasonably acceptable but we did have a problem with the sync. Some cartridge projectors did not have the normal 18-frame sound advance. Therefore, we had to set up special syncs for nearly each different projector. At the beginning we didn't even have some of the projectors to properly check out our sync and had to ship out the prints, cross our fingers, and hope that the client wouldn't come back screaming. It worked most of the time.

We kept receiving inquiries about duplicating Super-8 original with promises

that we'd be millionaires if we put in the service. I couldn't take it too seriously, since these potential clients wanted only a couple of hundred feet duped and even I know that a few more feet was needed to make the first million. However, since we wanted to become a full-service lab, we would have to offer a complete line of services for Super-8.

We had an old Depue black-and-white printer that was set up for printing double Super-8 black-and-white. Since we were not doing this type of work and there was no demand, it was the obvious choice to modify for Super-8 duplicating. The modifications were relatively minor and, in no time, we were in the Super-8 duplicating business, providing an excellent product. At first we were using 7389 color reversal print stock and processing normal. We found that there was quite an increase in contrast with some originals so we tried a few experiments to help reduce the contrast. We ended up printing on 7389 and processing as 7242. This apparently gives us a better overall reproduction.

Now that we had Super-8 dupes under control we felt that we were offering a complete service. We could make internegs from dupes and go into release printing either from Super-8 or 16mm, both sound and silent. We could lubricate and load a variety of Super-8 cartridges, as well as striping Super-8 original and duplicates. What more is there for a lab to do?

Well it wasn't two weeks after we started duplicating that a client asked us about A and B rolls and title supers for Super-8 original. After I stopped laughing at the absurdity of this question, I thought to myself, "Why not." I'm used to doing the impossible, so what's one more task? The first problem is what to use for black leader since none was readily available. After numerous tests it was decided to fog 7381, process and slit it. This film unlike 7389 was black enough to hold back the light in the printer and we could produce it economically. Once we ironed out the problems of syncing up the A&B rolls it was just a matter of doing the job. We found that we could successfully print A&B rolls and super-imposed titles over live action. The titles are shot on Kodachrome II, white lettering over a black background,

preferably using Polaroid filters to obtain the optimum contrast, since the black had to hold back the light of the printer.




Now that we were offering a complete laboratory service for Super-8 original production we claimed that anyone could do professional production at a much lower cost than 16mm. We recommended the use of a double Super-8 camera for a number of reasons. The film is more economical than cassettes, since each roll contains 200 feet of Super-8. One can shoot for five minutes (at sound speed) without having to reload the camera. Since the camera has its own aperture plate, higher resolution and steadier pictures can be obtained. Dissolves of any length are possible. Ektachrome Commercial is available for shooting and this stock gives the best reproduction, especially when going through an internegative. Both Ektachrome Commercial and High Speed Ektachrome can be developed by most professional labs with or without force processing.

We tried to stay away from all types of hardware, such as synchronizers, rewinds, editing benches, etc. However, we did get caught up with editing benches. We started building small editing tables with Super-8 accessories. Since that was all that was available at the time it served its purpose, even though we weren't really crazy about the end result.



Thank goodness other manufacturers shared our optimism on Super-8 and decided to build professional high-quality equipment. We could now get back to the business of being a Super-8 lab and reap all the rewards (?) that go with it.

More and more people were beginning to involve themselves with Super-8 productions, but there was still an important service missing. We could not do optical effects such as fades, dissolves, freeze frames, reverse action, etc. Here we go again — trying to develop a piece of equipment to produce the desired effect. Since we had to start from scratch, we wanted to be able to incorporate all the effects presently available on 16mm (short of mattes) as well as reduce slides directly onto Super-8. Being a former ani-


Continued on Page 1336

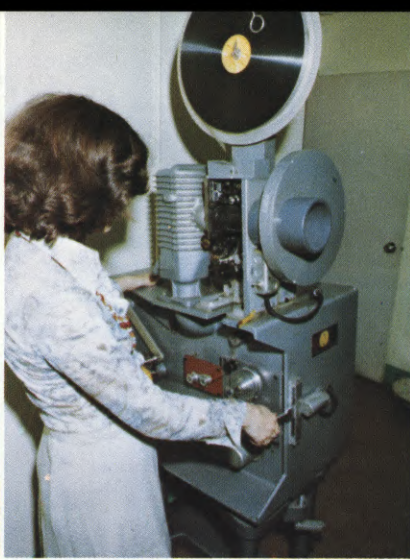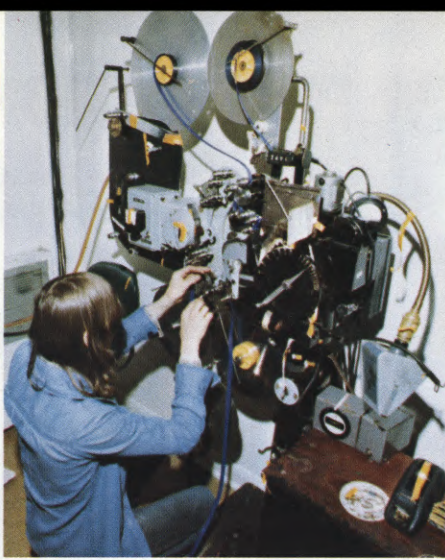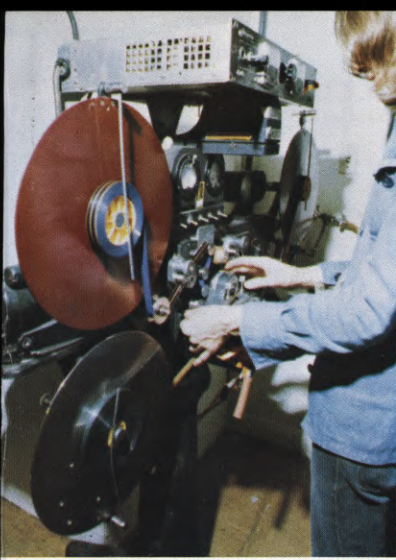

At Bellevue-Pathe Lab in Toronto, Murray Fallen and his colleagues use a variety of standard and modified equipment to provide many Super-8 printing services. (LEFT) A modified Depue single-strand printer is threaded prior to printing workprints and Double Super-8 internegatives. (CENTER) A converted 16mm printer is used for release printing Double Super-8 from internegatives. (RIGHT) Using a high-speed Double Super-8 projector, all processed film is screened prior to slitting.

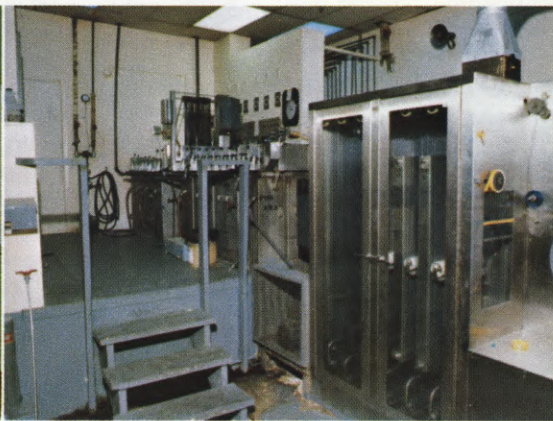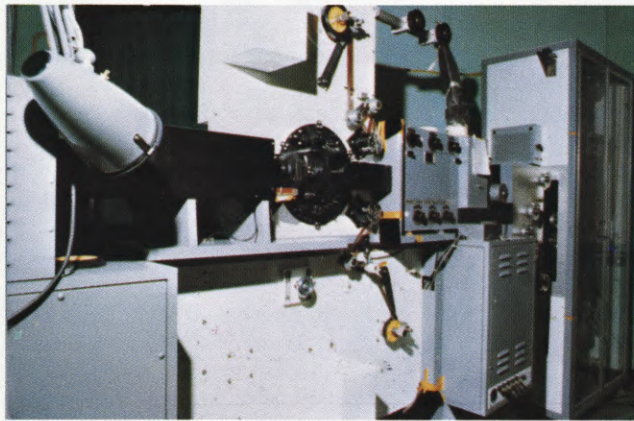


(LEFT) In operation at Bellevue-Pathe Lab, a HFC Super-8 panel printer makes high-speed Super-8 reduction prints at the rate of 200 feet per minute. (RIGHT) The Filmline processor is a positive processor for developing prints at 150 feet per minute. Laboratory services for Super-8, still in the formative stages, are continually changing. It is definitely a specialized service thus far, as compared to standard 16mm-35mm operations.

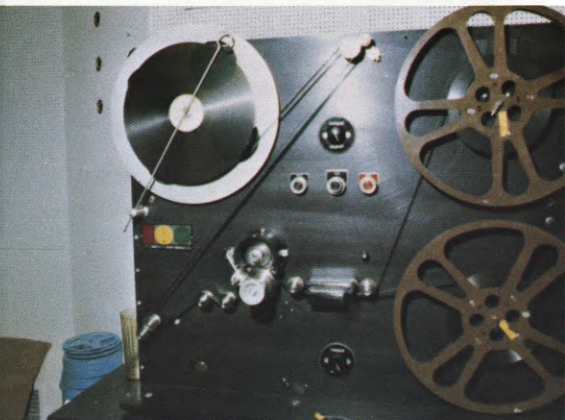

A Super-8 slitter, manufactured by the Hollywood Film Company, slits Double Super-8 to single strand. The Double Super-8 format offers low-contrast color reversal (ECO) and negative stocks not yet available in Cartridge Super-8.

Many of Bellevue-Pathe's Super-8 prints are screened in continuous-loop Super-8 cartridge projectors. Prints are lubricated in the machines shown here prior to loading the cartridges for smooth running of the film through the projector. Ultra-sonic cleaners are used to remove dirt, grease and other materials from the negatives before printing.

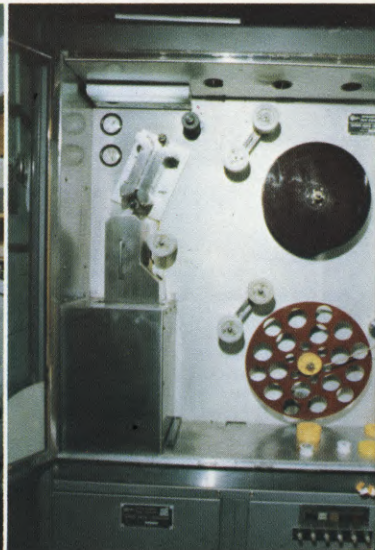

SUPER-8 VIDEO—A NEW PRODUCTION CONCEPT

By ROBERT O. DOYLE

"Super-8 Video" is a new concept in video production, utilizing inexpensive Super-8 film cameras as the original medium, and Super-8 editing, studio, and transfer equipment in post-production. Four factors combine to make Super-8 Video the lowest cost video production method:

- Super-8 cameras, with built-in single-system or external double-system sound recording facilities, are the least expensive means of original program production for video release or television broadcast. While there is a noticeable loss of picture quality, especially in the areas of picture resolution and image stability, the difference is easily detectable only on broadcast monitors.

- Super-8 editing equipment, with its capabilities for multiple sound tracks, and straightforward physical editing (cutting) at an exact frame, is the least expensive and most versatile means of editing an original production for video or television.

- Super-8 sound studio equipment, with up to three sound tracks and a sync control track on an inexpensive but high-fidelity four-channel tape recorder, is the least expensive means of sophisticated post-production sound for video or television.

- Super-8 television film chains, especially the extraordinary Kodak Videoplayer flying-spot scanner, are the least expensive means of transfer to video, or direct broadcast of film. The \$1350 Videoplayer replaces between \$10,000 and \$20,000 of conventional 16mm film/video transfer equipment, and a new external sync version will soon allow A & B roll transfers to video, with video special effects and live video camera inserts where desired.

Super-8 Video thus offers the video producer the lowest cost production and post-production techniques available, including color, sync sound, sound and picture editing, and multiple sound track capability. Super-8 Video offers all this, plus the extreme portability of three-pound cameras and lightweight cassette sync-sound recorders, or the new single-system Super-8 cameras that combine sound and picture recording in a single unit. Super-8 cameras go anywhere, operate on penlight or rechargeable batteries, and film in extreme low light situations (approximately 10 foot-candles) in full color.

TRANSFERRING SUPER-8 TO VIDEO

Transfers of Super-8 films to video can be accomplished

The extraordinary Kodak VP-1 flying-spot-scanner can replace a video camera and telecine projector in a Super-8 film chain, with much less capital investment. The video signal may be displayed on a monitor or taped on standard 3/4", 1" or 2" tape decks.



Several technical factors have combined to make Super-8 the lowest-cost video production method — opening up a vast new field of possibilities

using conventional film chain techniques, since AC-synchronous telecine Super-8 projectors are now available. This allows the use of image enhancers, electronic color correction, and other sophisticated video processing. Laboratories that specialize in film-video transfers are now offering these services, notably the National Video Center in New York City who have a Kodak TVM100A Super-8 projector as a permanent installation in their telecine chain.

Alternatively, transfers can be made with the Kodak Videoplayer, an inexpensive flying-spot scanner that converts Super-8 film to a standard NTSC color signal — 525 lines fully-interlaced composite video, with separate audio derived from the magnetic edge stripe or a fullcoat magnetic film recorder running in double-system sync. The Kodak Videoplayer is so inexpensive that most video production houses will acquire one just to keep open the option of accepting Super-8 color sound film as a source of material.

VIDEO EDITING OF SUPER-8 ORIGINAL

Although the double-system Super-8 sync editing equipment available today is by far the least expensive way to edit a Super-8 Video production, a video editor with access to sophisticated 2" quad editing equipment may prefer to transfer the Super-8 original film and sound directly to 2" quad tape for video editing. This practice is recommended by the Canadian Broadcasting Corporation study group that endorsed Super-8 as acceptable for broadcast on Canadian television (SMPTE Journal, April 1974).

An alternative to 2" quad equipment is SONY's new VO-2850 U-matic 3/4 inch Videocassette editing system. This relatively inexpensive video editing system and a Kodak Videoplayer (for inexpensive video transfers without tying up a color camera) are an attractive low-cost combination that many smaller television stations and cable companies will find fits well today's tight budgets.

However, video editing techniques are limited and would cramp the cinematographic style of most film editors, who might prefer to cut Super-8 film despite its small size, and then transfer to video.

HOW GOOD IS SUPER-8 ON TV?


Super-8 image quality — assuming use of the finest resolution film available in the Super-8 format, Kodachrome 40, and assuming camera lenses of the highest optical quality available — can achieve 100 lines per millimeter resolution. The Super-8 frame is 4.2mm high by 5.7mm wide, giving a horizontal resolution in excess of 500 lines, which is comparable to the finest 2" quad videotape equipment and to broadcast-standard resolution. By comparison, the 3/4" videocassette (U-matic) recorder has a horizontal resolution of only 240 lines, and the home video format of the future — Videodisc — is expected to have only 300 lines resolution.

There is, of course, a distinctive change in the video image quality whenever the original medium is film, rather than video camera or video tape. Characteristic differences between film and video in their dynamic contrast range, and associated color shifts, produce the familiar "film" look, as compared to the "live video camera" look. But this look of

Continued on Page 1324

For the cinematographer who shoots double system only...

our new CP-16R/DS model

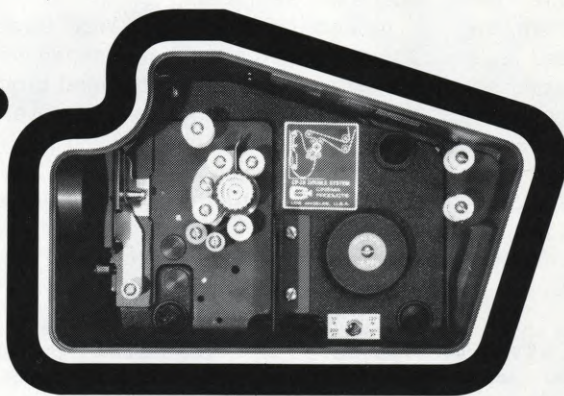

Our new CP-16R/DS camera model isn't all that new, of course.

For all practical purposes, it is the same field proven, lightweight, rugged and reliable CP-16R reflex—with its super accurate crystal controlled motor, and all the many features that have made it the most outstanding 16mm single/double system sound camera ever.


All we've done is remove the flywheel and film threading rollers needed for single system sound recording. Which makes our new CP-16R/DS model strictly "DS," i.e. double system *only*. Simpler and considerably faster to thread.

It also makes our new CP-16R/DS *almost*

three quarters of a pound lighter than our already extremely lightweight standard CP-16R.

So, whatever you're shooting: documentaries, newsfilm, TV commercials, etc.—if you shoot double system sound only, our CP-16R/DS is the perfect camera model for you.

And should your filming requirements ever change, it's good to know that we can easily convert your CP-16R/DS to single system/double system sound capability.



Standard CP-16R
(with 3XL-IAZ mag head)

For further information, please write to:

cinema E products
CORPORATION

Technology In The Service Of Creativity

2037 Granville Avenue, Los Angeles, California 90025
Telephone: (213) 478-0711 ■ Telex: 69-1339 ■ Cable: Cinedevco



SUPER-8 IN TELEVISION

On a long-term basis, professional Super-8 would seem like a viable alternative for meeting the challenge of Electronic News Gathering

By CHUCK CYBERSKI

Super-8 has always been somewhat of a pipe-dream for broadcasters suffering from the daily expense of 16mm operations. But interest in the small format reached a peak in the early seventies, when inflation began to erode 16mm budgets, and Super-8 manufacturers introduced sophisticated new silent cameras, such as the Beaulieu 4008ZM2. In a survey of US television stations conducted by Super-8 Research News at that time, 55% of the responding news directors voiced a solid interest in changing to Super-8 if given new and improved systems suitable for the job. Unfortunately for the format, the call was premature. The major link in the Super-8 system, the sound cartridge, was missing and years away. The opportunity quickly passed, despite the pioneering efforts of Geoff Williamson (Wilcam) to manufacture a professional Super-8 sound camera.

KDUB-TV, a small and relatively new UHF station in Dubuque, Iowa, clung to the idea, though, and in the summer of

1972 the station announced its decision to make a total commitment to Super-8 for both news and commercial production. After shooting 85,000 feet of Super-8 the first year, the station became the first in the country to prove significant savings could be realized through Super-8 — savings in excess of 50% in raw stock, chemistry, and equipment. Letters from over 35 countries around the world were soon pouring into Dubuque, and more than a dozen US stations initiated various experimental programs. However, an easy and economical method of recording single-system Super-8 sound was still missing.

In February 1973, the Wall Street Journal leaked word that Eastman was preparing a new Super-8 sound product, and that summer Kodak announced the important missing link in the Super-8 system, dubbing it the Ektasound cartridge. The announcement of the consumer product was followed shortly by a series of new

professional products destined for distribution by 1975: the Supermatic 8 processor, the VP-1 and VP-X video players, the Supermatic 24 XL camera and Supermatic 200 sound camera, and a rapid access news-film available in both 50' and 200' Super 8 cartridges.

Now, to the satisfaction of many of its die-hard supporters, Super-8 has started inching its way toward professional acceptance by a growing number of TV stations, but its real progress and potential have almost been totally obscured by another factor in television: ENG. ENG is the acronym for "Electronic News Gathering", the practice of using lightweight color video cameras and video tape recorders to "film" news events, and in some cases electronically relay them back to the station for instant viewing by portable microwave, or even simultaneous broadcast as in the case of the SLA shootout in Los Angeles.

In short, the classic film-tape debate has suddenly erupted into a real-life

The extreme color blow-up below shows a split-screen comparison between unenhanced 16mm film (LEFT) next to an enhanced Super-8 print. Both photos were shot from a TV screen. Enhancement makes the Super-8 appear sharper, though somewhat coarser and granier. The appearance of grain is normally increased with enhancement, but much of the high-frequency noise is lost in the home receiver. Electronic image enhancement has been the single most important factor in bringing the Super-8 image up to broadcast standards.




struggle between the traditional 16mm film cameras and the new ENG video cameras, virtually eclipsing the professional capability that Super-8 has finally attained. It's no exaggeration to state that the future of the entire film industry in television is at stake in the ENG movement; to measure the potential of Super-8 in television today requires a very careful examination of what's at the heart of the ENG-16mm debate.

ENG porta-pak costs are very close to 16mm SOF camera costs, but operating costs (raw stock) are incomparably lower than 16mm, even when some of the video tapes are archived. Additional ENG bonuses are the elimination of processing with the instant replay, and the capability of live transmissions from the scene. One popular ENG unit has been the Akai VTS-150; it's priced under \$7,000 and uses relatively inexpensive 1/4-inch video tape which can be reused many times. The hand-held camera weighs about 6 pounds and is umbilically tied to the 16-pound video recorder which is carried by a shoulder strap. The recorder is highly automated and trigger-operated from the camera. After every "video shot" the recorder automatically rolls back a few seconds and goes to a standby mode to wait for the next shot. This allows the reporter to make automatic add-on edits right in the field, much like the "editing in the camera" technique used with film. An electronic iris selects the proper f/stop in the 6x zoom lens, and the small electronic viewfinder with its bright television image doubles as a monitor for instantly checking the recording.

Not surprisingly, the ENG movement is sweeping through the broadcast industry with unprecedented interest and acceptance. Broadcasters attending the 1975 NAB show (National Association of Broadcasters) voted ENG equipment their number one priority on shopping lists, and stations like WCBD of Charleston, South Carolina, and KMOX of St. Louis, Missouri, gave glowing reports boasting of their total elimination of film. As one network news executive told affiliate managers, "The question is not whether you will get into ENG, but when." The goat was obviously 16mm.

In response to the challenge, Kodak recently introduced their long-awaited "Video-film", designed to reduce both processing time and chemistry costs. Cinema Products, the leading US 16mm camera manufacturer, has been outpacing Super-8 manufacturers with such camera innovations as multiple LED exposure indicators, bright fiber optic viewing screens, and built-in wire-

Super 8 Television Film Apertures and Safe Areas

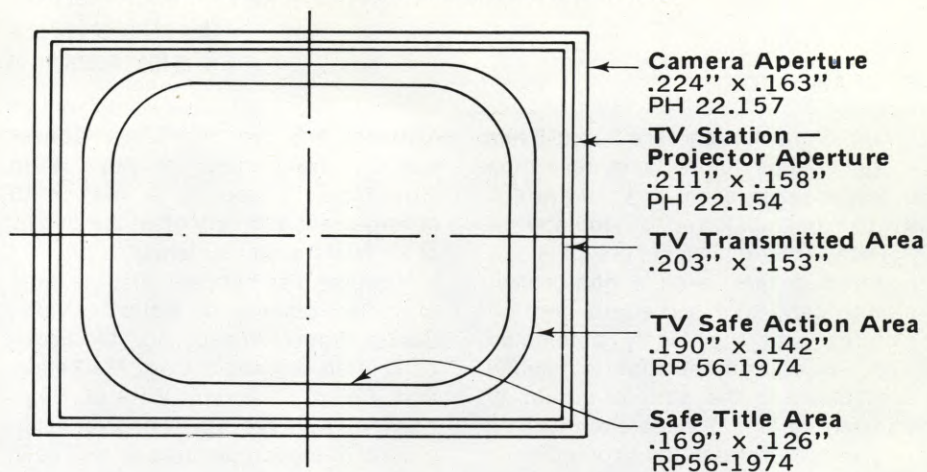

less microphones. But still, the scales are tipping heavily in favor of ENG, and it seems quite certain now that 16mm film and equipment sales to TV stations have reached their final peak.

Indeed, the future of film in television is at stake here, and the only format capable of competing with the innovations of ENG on a long-term basis is professional Super-8. A landslide of new professional products has just begun to hit the market, making Super-8 a match for ENG that should not be overlooked.

The key that finally unlocked the development programs was the Ektasound cartridge. The new 50-foot cartridge closely resembles the silent version, with the main difference occurring in the extended lower portion where there is a second aperture for the record head and capstan/pinch roller assembly. Complete compatibility in the upper portion of the cartridge allows conventional silent cartridges to be used in the new sound cameras.

Both silent and sound versions of the cartridge possess a host of features attractive to news reporters. The most basic and obvious advantage can be found right in the black plastic cartridge: it's a handy light-tight, fog-proof container for the film that allows instant loading under all conditions. The inert plastic also avoids a problem that has plagued the lightweight 16mm cameras: blue spots on the film caused by magnesium particles (Cinema Products recently sought to solve this problem by introducing plastic magazines for the CP-16).

In addition, both silent and sound cartridges contain speed notches which automatically program the camera for the proper ASA, and filter notches which control the Type 85 day-

light filter that is built into all Super-8 cameras. The cartridge label provides a convenient means for identifying news stories shot in the field, and the cartridges can be handled roughly with no fear of loose film ends unraveling and fogging the day's work. Kodak is currently supplying four types of film in the 50-foot sound cartridge: Kodachrome 40, Ektachrome 160, Ektachrome EF 7242, and Ektachrome SM 7244; the new multi-illuminant Type-G Ektachrome and Ektachrome 7240 video-film are under consideration. Available in the silent cartridge at the present are all of the above, plus Ektachrome 40 and Ektachrome Type G.

The real significance of the Ektasound cartridge lies in the new generation of compact sound-cameras it has fostered. Kodak operated a dis-

The Kodak Supermatic 200 sound camera accepts the new 200-foot cartridge of pre-stripped Super-8 film, as shown here. The camera also uses the 50-foot sound cartridge now widely in use.



Continued on Page 1324

TRANSFERRING SUPER-8 TO VIDEO

One of the areas in which Super-8 would seem to have a great future is in the recording of events to be transferred later to videotape

By ALAN ROGERS

One of the areas where Super-8 has a tremendous future is in recording events in color, silent or sound, which will then be transferred to videotape.

Today, for an investment of a few hundred dollars, even a non-professional can take excellent motion pictures with the highly automated Super-8 equipment that is readily available, and the state-of-the-art of transferring film to videotape makes it very easy to release the production in videotape, either for broadcast telecasting over the airwaves, or for use on cable television or other closed-circuit viewing.

Super-8 film as an originating medium for final release on videotape has been facing the same "chicken-and-egg" problem as it faced in the film print areas. Here it was difficult to get labs and other post-production services to invest in the equipment and related services to make prints of professional quality and at competitive prices until there was a high volume of work, and there could not be a high volume of work until the services existed!

The same situation pertains in the video end of Super-8 filmmaking today . . . most videotape houses with broadcast-quality equipment able to transfer Super-8 film to 2-inch broadcast-quality videotape do not have enough of this business to warrant mounting a Super-8 projector per-

This color correction console at National Video Center allows an infinite range of color corrections in either 35mm, 16mm or Super-8. The unit can make frame-by-frame color and density correction of film going into and coming out of dissolves, where two pieces of film require correction of each frame.

manently into their film chain. Consequently, the transfer of Super-8 to videotape is usually a makeshift arrangement and very often the quality of the final transfer suffers greatly.

However it so happens that the three executive officers of National Video Center, Robert Weisgerber, the President; Alan Rogers, V.P. of Marketing, and Philip Mancino, V.P. of Engineering, all have an extensive background in motion pictures as well as in videotape, which is unique for a video service company.

Because of their interest, experience, and faith in the future of Super-8 film and videotape, they have installed a Kodak TVM 100 Super-8 telecine projector permanently in their broadcast-quality filmchain island.

They can transfer Super-8 film to any format of videotape, 1/2-inch, 3/4-inch videocassette, 1-inch or 2-inch Quad videotape. They can transfer the sound either from the magnetic stripe on the side of the Super-8 film, from a Super-8 fullcoat recorder (Super8 Sound Recorder) or from a 16mm mag track in interlock.

Many television broadcasters and CATV operators have installed Super-8 projectors in their telecine chains, often as a temporary lashup for occasional use. Others, avoiding the need for modifying existing telecine equipment, project the Super-8 films onto a small white or gray screen to pick up the optical images with a live television camera that can be mounted into position on a dolly in their studio. If care is taken, you can obtain television transfers in this manner, but the quality will be quite low.

The next step up in obtaining better quality Super-8 film-to-tape transfers is to use a small Multiplexer unit whereby you can project Super-8 film directly to a color television tube. With a unit like this you can put your television camera into position when you want to transfer film to tape, and it can be taken out and used for other purposes the rest of the time. This way you do not tie up a color TV camera the way you would have to do if it had to be permanently fixed to the Multiplexer.

The telecine chain at National Video Center is a most complete and complex unit for transferring film to videotape. It has several film projectors and a 35mm still photo projector feeding into the

unit, and has a high-quality video camera dedicated to the telecine chain work.

National Video recommends transferring camera original Super-8 film to 2-inch Quad Videotape, and then to do all the editing electronically, with scene-to-scene density correction and color correction.

Kodachrome 40 is the best film to shoot for maximum sharpness in Super-8, even though it has inherently high contrast and is not a good film to shoot with if you want film prints to be made. The density can easily be controlled electronically.


A problem in using Kodachrome is that it is still considered an amateur film by Kodak, and they develop it with less controls than they develop their 16mm Ektachrome films. The result is that once in a while you get a critically important roll back with developing streaks, water marks, dirt, or other problems which are not noticeable to most amateurs, but which are ruinous to a person trying to use this format of film for professional purposes.

Kodak does make a low-contrast Ektachrome 7252 available in 100-foot rolls of Double Super-8, and this film does get developed in the same bath as their 16mm Ektachrome 7252. While it does not give as sharp an image as the dye-structured Kodachrome, it is still quite sharp and gives very good results when transferred to videotape, where it will only be shown on a 26-inch TV screen at most.

A note of caution here to Super-8 filmmakers . . . film shot at 18 fps CAN be transferred to videotape, BUT ONLY with a flying-spot scanner video-player such as the Kodak VP-1 or VP-X. The problem is that, as yet, not too many video houses have this unit, and if you have film shot at 18 fps and want to transfer it to 2-inch Quad videotape for broadcast use, *it cannot be done with any of the conventional high-quality broadcast telecine chains!* If in doubt, shoot at 24 fps . . . for then you can have it transferred by both the VP-1 or the conventional telecine cameras . . . the slight amount of film you save is not worth the price you may have to pay later when you find you have a great production, and a television station is willing to pay good money for it, but it cannot be transferred!

If possible the Super-8 film should be ultrasonically cleaned after all



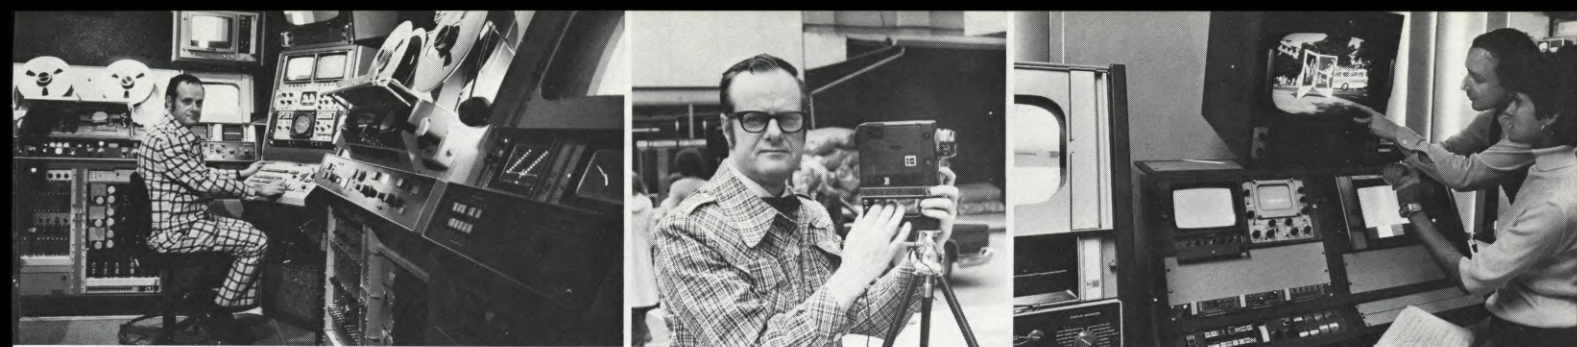

(LEFT) Alan Rogers, V.P. of Marketing for National Video Center, operates the video switcher, as the final editing and special effects are done on the hour-long production of the International Ballet Competition in Bulgaria. It was shot on Super-8 Ektachrome with a Nikon R-10 camera and transferred to 2-inch quad tape by NVC. **(CENTER)** Rogers operates the new Kodak Supermatic 200 Super-8 single-system sound camera. The film shot was transferred to 2-inch quad tape, given electronic editing and color correction, plus a multiple sound mix, and ended up as a highly professional TV spot. **(RIGHT)** Bob Weisgerber, President of NVC, explains Super-8/videotape transfer to producer Zeida Cecelia-Mendez.

editing is finished, and as close as possible before the time of the telecine transfer. The startmarks for picture and Super-8 mag tracks should be the same as in 16mm and should be in editorial sync. Splices should be of the mylar type, like the HPI Quik Splices, as they are extremely thin and less liable to cause the projector to jump while being projected. *This is particularly important because a video house charges by the clock, and if the film projector jumps because of one of your splices, and the film has to be run back to the beginning, YOU PAY FOR THAT TIME!*

Many people run up unexpected expenses because they do not have their Super-8 film and sound material properly prepared for the videotape transfer. It is extremely important to always check with the video house that is going to do the transfer and find out all their requirements and recommendations for the preparation of your material. This could save you hundreds of dollars and could also save you from missing an all-important deadline.

One of the leading Super-8 producers in New York City is Zeida Cecelia-Mendez. She is an ex-dancer who is now producing television commercials and documentaries for the Spanish-speaking markets in the United States.

This year she shot sixty Super-8 rolls of High Speed Ektachrome 160 with a Nikon R-10 camera at the International Ballet Competition in Carna, Bulgaria.

Professional photographers using 35mm and 16mm movie cameras were not allowed to film this festival, but the festival did allow it to be shot in "amateur" Super-8!

Zeida shot the whole festival with the hand-held Nikon and recorded sound wild with a small portable Sony tape recorder . . . a one-person production team!

She had the film developed by Kodak in Fairlawn, N.J. It was then edited by the Super-8 Film Group of New York City (one of the country's leading production and post-

production companies). They also synced up the sound track shot in Bulgaria, mixed in new voiceover narration, and also put in a new music track. The final sound was four-track, two music tracks to achieve cross dissolves, a sound effects track and a narration track.

They then took the edited Super-8 film and mixed audio track (the latter being on fullcoat Super-8 mag stock) to National Video Center, and it was all transferred to two-inch Quad videotape. She finished with a 60-minute quad tape of the highest television broadcast-quality which was aired on the National Educational Network in New York in August.

There was a wide variation in the color and densities of the Super-8 film, but this was easily adjusted when being transferred to quad tape with the use of the automatic density unit on the National filmchain, and with the use of the computer-controlled Color Corrector designed by National earlier this year.

Another very interesting Super-

8/video job that was done at National Video Center was a 60-second commercial for the State Capital Savings Bank. It was shot the day before Christmas of 1974 on high-speed Super-8 Ektachrome 160 by Gunther Hoos and Mark Mikolas of the Super 8 Film Group of New York City. It was shot on Super-8 film because the client only came to them the day before Xmas with the final concepts for the commercial, and it had to be on the air 3 days later!

Because of union holidays all the 35mm and 16mm labs were closed, and the only way to have film processed was to shoot in Super-8, and have it processed by a small non-union lab that was open over the holiday season.

There was no time to even try to get a workprint made, and so they had to edit their sound-track against the original Super-8 film. They edited in A & B roll and did a three-machine video mix at National Video Center in order to obtain dissolves in the final tape transfer.

Continued on Page 1350

Phil Mancino shows Zeida Cecelia-Mendez how the National Video Center Color Corrector works. Her Super-8 footage of the International Dance Festival in Bulgaria, after transfer to 2-inch quad tape with automatic density control, image enhancement and color correction, resulted in a final quad tape of high broadcast quality.



the 'head' man



AT THESE NCE DEALERS

Camera Mart

456 W. 55th St., New York, N. Y. 10019

Victor Duncan

676 St. Clair St., Chicago, Ill. 60611

Victor Duncan

11043 Gratiot, Detroit, Mich. 48213

Victor Duncan

2659 Fondren Dr., Dallas, Texas 75206

Galaxy Film Service

3000 France Ave., Minneapolis, Minn. 55416

Alan Gordon Enterprises

1430 N. Cahuenga Blvd., Hollywood, Calif. 90028

Helix

679 N. Orleans, Chicago, Ill. 60610

Oscar H. Hirt, Inc.

41 N. 11th St., Philadelphia, Pa. 19107

Mobius Cine Ltd.

7 E. 47th St., New York, N. Y. 10017

Photomart

6321 S. Orange Ave., Orlando, Fla. 32809

Export Distributor

Cinecraft International

11 Caesar Place, Moonachie, N. J. 07074

Erwin Harwood, the genius product-designer-president of NCE is best known for his 'heads'. Seven of them. His patented line of Hydrofluid tripod heads can't be equalled for creamy smooth movement. Starting with a 4½ pound lightweight wonder that will support your lightweight wonders (up to 20 pounds), to a 30 pound MASTER that can turn a 150 pound monster into a pussy cat.

And NCE is not just THE source for Hydrofluid tripod heads. There's a unique cradle Gear Head, really great Hydrodollies, and innumerable tripod adaptors, bases and cases. But don't take our word for all these NCE wonders. Visit one of our dealers and see for yourself or write for literature to the head man, Erwin Harwood.

nce

national cine equipment, inc.

4140 Austin Blvd., Island Park, N.Y. 11558



Tel: (516) 889-4600

a complete 16mm lab



ORIGINAL DEVELOPING
ECO, ME4, GEVACHROME
B&W REV, B&W NEG

PRINTING

WORK PRINTING
—SAME DAY
ANSWER PRINTING
PDD PRINTS (FRAMELINE)
CLEAN PRINTS FROM ECN
INTERNEG/CRI/RELEASE
GEVA 9.02 SILVER TRACKS

SOUND

RCA OPTICAL TRACKS
ELECTRO-PRINTING
RECORDING, TRANSFERS
MIXING, E.O.

TITLING

VIDEO TO FILM
TRANSFERS

PEERLESS TREATMENT

SUPPLIES

EDITING, ANIMATION
3M MAG FILM 16 & 35

332-350 GOLDEN GATE AVENUE
SAN FRANCISCO 94102
PHONE (415) 775-3664

LEO DINER FILMS, INC.
Since 1947

SUPER-8 LABORATORY SERVICES AND STOCKS

Continued from Page 1270

Moonachie, N. J., is now supplying Takita Printers, for Super-8 original stocks, including Optical Printers, Contact Step Printers, and Continuous Contact Printers.

Most labs are processing Super-8 in their 16mm processing equipment. Only recently have processing equipment manufacturers turned their attention to special requirements for the processing of Super-8 original, e.g. the Jamieson Compac Model S. If Super-8 film becomes widely used as an original production medium, especially outside the U.S., in the developing countries, there will be an increasing demand for Super-8 processors.

Eastman Kodak has anticipated this market, and the need for rapid turnaround processing of Super-8 in the U.S. for television news applications. They have announced a new fully-automatic processor and a new film stock intended for use with the new ES-8 process.

The Supermatic 8 Processor can be loaded in daylight with any Super-8 cartridge (50 foot, 200 foot, and special 400 foot cartridges). The processed film, ready to project, emerges 13 1/2 minutes later (50-foot). The machine needs only sources of water and electricity, and a drain. Chemicals are added from prepared packages, and the processor automatically maintains chemistry quality. When chemicals are exhausted, the machine disposes of them, cleans itself, and calls for new chemicals before it will restart.


The Supermatic 8 processor can at present process only a single emulsion, the new Kodak SM 7244, which is available in 50 foot and 200 foot silent and sound cartridges. The price of the Supermatic 8 processor is \$12,500. About 10-20 Super 8 cartridges per day will amortize such a capital outlay, over a few years' period, by comparison with typical commercial processing costs.

Since Kodak hopes that much Super 8 film will be transferred directly to video using their new flying-spot scanner Videoplayer, the combination of the automatic in-house processor and video as a release medium may limit the growth of a truly large volume Super-8 business for motion picture laboratories.

(ABOUT THE AUTHOR: Richard Lerman is an independent filmmaker, composer of electronic music and writer. He teaches at the Boston Museum School of Fine Arts and is co-owner of the Super-8 Workshop, a film school and production house in Cambridge, MA.)

Brooks CAMERAS

Where you can expect **QUALITY** and **SERVICE** at no increase in **PRICE**

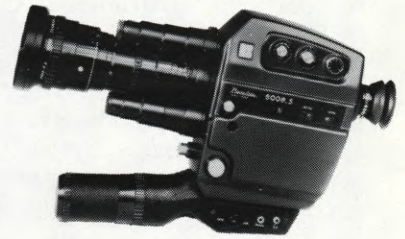

Beaulieu

Super-8 SOUND!

You Also Get:
FREE 16-Hour Photo Course.
FREE Multi-Risk Extended Guarantee.
BANKAMERICARD AND
MASTER CHARGE CARDS HONORED.

SAN FRANCISCO
45 KEARNY STREET
392-1900

ZOOM LENS REPAIRS



ANGENIEUX

And other fine lenses
SUCH AS CANON, ZEISS
SCHNEIDER AND
PAN-CINOR

WHY GAMBLE?

THERE IS NO SUBSTITUTE FOR EXPERIENCE, AND CENTURY PRECISION OPTICS HAS MORE ZOOM LENS REPAIR EXPERIENCE THAN ANY OTHER FIRM IN THE WORLD. OUR CUSTOMERS INCLUDE SUCH EXACTING CLIENTS AS CBS-TV, ABC-TV, NBC-TV, N.A.S.A., ETC. HUNDREDS OF FILM PRODUCERS, LARGE AND SMALL, MANY FROM FOREIGN COUNTRIES, HAVE SELECTED US TO REPAIR AND SERVICE THEIR ZOOM LENSES. SO... WHY GAMBLE? ... AT CENTURY EVERY LENS JOB IS HANDLED BY EXPERTS, EFFICIENTLY AND PROMPTLY. OUR PRICES ARE OFTEN LOWER THAN LESS EFFICIENT GENERAL REPAIR FIRMS. WE OFFER EMERGENCY REPAIR SERVICE IN AS LITTLE AS 8 HOURS! SEND YOUR ZOOM LENSES TO US FOR SERVICE OR REPAIR TODAY. FREE ESTIMATES. INQUIRIES WELCOME.

ESTABLISHED 1948

Century Precision Cine/Optics

1661 BURBANK BLVD. NORTH HOLLYWOOD, CALIFORNIA 91601 (213) 766-3715

a complete super 8 lab



ORIGINAL DEVELOPING
ECO, EFB, B&W REV
E160, E160G FORCE 1

PRINTING FROM S8 ORIG.
WORK PRINTS
TIMED PRINTS
A&B ROLL PRINTING
GEVACHROME 9.02 PRINTS
INTERNEGS, ECO MASTERS
COLOR POS RELEASE
ON PRE-STRIPED ESTAR
CONTACT & REDUCTION

SOUND
TRANSFERS, DUBBING
RESOLVING SYNC CASSETTES
TO S8 FULL COAT

PEERLESS TREATMENT

CARTRIDGING

SUPPLIES
EDITING, ANIMATION
SUPER 8 FULL COAT

TITLING

332-350 GOLDEN GATE AVENUE
SAN FRANCISCO 94102
PHONE (415) 775-3664

LEO DINER FILMS, INC.
SINCE 1947

SUPER-8 VIDEO — A NEW PRODUCTION CONCEPT

Continued from Page 1308

film is the same whether the original film is 16mm or Super-8. With a crisp Super-8 original, with image enhancement as is generally used for 16mm film transfers, and with electronic color correction, it is extremely difficult to distinguish Super-8 from 16mm in off-the-monitor tests reported in the SMPTE Journal, and shown in this issue of *American Cinematographer* in the article by Chuck Cyberski.

KODAK SUPERMATIC FILM VIDEOPLAYERS

The Kodak Super-8 Film Videoplayer replaces an entire conventional telecine film chain — including telecine projector, optical imaging system, and color video camera — at a price about one-tenth the lowest-cost 16mm film chain. It does this with a device known as a flying-spot-scanner.

The Videoplayer moves Super-8 film continuously (no intermittent motion) past an aerial image of a small TV screen. The screen has no picture on it, just a gray raster-scanning pattern. The image of the screen is the same size as a Super-8 picture frame, and falls directly on the film. If the image could be seen in microsecond time intervals, it would appear to be a small spot (the image of the spot where the electron beam falls on the TV tube phosphor), raster scanning back and forth across the Super-8 frame. Thus the name "flying-spot-scanner". Three photomultiplier detector tubes (Red, Green, Blue) on the other side of the film measure the color of the spot from moment to moment and convert the result into a full NTSC standard composite color signal. There is no color camera.

The Kodak Videoplayer is an enormous engineering breakthrough that expands the options of a Super-8 film producer to include video distribution of his films as well as normal projection. A combination of a Super-8 film production system and a Kodak Videoplayer is the lowest cost independent video production system with color, editability, and extreme location portability.

KODAK FILM VIDEOPLAYER VP-1


The VP-1 accepts Super-8 film, color or black/white, sound or silent, on standard Super-8 reels or automatic-loading Supermatic cassettes (400-ft. maximum — 20 minutes). It operates at 24fps or 18fps, and converts the Super-8 picture film into a standard color television signal that can be displayed on an ordinary color television receiver or a color monitor. Sound is derived from the magnetic edge stripe of a single-system film, or from Super-8 fullcoat magnetic film being played back in synchronism on a double-system sync recorder (Super8 Sound Recorder).

Kodak Videoplayer controls include still-frame capability, framing adjustment for still and running frame, a vertical steadiness adjustment/blue/red tint control, and focus.

RF signal outputs are channels 2 or 3. A switch is provided to select between the Videoplayer or the VHF antenna of an ordinary color TV set. Video signal output is fully interlaced (525 lines) NTSC composite video, with a separate audio. These signals are suitable for display on a color TV monitor, or recording on a videotape recorder.

KODAK FILM VIDEOPLAYER VP-X

The VP-X has the same specifications as the VP-1, except that it has no RF-modulated output, and it is equipped to accept external synchronization for use in broadcast situations, or where a large video system is run on system-wide "station sync". The external sync inputs include burst flag, composite blanking, vertical drive, composite sync,

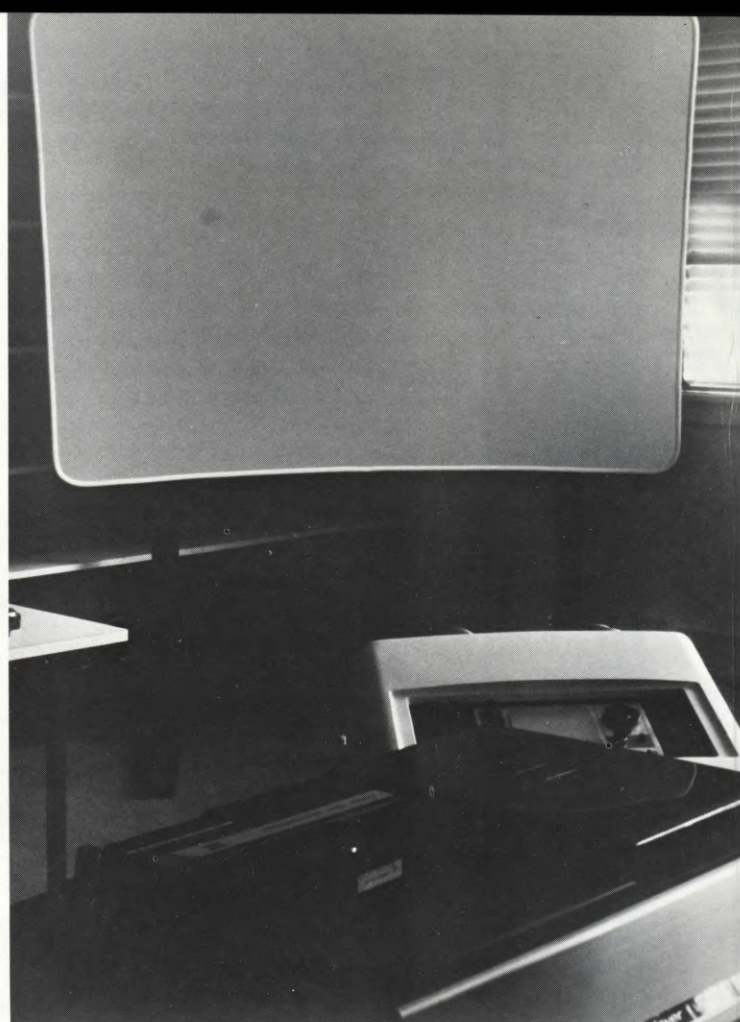

The Advent VideoBeam is a unique color television projection system that produces an 87" diagonal picture on a special Ektalite screen. In conjunction with the Kodak VP-1 Videoplayer or videocassette players, the VideoBeam can be an important part of an in-plant video distribution system, since a very large audience can simultaneously view the program.

horizontal drive, and color subcarrier (BNC connectors). The outputs are composite video 1-volt peak-to-peak across 75 ohms (BNC connector), and a 600-ohm unbalanced audio signal (RCA phono jack). Signal/rms noise ratio is a greater than 37dB. Horizontal resolution is 240 lines (color). No time-base correction is required. A number of VP-X Videoplayers can be synchronized to one another using an external color sync generator, a distribution amplifier, and a phase shifter to control tint variations between Videoplayers.

A video switcher or special effects generator can select between the videoplayers, live video cameras, or video tape recorders with time-base correction, and the result can be directly broadcast or recorded on a master videotape.

Because the Videoplayers do not transport the Super-8 film in frame-for-frame sync interlock with the external sync signal (only the video raster scan is in sync), precise A & B rolling is impossible. The switch from the "A" roll to the "B" roll cannot be guaranteed to occur on a specific frame. Super8 sound of Cambridge is working on a servo-control sync interlock system for the VP-X that will permit such precise switching between A and B rolls, and allow the switch points to be programmed electronically.

Super8 Sound was among the small group of eight dealers selected by Eastman Kodak to receive the first Videoplayer franchises. We modify all the Videoplayers we sell to include a standard 1/F sync pulse signal, suitable for synchronizing a fullcoat magnetic film soundtrack. This permits highest fidelity double-system audio/video transfers using the Super8 Sound Recorder. ■

DESIGNED FOR A TEXAS RANCH HOUSE



The Advent Videobeam colour television projection system, originally designed for the super luxury American home is now available on hire from Samuelson Sight & Sound Ltd. for conferences, exhibitions, medical education and a myriad of other more prosaic uses.

The Advent Videobeam projection system gives a 6 ft x 4½ ft colour picture so bright that it is clearly visible under normal lighting conditions by up to 100 people. In addition to receiving normal off-air (PAL) TV-transmissions the Advent Videobeam can also be used in conjunction with Sony U-matic or Philips cassette recorders to play back tapes recorded in either the PAL or NTSC systems, or to relay pictures directly from colour and b&w TV cameras.

If you would like to see the Videobeam in operation or would like more information on SS&S's enormous range of audio-visual presentation equipment which includes 35 mm, 16 mm and 8 mm cine projectors, multi-screen slide projectors and all types of PA equipment, just ring Alan Howe or John Boness on (01) 452 8090.

**SAMUELSON
SIGHT
AND SOUND
LIMITED**



A MEMBER OF THE SAMUELSON FILM SERVICE FAMILY OF COMPANIES

303/315 Cricklewood Broadway, London NW2 6PQ. Tel: (01) 452 8090. Telex: 21430. Cables: Samcine London.

SUPER-8 SOUND RECORDERS
Continued from Page 1265

deck. The record-reproduce electronics are available in monophonic and stereophonic versions. The Super-8 fullcoat head assembly is manufactured by Crown to Super8 Sound specifications. Each Lab Recorder is supplied by Crown biased and equalized for recording on Super-8 fullcoat magnetic film, with calibrated frequency response test charts.

The Super8 Sound Laboratory Recorder consists of three components — the fullcoat transport, record/reproduce electronics, and sync electronics. A portable case is available, but the three components are designed for rack-mounting in standard 19-inch racks.

With its one-hour running time, the Lab Recorder can do transfers to the longest available Super-8 film loads — 1200 feet. This length facilitates double-system sync transfers from Super-8 to video with no need for intermediate stops on even the longest

slows down or speeds up the Recorder capstan speed (negative feedback). The changes made in the capstan speed contribute no detectable wow or flutter. The error signal itself is displayed on a visual sync indicator meter, so the operator can monitor sync conditions at any time.

Synchronism between the rate of mag film sprocket holes and a "master" rate set by the external sync reference, (camera, projector, etc.) is accomplished by matching up "master pulses" from the sync reference to "slave pulses" from the mag film sprocket holes one by one. For example, each frame of film exposed in the camera has a corresponding master pulse derived from the 1/F contact switch in the camera. For each master pulse there will be one, and only one, slave pulse coming from a mag film sprocket hole passing the head of the Super8 Sound Recorder, when the Recorder is in sync.

Any speed "error" in the Super8 Sound Recorder is detected and measured by a digital logic device



The Nizo S560 and Philips 2209 sync cassette recorder make an inexpensive and lightweight location rig. Camera and recorder may be crystal-controlled with the addition of external crystal boxes.

known as a "flip/flop". Each master pulse turns the flip/flop to its "on" state, and each slave pulse turns the flip/flop "off". If the recorder is slow, as assumed, the average time the flip/flop is on will be increasing. The average "on" time of this flip/flop is an error signal which can be fed back into the motor of the Super8 Sound Recorder, creating a closed servo "loop", with the following property of stability at the correct master pulse rate:

If the Recorder runs slow relative to the master sync pulses, the average voltage from the flip/flop increases, speeding the Recorder up to the correct speed.

If the Recorder runs fast relative to the master sync pulses, the average voltage from the flip/flop decreases, slowing the Recorder down to the correct speed.

It follows that the Super8 Sound Recorder cannot run at any speed but that which matches slave pulses to master pulses. The Recorder is said to be "slaved" to the external sync reference. If any small tendency to run fast develops, the servo sends a "slow down" error signal back around the negative feedback loop to the motor; if any tendency to run slow appears, feedback of the error signal speeds up the Super8 Sound Recorder.

Negative feedback and the principle
Continued on Page 1328


The Uher CR134 recorder records extremely high-fidelity stereo sync sound on cassettes. The sound quality compares favorably with that of cassette recorders with Dolby noise reduction. The addition of a crystal sync generator makes possible sync use with crystal-controlled cameras.

video cassette.

Super8 Sound Recorders are not sprocketed machines. They interlock with other sync equipment by servo-electronic speed control employing negative feedback. The rate of sprocket holes passing the magnetic head is sensed photo-electrically by a light-emitting diode and photo-transistor. This rate is compared to whatever sync reference rate is desired (camera, 60Hz pilotone, quartz crystal, AC line frequency, recorded sync signal, projector, etc.). If the Super8 Sound Recorder rate is too fast, or too slow, an error signal is generated that

The XSD Recorder, based on the Sony TC153-SD cassette recorder with Dolby noise reduction circuitry, has internal crystal sync, as well as the capability to synchronize with cameras equipped with the standard pilotone output. A companion XSD Resolver is available for transfers of the sync sound to 16mm fullcoat magnetic film.



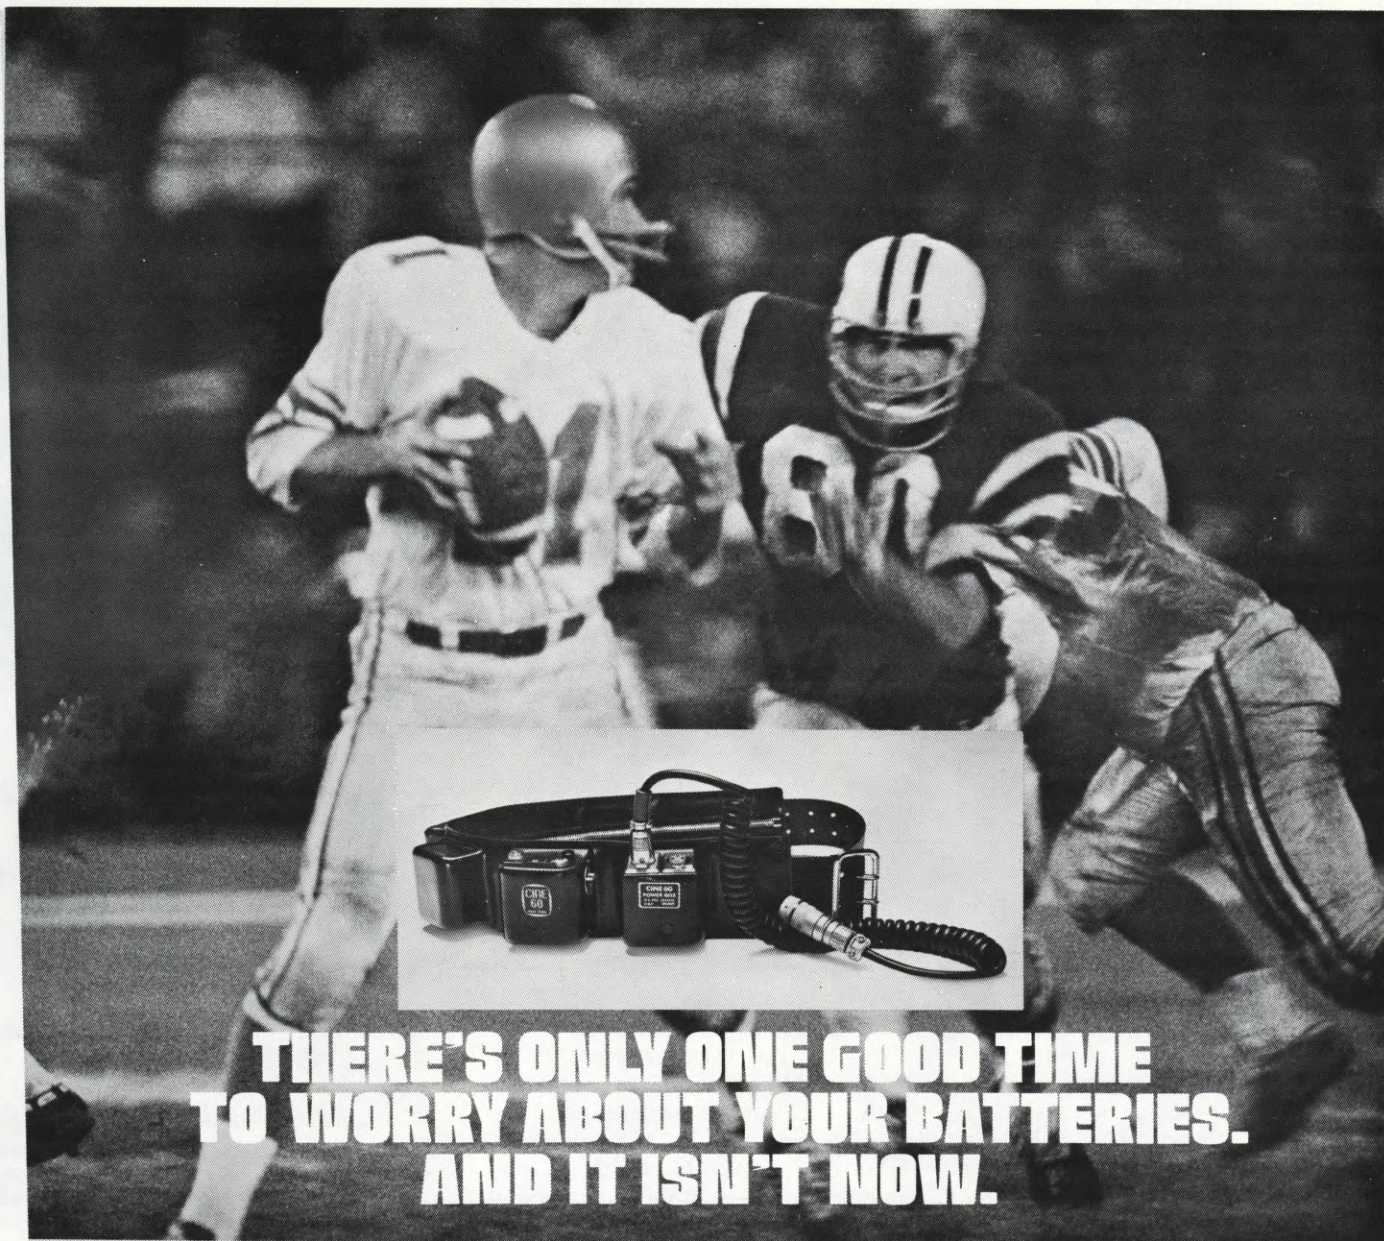

**THERE'S ONLY ONE GOOD TIME
TO WORRY ABOUT YOUR BATTERIES.
AND IT ISN'T NOW.**

Many things on location happen only once. And if you don't get it, you've had it.

So portable power doesn't just have to be portable. It has to work. And work. And work. As hard as you do. And wherever you happen to be.

One way to be sure is to become a beast of burden. With a bunch of heavy extra batteries pulling your pockets out of shape, and slowing you down. Or, a big, bulky pack that gives you all the mobility of the Golden Gate Bridge. But is it worth it?

There's a simpler, more dependable, and much more comfortable solution. Connect your camera (any professional camera) to a Cine 60 Power Belt. The rechargeable nickel cadmium batteries are arranged in

perfect balance around your waist. Leaving you relatively free to jump, climb, ride, fly, or do whatever you have to do to get your shot.

And you *do* get your shot. Because the Cine 60 Power Belt delivers 6 to 30 volts of reliable power for up to 7 ampere-hours. It can be recharged quickly and safely at any 110- or 220-volt AC outlet. There's a reassuring little signal light to tell you you're getting the charge you think you're getting. And an automatic, built-in safety switch to protect you and your camera from a shock you'd never think of getting.

Since it was introduced over a decade ago, more professional filmmakers depend on the Cine 60 Power Belt than on any other port-

able power supply. And if that isn't one hell of a powerful endorsement, we don't know what is.

Cine 60 makes other motion picture equipment that helps prevent other kinds of crises. There's a battery-powered fiberglass blimp for Arriflex 35 cameras... unique, lightweight single-and-double-shoulder pods... motor-drives for Angenieux, Zeiss and Canon zoom lenses... suction-activated platform and car mounts for shooting at any angle... all kinds of special connectors and camera/lens mounts for all kinds of cameras... and all kinds of helpful information, because we've been there, and we can help. With custom designs and repairs as well. All you have to do is ask.

CINE 60
INCORPORATED

Film Center Building/630 Ninth Avenue New York, N.Y. 10036/Tel: (212) 586-8782

CRYSTAL-SYNC SUPER-8

Continued from Page 1267

non-sync use. In addition to cableless crystal-sync work, the recorder can be cable-connected to pilotone cameras. Cables are available for standard Tuchel (Arri, Bolex), Canon XLR (Eclair), and BNC (Beaulieu) connections.

The 60Hz crystal pilotone appears on the left channel (track 1) when the input selector is on "mic" and there is nothing plugged into the left channel microphone input jack. A pilotone cable plugged into the left channel overrides the crystal tone with the camera sync tone. Level is adjustable to compensate for a wide range of pilotone input voltages (.4V to 4V rms).

The XSD Recorder has Dolby B noise reduction encoding and decoding circuitry. Location tapes can be transferred to fullcoat magnetic film while still encoded for Dolby noise reduction. Successive generations of sound can also remain encoded, up to the stage of mixing with another sound track. Dolby Noise Reduction Adapters are available for use at the mixing stage.

Resolving to Magnetic Film

The XSD Recorder has a built-in capability of self-resolving. The 60Hz pilotone signal can be matched to the AC 60Hz line frequency for transfers to magnetic film on sprocketed synchronous dubbers. This requires the use of the optional XSD Resolver Unit. Write Super8 Sound for a list of labs equipped with the XSD Recorder and XSD Resolver, and who can transfer sound to 16mm or 35mm fullcoat magnetic film. Transfers to Super-8 fullcoat do not require the XSD Resolver, since the Super8 Sound Recorder can match its speed to the 60Hz pilotone signal. An alternative method of resolving is to transfer selected passages to a quarter-inch pilotone recorder, and


have your sound lab resolve from quarter-inch.

The XSD Resolver is intended for use by labs and production houses with AC-synchronous magnetic film recorders. The Resolver plugs into a 110-125V AC 60Hz line source. It accepts the 60Hz pilotone from track 1 (left channel) of the XSD Recorder, and delivers a servo-electronic speed control signal to the special speed control input jack of the XSD Recorder. The original 60Hz tone on the sync track of the Recorder is compared to the 60Hz AC line source and the speed of the XSD Recorder is automatically adjusted to maintain sync.

A sync meter on the front panel of the XSD Resolver displays the sync condition. The automatic servo speed control can be set so that transfers of tracks made with pilotone cameras will not change speed in those sections where the camera was stopped. A speed-range control adjustment is provided on the front panel. With this adjustment it is possible to capture and lock on original pilotone signals that were $\pm 10\%$ from the nominal 24fps. Screwdriver adjustment is provided for still larger speed corrections, if necessary.

XSD Recorder Specifications


Frequency response 30-15,000 (CrO₂). Signal/Noise ratio with Dolby OFF — 48db, with Dolby ON 53db at 1KHz, 58db at 5KHz. Wow and Flutter 0.15% NAM RMS. Bias Frequency 105KHz. Pilotone separation 36db. Crystal accuracy, ± 1 frame in 13 minutes, -10°C to 40°C (50ppm stability over temperature range). Power DC 6V/8W (4D cells or NiCad battery pack), AC 110V/12W. Size 23.8cm x 37.8cm x 10.8cm (9-3/8" x 14-7/8" x 4-1/4"). Weight, 5.4kg (12 lbs) with batteries. Microphone input, 1/4" phone jacks. Line input/output, RCA phone jacks. Sync output nominal 1V RMS 60Hz, RCA phono jack. Low

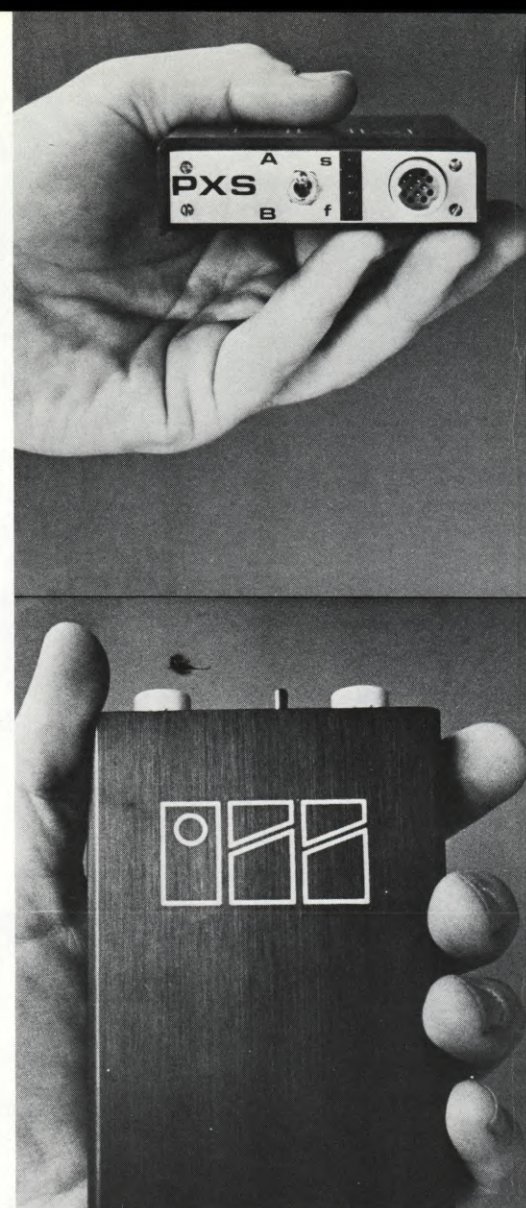

Inner Space Systems' recently introduced Model PXS is a pocket-size, economical Cine-Slave for crystal-controlling modified cameras. Their Model PX, the same size, is a crystal oscillator suitable for recording a 60Hz pilotone sync signal on the track of any two-channel recorder.

impedance stereo-phone monitor output. Microphone sensitivity, 0.2mV at 200 Ω . 60Hz standard pilotone sync pulse on cassette track 1 (left channel). Speed control input: special power connector to XSD Resolver. ■

The Super8 Sound XSD Recorder with XSD Resolver. The XSD Recorder has a built-in capability of self-resolving. The 60Hz pilotone signal can be matched to the AC 60Hz line frequency for transfers to magnetic film on sprocketed synchronous dubbers. This requires the use of the optional XSD Resolver Unit.

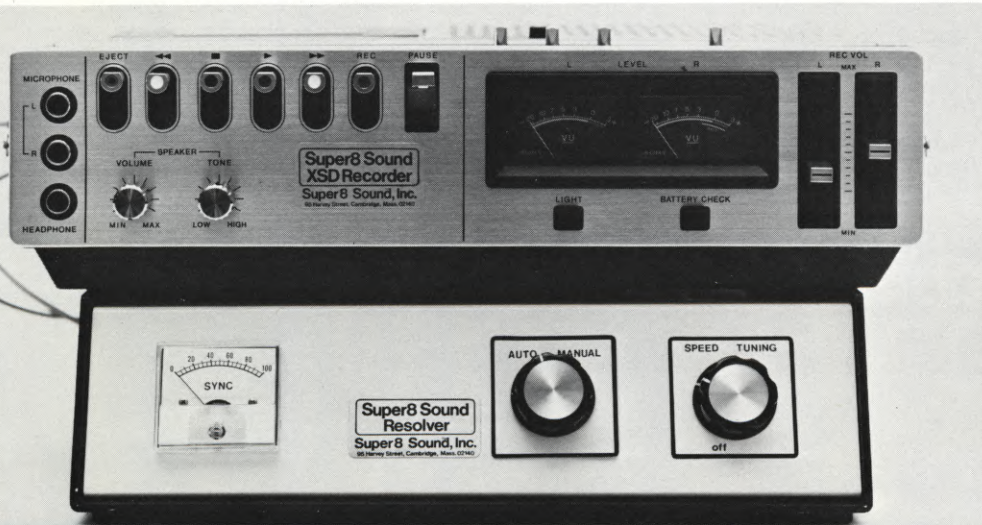

(ABOUT THE AUTHORS: JON ROSENFELD and AL MECKLENBURG. Rosenfeld is a former physicist who joined the staff of the MIT/Leacock Super-8 project at its inception. He holds the U.S. patent for the MIT Super-8 System. Mecklenburg was an engineering undergraduate at MIT when the Leacock project began, and worked with Rosenfeld on the design of the system. He has made several films and worked as soundman on segments of "An American Family", some of which was shot on Super-8 using the MIT equipment. Filmmakers themselves, they bring a practical combination of engineering and film production experience to the design of Super-8 gear.)

DEVELOPMENT OF SUPER-8
Continued from Page 1283

screen. A facility of this kind has a number of attractive features — it can be set up in the studio where the program producer or director has direct control of Super-8 film inserts in the same way as all the other studio facilities; perhaps even more important, the rear screen projection concept can be extended easily to provide multiple projection facilities and optical mixing of the projector light beams. With such an arrangement optical effects such as lap dissolves and superimposed titles could be produced with only a single television camera.

To simplify and speed up the processing of Super-8 camera film, especially for television news purposes, Eastman Kodak has introduced the Kodak Supermatic 8 processor, designed for operation in an office environment. Features of this highly automated, compact processor include cartridge loading of the film, easy operation, simplified handling of liquid concentrate chemicals, and a dry-to-dry time of 13½ mins. This machine is designed to process the new Kodak Ektachrome SM film 7244.

In the early stages of Super-8 development, attention was concen-

trated mainly on meeting the needs of the anticipated mass market for low cost prints with magnetic sound tracks and projectors to handle these materials in the simplest and most convenient manner. It was expected that these prints would be made by optical reduction from 16mm or 35mm originals, and that there would be little demand for printing from Super-8 originals. Many motion picture laboratories have facilities for printing from Super-8 originals, including the insertion of simple optical effects, and where prints are needed for distribution, this is the obvious route to take. Within the past few years significant improvements have been made in the films needed for the print process, and the equipment being used to make the prints. One factor limiting progress in this direction is the pressure to keep costs for prints as low as possible, while unfortunately the amount of time needed to make one or two prints from a half-hour Super-8 film is likely to exceed that for a comparable 16mm operation.

Some film users look to Super-8 as a means for reducing production costs. In fact this is a short-sighted attitude to take. While it is true that, minute-for-minute, Super-8 is far less expensive than 16mm, this is by no means its

most important feature. Super-8 is a new medium, and we have yet to learn how to exploit this new medium most effectively. The concept of low-cost mass-production for home and school use is a most alluring prospect, but it depends for its success on the acceptance by the public of the Super-8 film format as a communications and entertainment medium. Until there is a demonstrated large-scale demand for Super-8 prints by home and educational users, the mass production and distribution concept cannot be fully realized.


The cartridge projector incompatibility referred to earlier has no doubt been a major factor in limiting the growth of the Super-8 release print market. Significant technical strides were taken by Eastman Kodak and various film laboratories to lower the cost of Super-8 prints, including methods for mass producing Super-8 prints, complete with magnetic sound tracks, at 40 times sound projection speed. This was accomplished by optical reduction of a 16mm color original to produce four rows of Super-8 frames on a 35mm internegative, and then making the prints on a special 35mm material with four rows of Super-8 perforations and four pre-stripped

Continued on Page 1334

"LIQUITECH" Wet Gate

Engineered for its Liquid Environment!

Conceived by John Lewis to meet the critical standards of optical effects printing, "LIQUITECH" is the first wet gate with a film movement designed specifically for the fluid environment. Its patented registration system passes film vertically through the wet chamber thereby preventing the creation of turbulence common to modified fixed pin wet gate film movements. "LIQUITECH" guarantees accurate registration for color separation and matte work.

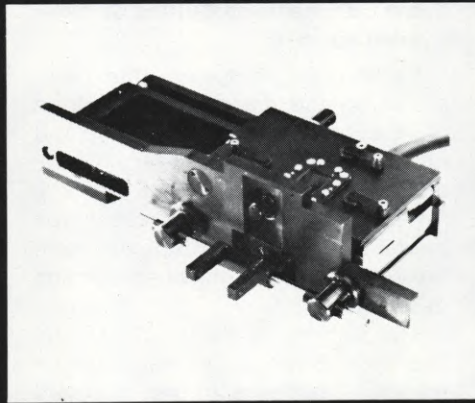

"LIQUITECH" accommodates stop motion speeds, high speed (when run dry), freeze and skip framing, forward, reverse and splices without damage to film or crown glass.

The film movement is hinged to provide wide area access to load film and easily clean.


Available for 35mm, 16mm, Super 8 and 8mm. It is easily interchangeable with dry shuttles. Super 8 and 8mm operate from existing 16mm cams.

The "LIQUITECH" Support System is gravity fed to eliminate the trapping of air; fluid is recirculated through a 1 micron filter. "LIQUITECH" gates can also be used with most existing support systems.

The most satisfactory unit in use, "LIQUITECH", has proven itself in optical houses and laboratories throughout the world.

Super 8 operates from 16mm cam!

Phone or write for more information.



Photographic Equipment Service, Inc.

695 Main Street

New Rochelle, New York 10801

(914) 235-2720

DOUBLE- AND SINGLE-SYSTEM SUPER-8 SOUND CAMERAS

Continued from Page 1261

most cassette recorders.

Five or six other camera manufacturers have now built single-system cameras and it appears likely that most will eventually do so. These cameras are much more sophisticated than the Kodak Ektasound, and some, like the Beaulieu, are clearly aimed at professional Super-8 applications. Some run at 24fps, accept 200-ft. sound cartridges, have manual gain control, headphone sound monitoring, and advanced lenses.

Cinema Beaulieu 5008S Sound Camera

The Cinema Beaulieu 5008S Sound Camera is in many respects the standard against which all other Super-8 cameras, silent or sound, are measured. It has the finest Super-8 lens of any camera, the magnificent C-mount Angenieux 6-80mm f/1.2 (T/1.4). The well-known Schneider 6-66mm Macrozoom lens is also available as an option at a much lower cost. The 5008S is both a single-system (stripe) sound camera and a double-system sync camera, since it has both pilotone generator and 1/F sync contact switch accessories. It has been made quieter running (about 3dB) than the 4008 and has a much improved handle structure, but its run switch is difficult to operate compared to the 4008. The long telephoto and the awkward controls demand that this camera be used on a chestpod or tripod, to produce steady images.

The 5008S is strongly recommended for TV News operations, as a prime camera in beginning sound filmmaking classes, and as the most generally useful Super-8 camera.

As a sync sound recorder, the Beaulieu 5008S is superb — actually superior to the Scipio and Philips 2209 sync cassette recorders in most respects. The viewfinder exposure needle switches over to become a VU meter needle for precise manual gain adjustments. Automatic gain control is also included. A high impedance headphone (2000 Ω) is necessary for monitoring. Sound specifications: Three inputs — microphone (.15mV), 50-5000 Ω , line 1 (3mV, 100K Ω), and line 2 (30mV, 500K Ω); Monitor output (subminiplug, 1.5K Ω impedance); Frequency response, 50-12,000Hz \pm 1.5dB; Weighted Signal/Noise Ratio, 57dB (amplifier electronics only);

Wow and Flutter, 0.4%; Bias, 60KHz; Distortion at maximum 0.75%; OVU-10dB below track saturation.

The Kodak Supermatic 200 Sound Camera is an improved version of the Kodak Ektasound camera made by Eastman Kodak's Motion Picture and Audiovisual Markets Division. It runs at 24fps, accepts the 200 ft. sound cartridge, has manual gain control, and headphone sound monitoring. Like the Ektasound cameras, it is noisy and has a relatively low quality lens.

The inexpensive Sankyo XL40S Sound Camera list price is less than the Kodak Supermatic 200's, yet it has 24fps speed, 200-ft. sound cartridge capability, and its f/1.2 lens has a 4-to-1 zoom and macro focusing. In tests at Super8 Sound, the Sankyo was found to be the quietest running Super-8 camera of any yet measured.

Bolex has put their longest zoom lens (8-to-1) on a single-system sound camera called the Bolex 580. They also have an XL version of the camera with a 5-to-1 zoom lens, the Bolex 550XL. Unfortunately, both of these cameras run at 18fps only.

There are many other single-system sound cameras on the market, and they are described in the accompanying data table. Many more are in the works at various manufacturers. We saw prototypes of several at *Photokina*, '74. For example, Anton Wilson described the Agfa-Gevaert Movexoom 10 Sound camera in his article in the December, 1974, *American Cinematographer*.

Some Comments on Cutting Single-System Super-8

Cutting single-system film with sound on the magnetic edge stripe has the drawback that the sound and picture are displaced from one another by 3/4 second (18 frames). An editor/viewer with a mag stripe reader is essential with single-system footage to make the best cutting decisions.

The Minette is the brightest and sharpest Super-8 viewer on the market. Teeth are in the standard position at the rear for proper editorial wind. A built-in pressure plate keeps the image in focus even when not winding. A single-system sound reader attachment is available for the Minette.

The Elmo 912 is a single-system viewer, with a larger but dimmer picture than the Minette S-5. Teeth are at the front and the viewer is therefore not compatible with standard Super-8 synchronizers.

Accessories are available for counting frames and cleaning film.




Several manufacturers have recently introduced tape splicers that leave a space in the area of the magnetic edge stripe, allowing cutting of single-system original film. The Guillotine splicer (a plastic version of the best-known professional film splicer) cuts sprocket holes and cuts a shortened piece of tape on the sound track side, to avoid covering the magnetic edge stripe. Two recently introduced splicers use prepared splices and apply them fully automatically so that fingers, editing gloves with little hairs, dust, etc., never get near the sticky side of the tape. The HPI Quik-Splice Super Splicer and the less expensive Herculix Minette Tape Splicer work this way.

Filmmakers should realize that it's very difficult to get intelligible sound when pulling Super-8 film by hand. No one as yet manufactures a motorized sound editor/viewer, but single-system versions of the Super8 Sound Editing Benches, the MKM Editing Tables, and the Super-8 Research Associates Post-Production Consoles are available. These allow both single-system and double-system editing.

It is also possible to edit single-system by eliminating the 18-frame sound and picture separation with a displacement recorder. The Moser Displacement Recorder will pick up the sound from the 18-frame advance position and rerecord it on the edge stripe in "editorial sync" (immediately next to the corresponding picture). When picture is cut, the accompanying sound is also cut. After editing, the Displacement Recorder replaces the sound on the edited footage at the normal 18-frame advance position for projection or transfer to video.

If you want to keep in touch with the rapid pace of new introductions of Super-8 equipment, write to Super8 Sound, Dept. JBM, 95 Harvey Street, Cambridge, Mass., 02140 for copies of the Super8 Sound Catalog (\$2), and the Reference Book Super-8 (\$15), a comprehensive compilation of original manufacturers' literature and data sheets on Super-8 cameras, recorders, and post-production equipment. ■

(ABOUT THE AUTHOR: JULIE MAMOLEN is the National Sales Manager of Super8 Sound, Inc. Her background was in computer systems and design of the Wide-Area-Telephone-System at AT&T. She and Bob Doyle have studied all the sync sound Super-8 cameras on the market and have designed various integrated production systems based on most of them.)



Why NOT shoot your NEXT VIDEO TAPE IN MEXICO?

Whether you are shooting documentaries, features, educational films or commercials, NOTIMEX, Mexico's finest facility for video tape production, offers you a unique team of experienced personnel and services at prices that will surprise you with their economy!

Our performance record proves we can do the job quickly, professionally and at substantial savings.

We offer you:

- A complete mobile unit · 2 PCP-70
- Norelco color cameras AVR-2 · Ampex recording
- Steenbeck editing tables · Motion picture & T.V. lighting · Own microwave.

2 Full Electronic News Gathering Systems and T.B.C.



Insurgentes Sur No. 1700,
México 20, D.F., México.
Tel. 524 11 65 · 524 16 65

super 8 color correction!

NATIONAL VIDEO
proudly announces
the ultimate
in Film-Tape
color correction.

Film-To-Tape conversion of ALL film aspect ratios, in Super 8, 16mm or 35mm, including panning and scanning of wide screen films.

Now over 100 computer controlled color corrections can be achieved (no tabbing or notching of film), and single frame events can be accomplished for dynamic control of film density and colorimetry.

The system includes forward-backward telecine operation, special visual effects, title burn-ins, color backgrounds and audio sweetening.....all enclosed in a single Kodak type television preview room environment.



**National
Video Center**
the TAPE house for FILM people!

730 Fifth Ave., New York, N.Y. 10019
(212) 757-6440


SUPER-8 IN TELEVISION

Continued from Page 1311

closure program to manufacturers several months before the official Ektasound announcement, and as a result of that, Beaulieu of France was the first manufacturer to deliver a truly professional Super-8 sound camera. Beaulieu's lead came in part from his own research which the company had been conducting on the Super-8 sound problem for several years.

The Beaulieu 5008S Super-8 sound camera carries an impressive set of manufacturer's specs: a frequency response range of 50 to 12,000 Hz \pm 1.5dB @ 24 fps; distortion at less than 0.75%; a signal-to-noise ratio of 57dB (amplifier electronics only), and wow and flutter below 0.4%. Angenieux's contribution to the camera was a record-breaking 13-to-1 f/1.2 power zoom lens. Coupled with the camera's mirrored shutter that delivers all of the lens light to the film, the 5008S gives amazing results in 6 foot-candles with any high-speed Ektachrome stock.

The electronics in the 5008S allow total automation in sound filming if desired. At the flick of a switch a servo motor swings into action to control the iris, and an automatic level control rides gain on the audio. Of course, manual exposure and audio control are also possible, and in these modes the camera's viewfinder needle acts as both a VU meter and exposure indicator. As with all cartridge sound cameras, the solid-state amplifier is built right into the camera, and allows for a choice of input levels, in addition to a monitor output for earphone or headphone. Like earlier Beaulieu models, the camera can handle an ASA range of 10 to 400, but running speeds are understandably limited to 18 and 24 fps for sound filming. One of the first stations to begin using the new Beaulieu for TV news reporting was

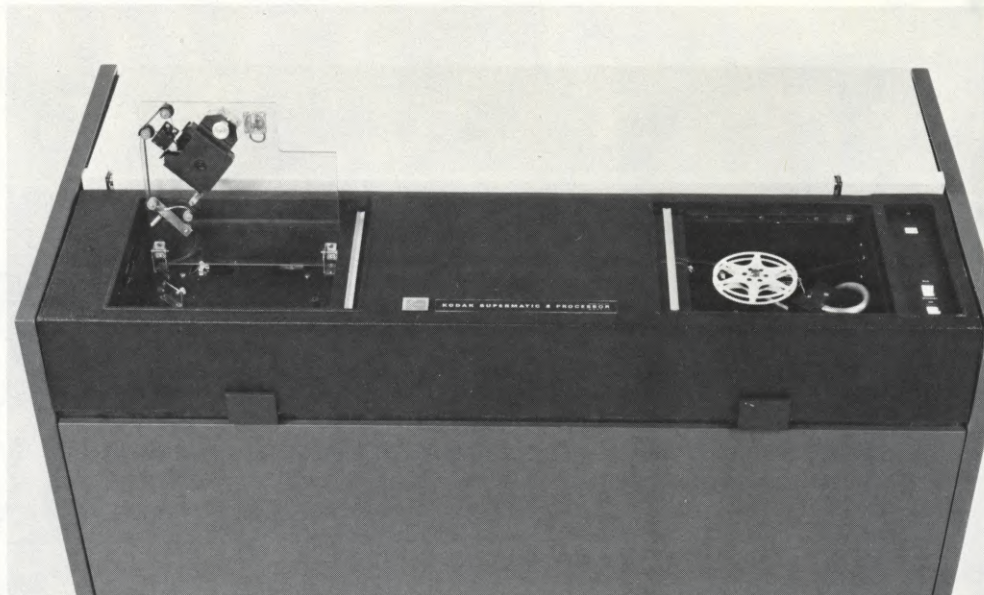

The Kodak Supermatic 8 processor, announced November 1, 1974 by Eastman Kodak Company, features cartridge loading of the new Kodak Ektachrome SM film, 7244, in 50 and 200-foot cartridges, as well as in 400-foot darkroom-loaded cartridges. The processor has a dry-to-dry time of 8½ minutes. Developed film is wound onto a reel at the opposite end of the machine and is ready for projection.

KHGI in Kearney, Nebraska.

Another company that has been closely involved in the development of Super-8 magnetic sound since 1965 is Eumig, an Austrian electronics and manufacturing firm that is well known for its sound projectors. Earlier this year Eumig introduced their new sound camera, the 30 XL. Eumig has traditionally favored viewfinders filled with information indicators, and the new sound camera is no exception: a green LED is used to indicate audio modulation, while a red LED is used to warn of possible underexposure. Off to the right of the viewfinder screen is a moving arrowhead which indicates film advance; this arrowhead turns to a bright red approximately 20 seconds before the 50-foot cartridge runs out, allowing a reporter to plan accordingly. Still another viewfinder innovation is the filter indicator (sunlight or tungsten bulb) which lights

momentarily at the beginning of each shot to remind the cameraman of what type of light he has the filter set for. Features like these, and the camera's auto-exposure system and automatic level control are what make Super-8 such an attractive, fool-proof tool for gathering news under adverse conditions. And the camera's price (approximately \$350) makes it ideal for news stringers.

The Eumig's single running speed of 18 frames per second raises the age-old question of the quality of this slower speed. The 18 frames per second rate translates to a linear stripe speed of 3 inches per second — still substantially faster than the 1-7/8 inches per second of the Phillips audio cassette. David L. Carr of Eastman Kodak recently delivered a technical paper to the Society of Motion Picture and Television Engineers documenting the

Continued on Page 1352

(LEFT) Film chain at KDUB shows the Kodak TVM100A Super-8 TV projector used with an RCA color TV camera. The projector's automatic threading has proved to be very reliable. (RIGHT) Editing Super-8 at KDUB, using the Wilcam sound editor and Bolex hot-splicer. Note the "seconds" counter on the left side of the editor. In 1972, KDUB-TV in Dubuque was the first station to announce a total commitment to Super-8 for both news and commercial production.



Century 300mm 12" f/4.5

A SUPERB TELE-ATHENAR TELEPHOTO LENS

\$249⁵⁰



- RESOLVES SHARPER THAN IMPORTED f/5.6 LENSES!
- ANTI-REFLECTION COATED
- VERY LIGHTWEIGHT 24 OUNCES!
- FULLY COLOR-CORRECTED
- TRUE 12 POWER!
- MADE IN THE U.S.A.!

Sold with a 30-Day Trial Period and Money Back Guarantee.

Specifications

Weight	24 oz.
Iris diaphragm	f/4.5 to f/32
Length	13 inches
Maximum diameter	2 1/2 inches
Focus range	Infinity to 30 feet
Field of view, degrees	2.4
Resolution	110 lines per mm

Accessories

Long lens shade	12.50
Gel filter slot (see back cover)	38.00
Sunshade/filter adapter combination	18.50
Filter: Series VIII	14.50
Case, Tubular	14.50

Arriflex mount, standard	44.50
Arriflex SSBL. New style stainless-steel heavy-duty bayonet lock type.	98.00
Eclair CA-1 mount . CP-16R	68.00

These lenses helped make possible some of the world's finest scientific and wild-life movies! They have been used to make superb animal and bird scenes that you may have seen on your local screen. You can make those exciting movies too! Excellent for sports, scenics, candid, insurance surveillance, documentary and scientific films.

We guarantee these lenses to be much sharper than comparable still camera lenses which are sometimes adapted to movie cameras. This is because our lenses are designed for 16mm cameras only. Still camera lenses are designed to spread their image over a larger area and cannot do a professional quality job on 16mm film which will be projected hundreds of diameters.

The iris diaphragm stops down to f/32. All glass-air surfaces are hard coated. Precision focusing mounts. Lenses are supplied in our standard "C" black Dural mount for Bolex, Auricon, Bell & Howell, Beaulieu,

The logical light-weight tele-photo companion to the 12-120 zoom lens (this lens brings your subject more than twice as close).

Distributed only by

Century Precision Cine/Optics

10661 BURBANK BLVD. NORTH HOLLYWOOD, CALIFORNIA 91601 (213) 766-3715

L208 1-70-CD

Specializing in meeting impossible demands.



LIGHTING, GRIP EQUIPMENT,
LOCATION VANS, PROPS, GENERATORS,
RENTALS / SALES / SERVICE

Charles Ross INC.

333 WEST 52nd ST., N.Y., N.Y. 10019 (212) CI 6-5470

For more than fifty years Charles Ross has made the impossible possible for the thousands of motion picture producers who demand the finest and most modern lighting equipment. We are the East's only specialist. We have been around the longest. We have the largest lighting inventory. We even supply lighting suppliers.

For a replacement bulb or lighting for a complete motion picture or television set, call Ross first!

SOLE DISTRIBUTOR OF MOLE-RICHARDSON COMPANY PRODUCTS IN GREATER NEW YORK

Send for a rental rate schedule!



Charles Ross INC.
333 West 52nd Street
New York, N.Y. 10019



AC115

Gentlemen: Please send me a free copy of your rental rates.

NAME _____

FIRM _____

STREET _____

CITY _____ STATE _____ ZIP _____

everybody came up with his own little treat — a real Howard Johnson's menu — chicken tetrazzini, beef almondine, tuna a la neptune, turkey supreme, prunes. Of course, regardless of the label, everything tasted the same, but this was somehow reassuring.

Before the sun went down I jammed the Bolex tripod between two rocks and set up a time-lapse shot toward 12,326-ft. Mt. Adams, fifty miles to the south. The sun set as directed, and the shot was superb.

Our climbing schedule called for a 2:00 A.M. wake-up on Sunday, with a 3:00 A.M. departure. That meant "getting organized" at 10:00 P.M. Saturday night. Since we planned to return via the same route the next day, we were able to stash all the unnecessary equipment — which amounted to fifteen exposed cartridges.

The periodic roar of avalanches somehow kept us awake. To pass the time I pulled out my little black book (lighter and more portable than the *American Cinematographer Manual*) and showed Jeff some facts and figures. He was asleep instantly.

	Super 8	16mm
* 100 minutes raw stock with processing	\$ 240	\$ 720
* One-light workprint with edgenumbering	\$ 300	\$ 360
* 20-minute timed A & B answer print with sound	\$ 130	\$ 240
TOTAL:	\$ 670	\$1320

A cursory glance at these figures reveals the real cost advantage of Super-8 is in the raw stock and processing stage. This means with selective workprinting I can take the shooting ratio up to immodest levels without spending lots more money. (Though not to the obscene eighty-to-one 35mm shooting ratio of JONATHAN LIVINGSTON SEAGULL.)

Another money-saving possibility is to transfer the original footage directly to videotape and use that as a workprint. One method of accomplishing this is the following: View the original footage once and record on a shot log the exact content and length of all takes. Sync up all the sound footage very carefully in one pass through an editing table with a seconds or footage counter. The sound footage is then played back double-system for videotaping. Add a digital clock that reads out in seconds in one of the lower corners of the screen and you have a reference between the videotape and the seconds and/or footage counter on the editing table.

This means handling the original three times, but I've found that the amateur "projection" stocks, 160 and K11 are tough to scratch. The real advantage of a videotape workprint is the fast forward and reverse capability, and the ability to make practice edits without cutting anything. I view the videotape numerous times to become intimately familiar with every shot, and then edit electronically to a master deck — usually a Sony 3650. Theoretically, the original Super-8 can be conformed by someone who has never seen a frame of footage. For example, the first shot on the edited videotape is a long shot of Mt. Rainier. The digital clock readout on the tape says 01 01 12 and advances to 01 01 25 before the first cut occurs. The editor would then put the 01 roll of film on the table, go in until the counter reads 1 minute, 12 seconds (or its footage equivalent, 24 ft. 00 frames), and clip out the next 13 seconds (or 4 ft. 24 frames). The second scene on the edited tape is Jim Mitchell signing out at the ranger station — readout 03 02 27 to 03 02 42 — you guessed it. Pull out roll 03 and so on.

This editing system works and was primarily developed by Al Fisk of South Seattle Community College. As a matter of fact, many of the ideas, camera, and recorder tech-

niques referred to in this article were "developed" by Al.

A couple of years ago Al had the foresight to purchase one of the original Hamton/MIT/Leacock Super-8 systems. He felt the cost savings in raw stock and processing would pay for the system in one year. Al has put together a very substantial film and sound studio for student use at the college and is very generous with his time and expertise, and the school's equipment. Occasionally he will be a Sherpa if you throw in a little extra Budweiser.

Back to Rainier. Our summit attempt began promptly at 3:00 A.M., and, luckily, we didn't have a footcandle of light until about 6:00. Every hour Jim would rest and talk about the importance of pacing, water intake, sunburn protection, and the symptoms of altitude sickness. Fortunately, Jeff and I are normally lightheaded, pale, lethargic — so we just kept cranking with the Nizo and Sony.

We got to see a real live rescue just below the summit. A helicopter landed at 14,000 ft., adjacent to a crevasse where two injured climbers had just spent 56 hours. I was waiting to see local news crews jump out so I could throw their CP-16's, Angenieux's, power packs, body pods, and light meters down into oblivion. Instead it was a few of the super-professional mountain rescue people who make "impossible" saves time after time.

The pilot's walkie-talkie did strange things to our Hamton/Sony sync recorder. Here we are filming a life and death drama on the top of the world and all the recorder can do is pick up Wolfman Jack down the coast.

This apparently excited Jeff. We ran to the summit to get the arrival of the climbers and shot twelve minutes of ecstatic, exhausted people slapping and taking pictures of each other. Jeff chose this time to get the final twelve-minute gap on the tape. With the earlier six minutes of blank tape, his contract was fulfilled, and he was now asking for residuals.

This seemed like a good time to move to single-system shooting. I was tired of focusing anyway, so I pulled out the Ektasound 130. Given their limitations, the 130 and 140 really do a good job. I'm waiting anxiously to get my hands on the new Supermatic 200 with its 24 fps professional sound speed, auto-exposure override, and 200-foot load (10 minute sound, 13 minute silent).

Jim Mitchell was pointing out all the landmarks from the summit — Mt. Hood, Mt. St. Helens, the smog where Tacoma was supposed to be, and the parking lot 9,000 ft. and 10 miles below. Noticing my cameras, a gentleman waving madly at Mt. Adams approached and offered me a check if I would sign a piece of paper (money talks at that altitude in those conditions).

The next thing I knew it was Wednesday morning and I had signed a contract to film a Mt. Adams climb the coming weekend.

"Jeff, do you remember that sunset shot we got of Mt. Adams from Mt. Rainier?"

"Beautiful shot!"

"We've got a chance to get one going the other way."

Jeff was up, grabbed his salmon pole, garbled something about Sherpa fishing rights, and hasn't been seen since.

Twenty yards from the parking lot Al Fisk turned to me — "You forgot something."

Hallucinating about helicopters, Ding Dongs, and four-figure budgets, I stumbled to the car and squeezed the extra Buds into the cooler. ■

(ABOUT THE AUTHOR: AMBROSE SALMINI is a filmmaker with McKinley Productions in Seattle, Washington. He is also the organizer and current president of Media America, a non-profit organization trying to stimulate the distribution of small-format [Super-8 and Video] productions in the United States.)

TIFFEN

Available at Dealers throughout the World.



PROTECTIVE FILTER POUCH

This maximum security long wearing ruggedly constructed Naugahyde pouch is reinforced with a contrasting stitched Naugahyde binding. The inside is lined with 100% Nylon over foam cushioning for freedom from lint and super protection. A long life Velcro closure seals the pouch with a touch of the finger, thus eliminating the potential damage from old fashioned pressure-snap closures. Sizes to fit: 3x3 and Series 9, 4x4 and 4 1/2" round, 5x5 and 138mm round, 5x6, 6x6, and 6.6x6.6.



VIEWING FILTER


Permits the visual interpretation of shadow and high-lighted details corresponding to the film's emulsion. Color and b/w types available; interchangeable filters. With neck chain; pocket case.

No. 1 Black and White Viewing Filter 90/50.

No. 2 Color Viewing Filter ND 2.0.

No. 3 For faster color films and lower light levels.

Other densities & replacement glass available on request.



PROFESSIONAL RUBBER LENS SHADE

This shade, designed for heavy duty use, is made from a specially formulated rubber compound and is engineered to meet the rigors of all weather shooting. Highly protective of lens, it collapses easily for storage. Circular molded light baffles eliminate extraneous reflections and flare. Available in 86mm, Series 9 and 9 WA, 4 1/2" and 4 1/2" WA.



FLUORESCENT LIGHT FILTERS FL-B FL-D

Two Color Correction Filters designed to give accurate color renditions with average fluorescent lighting. Eliminates the deep blue-green cast ordinarily resultant from shooting color films with fluorescent lights. Can be used with the broad soft illumination of overhead and desk-type fluorescent lamps without regard to daylight, cool white or warm white rating of the lamps.

TIFFEN

71 Jane Street, Roslyn Heights, N.Y. 11577
(516) 621-2700 Telex 96-7748

SUSTAINING
MEMBER
SMPTE

Member Professional
Motion Picture
Equipment Association
pmpea

**HOWARD A.
ANDERSON CO.**



CREATORS OF DISTINCTIVE IDEAS
AND DESIGNS FOR
SPECIAL PHOTOGRAPHIC EFFECTS FOR
MOTION PICTURES AND TELEVISION

TITLES · GRAPHICS · MINIATURES
BLUE BACKING · INSERTS
MATTE PAINTINGS · OPTICALS
SPECIAL UNIT PHOTOGRAPHY

Main Office: PARAMOUNT PICTURES
5451 Marathon Street, Hollywood, Calif. 90038
(213) 463-0100

STATEMENT OF OWNERSHIP, MANAGEMENT AND CIRCULATION. (Act of August 12, 1970: Section 3685, Title 39, United States Code)

1. Title of Publication: AMERICAN CINEMATOGRAPHER.

2. Date of Filing, September 26, 1974.

3. Frequency of issue: 12 Times a Year.

3A. Subscription price . . . \$9.00 a year.

4. Location of known Office of Publication: 1782 North Orange Drive, Hollywood, California 90028.

5. Location of the Headquarters or General Business Offices of the Publishers: Same as 4.

6. Names and addresses of Publisher, Editor, and Managing Editor, Publisher: A.S.C. Holding Corporation, 1782 North Orange Drive, Hollywood, California 90028; Editor: Herb A. Lightman, Same as above.

7. Owner (if owned by a corporation, its name and address must be stated and also immediately thereunder the names and addresses of stockholders owning or holding 1 percent or more of total amount of stock. If not owned by a corporation, the names and addresses of the individual owners must be given. If owned by a partnership or other unincorporated firm, its name and address, as well as that of each individual must be given). A.S.C. HOLDING CORPORATION, 1782 North Orange Drive, Hollywood, California 90028.

8. Known Bondholders, Mortgagees, and other Security Holders owning or holding 1 percent or more of total amount of Bonds, Mortgages or other Securities: None.

9. For optional completion by publishers mailing at the regular rates (Section 132.121, Postal Service Manual). 39 U.S.C. 3626 provides in pertinent part: "No person who would have been entitled to mail matter under former section 4359 of this title shall mail such matter at the rates provided under this subsection unless he files annually with the Postal Service a written request for permission to mail matter at such rates."

In accordance with the provisions of this statute, I hereby request permission to mail the publication named in item 1 at the reduced postage rates presently authorized by 39 U.S.C. 3626.

(Signature and title of editor, publisher, business manager, or owner):

Herb A. Lightman,
Editor

10. For completion by nonprofit organizations authorized to mail at special rates (Section 132.122, Postal Manual). (Check one): The purpose, function, and nonprofit status of this organization and the exempt status for Federal income tax purposes: Have not changed during preceding 12 months; Have changed during preceding 12 months; (If changed, publisher must submit explanation of change with this statement.)

11. Extent and nature of circulation. A. Total No. copies printed (Net Press Run): Average No. copies each issue during preceding 12 months, 18,500; Actual number of copies of single issue published nearest to filing date, 18,400. B. Paid circulation: 1. Sales through dealers and carriers, street vendors and counter sales: Average No. copies each issue during preceding 12 months 3,922; Actual number of copies of single issue published nearest to filing date, 3,993. Mail subscriptions: Average No. copies each issue during preceding 12 months, 13,684; Actual number of copies of single issue published nearest to filing date, 13,799. C. Total paid circulation: Average No. copies each issue during preceding 12 months, 17,606; Actual number of copies of single issue published nearest to filing date, 17,792. D. Free distribution by mail, carrier or other means: 1. Samples, complimentary, and other free copies: Average No. copies each issue during preceding 12 months, 444; Actual number of copies of single issue published nearest to filing date, 500. 2. Copies distributed to news agents, but not sold: Average No. copies each issue during preceding 12 months, 0; Actual number of copies of single issue published nearest to filing date, 0. E. Total distribution (Sum of C and D): Average No. Copies each issue during preceding 12 months, 18,050; Actual number of copies of single issue published nearest to filing date, 18,292. F. Office use, left-over, unaccounted, spoiled after printing. Average No. copies each issue during preceding 12 months, 500; Actual number of copies of single issue published nearest to filing date, 108. G. Total (Sum of E & F — should equal net press run shown in A): Average No. copies each issue during preceding 12 months, 18,550; Actual number of copies of single issue published nearest to filing date 18,400.

I certify that the statements made by me above are correct and complete.

(Signature of editor, publisher, business manager, or owner):

Herb A. Lightman,
Editor

FALL CLEARANCE SALE

DEMONSTRATORS

All items like new and carry full new equipment warranty:

Arri 16SB, motor, battery	\$2995.00
Canon Scoopic 16M camera	1295.00
Angenieux 12/120 zoom lens w/finder	1895.00
Frezzolini MC-571 sound camera, battery	2495.00
Frezzolini LW16 sound camera, battery	3495.00
Magnetic recording heads for Auricon, CP or Frezzi	395.00
B & H 400' 16mm magazines	100.00
Phomar 30V battery belt	349.00
17/70 Angenieux lens, Arri mount	395.00
17/85 Pan Cinor zoom, Auricon long finder	475.00
Zeiss 12.5 to 75 zoom lens, Arri mount	595.00
Arri-16BL, 12/120 Ang., 400' Mag.	6995.00

USED EQUIPMENT SPECIALS:

Frezzolini MC-571DC sound camera, battery	1995.00
Auricon CV conversion, takes Mitchell magazines	995.00
Auricon 600 Special, 1 magazine	995.00
Auricon 600, 1 magazine	795.00
Auricon Super 1200 camera, 1 1200' mag.	1395.00
Arri 16S, motor battery, 17/70 Pan Cinor zoom	1795.00
Arri 16S, motor, battery, 3 lenses, mat box	2195.00
Arri 35mm IICGS, sync gen. 2 ground glasses, variable motor	2995.00
Arri 35mm II, 2 400' mags, 3 lenses, mat box, var. mot.	995.00
Arri 35mm I, 3 lenses, variable motor, mat box, 2/200' mags	695.00
Eyemo 35 cameras, all types, lenses from	175.00
Kodak Cine Special cameras from	295.00
12/120 Angenieux lens, Arri mount	995.00
17/70 Pan Cinor, Arri mount	295.00
Arri & C mount lenses, all sizes — tell us your needs.	
B&H Filmo and Eyemo motors, battery or AC	95.00
B&H Filmo 16/400' magazines	75.00
Auricon MA-11 amplifiers, Filmagnetic, w/charger	349.00
17/85 Pan Cinor zoom, regular finder	249.00
17/68 Angenieux zoom, finder	295.00
17/68 Angenieux zoom, no finder, C mount	195.00
12/120 Ang. zoom, no finder, C mount	895.00
Frezzi 1000D power packs for Auricon	295.00
Frezzi 30V battery pack	250.00

Write or phone
for further information.

PHOTOMART

CINE EQUIPMENT SUPPLIERS

6327 S. ORANGE AVE., ORLANDO, FLA. 32809

Phone (305) 851-2780

SUPER-8 SOUND RECORDERS

Continued from Page 1318

of servo-control are thus able to replace the brute force synchronism achieved by mechanical sprocket drives, and without the flutter that results as sprocket teeth pop in and out of sprocket holes. A comparison with 16mm fullcoat magnetic film recorders will reveal how much simpler and more elegant are the so-called "electronic sprockets" of the Super8 Sound Recorder.

Sprocketed Magnetic Film Recorders

For some purposes it is essential to have mechanically sprocketed drives for fullcoat magnetic film dubbers. Multi-Track-Magnetics of Closter, N.J. is now offering Super-8 versions of their R107U Dual-Lock recorder/reproducer. The machine is available with a half-track fullcoat magnetic head assembly (compatible with the Super8 Sound Recorder) and/or an interchangeable edge stripe magnetic head assembly. The edge stripe head assembly is relieved in the picture area, and can be used by labs to transfer sound to striped film from a fullcoat track on an interlocked reproducer.

Simple mechanical interlock is available for multiple units in the same rack mount. Selsyn electrical interlock (single phase or three phase) is available for labs with a selsyn distribution system. In this manner Super-8 projectors can be interlocked and run forward and backward in sync with the Super-8 dubbers. Another projector interlock method is by flexible shaft from the R107U to the main drive shaft of the projector (24fps — 1440rpm), but this requires custom modification of the projector.

Cassette Sync Recorders

Cassette tape is the least expensive and most convenient method available of recording location sync sound. Cassettes are easily labeled with dates, locations, take-numbers, etc. They can be permanently protected from accidental erasure or reuse by punching out the record-protection tabs. Two hours of cassette tape are packed into the same volume as 2½ minutes of Super-8 film.

Any 1/F sync cassette recorder is compatible with more than forty Super-8 cameras equipped with a once-per-frame (1/F) sync contact switch or internal pulse generator (Nizo). The camera-recorder sync cable requires a miniature built-in pulse generator that converts the camera's 1/F switch into a recordable voltage. Alternatively, the

Continued overleaf

gei



put your
money
where your
value is...

The Steenbeck ST1900 is built better — not cheaper — to provide many more years of quality service . . . and that means a better return on your investment . . . that's value.


The compact ST1900 still features heavy duty all-metal construction, still offers the same high quality editing capabilities, still provides exceptional operating performance, and is still available at a price you can afford.

GENERAL ENTERPRISES, INC.

10518 Detrick Avenue
Kensington, Md. 20795 U.S.A.
Telephone: 301 942-1170

AVEX-I . . . A NEW CONCEPT IN FILM SOUND PRODUCTION

**TRANSFER, PREVIEW, EDIT, AND MIX WITH
THIS UNIQUE 4 1/2' CONSOLE**

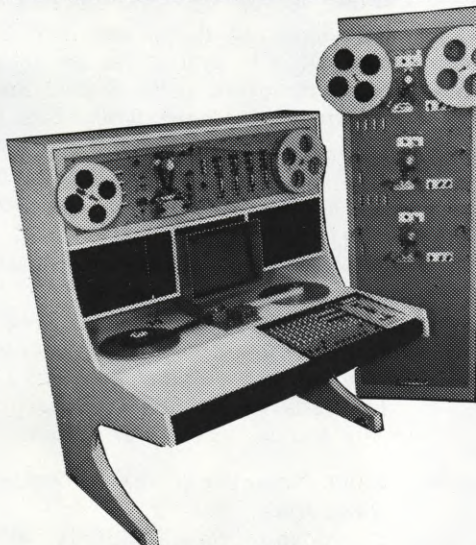

The AVEX-I is a self contained, complete film sound production facility. It is a conceptual breakthrough for TV and film producers, educators, advertising agencies and others.

The tool of tomorrow here today, it will reduce costs and enhance creativity considerably. The unit's modular architecture makes the system highly flexible to meet your particular audio and visual needs.

The console features direct tape to mag transferring (16 or 35) • work track preparation • fingertip control pick-up recording (Rock & Roll) • premixing with picture • synchronous (24fps) and high shuttle speed in forward and reverse • built in mixing board to your specs (max. 8 inputs - 4 outputs) • individually equalized inputs with push button assignment • complete patching and monitoring • moves smoothly on casters • Reverb, echo, noise suppression and other accessories available. Standard model available with 1, 3 and 4 Track Master Recorder, 16 or 35. The AVEX I can be interfaced with standard interlock systems, SMPTE time lock, and TV & Video Servo Systems.

We also manufacture a complete line of professional film sound recorders and supporting systems of unequalled reliability and sensible innovation.


WRITE OR CALL
FOR FULL INFORMATION

MULTI-TRACK MAGNETICS, INC.

ONE RUCKMAN ROAD
CLOSTER, N.J. 07624
201-768-5037

BRAUN ELECTRIC CANADA, LTD., 3269 American Drive, Mississauga, Ontario, Canada 416-678-9200
MTM FILM RECORDERS, INC., 6253 Hollywood Blvd. # 203, Los Angeles, Calif. 90028 213-469-0705

The O'Connor Model 50-C is a smooth operator.

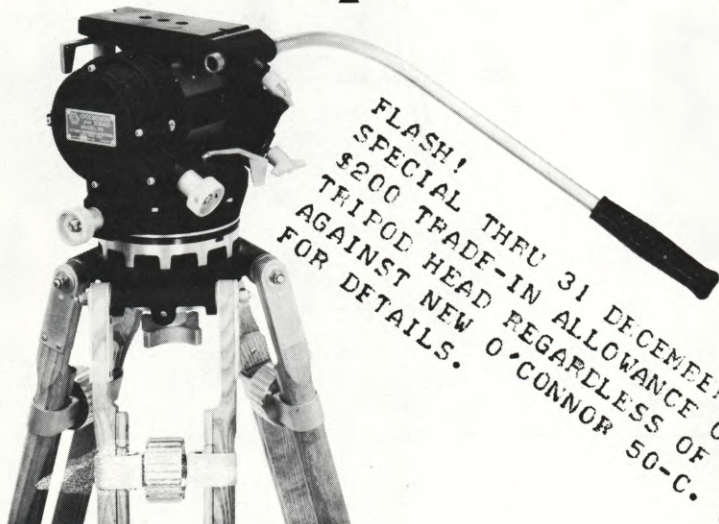

Victor Duncan agrees.

Ever hate to make that last, tiny adjust for fear that you'll get a hop instead of a "smooth ooze?" That's what a lot of us do, and we ride with a compromise composition, purely for lack of faith in the tripod head.

"Smooth ooze" performance relates to engineering technicalities like break-away friction, fluid-flow, and counter-balanced torque. However O'Connor manages to make it, "smooth ooze" is what you get with the Model 50-C precision fluid action tripod head. With jerk-free panning and tilting, it's hard to make a bad camera move, even if you have the hiccups.

The new Model 50-C and the new claw-ball base allows quick, single-knob leveling adjustment in any direction. Use it on other conventional legs, or, better yet, put it atop the O'Connor tripod with claw-ball socket. These tripods are made the old-fashioned way, with high quality New England hardwood and precision castings.

If you're in the market for a high quality fluid head, let the people at Victor Duncan show you an O'Connor 50-C. It's got "smooth ooze" and Victor Duncan knows it.

the check and double check people

Member Professional
Motion Picture
Equipment Association
pmpea



VICTOR DUNCAN, INC.

Rentals, Sales, Service

676 N. St. Clair, Chicago, Illinois 60611 - (312) 321-9406
2659 Fondren, Dallas, Texas 75206 - (214) 369-1165
11043 Gratiot, Detroit, Michigan 48213 - (313) 371-4920

camera may be crystal-controlled and a crystal sync generator plugged into the cassette recorder. Super8 Sound manufactures these special sync cables for forty Super-8 cameras, and crystal sync generators for the three cassette recorders described below:

The smallest and least expensive sync cassette recorder is a Phillips 3302/Norelco 150 Carry-corder known as the Scipio recorder modified for sync location recording with any of the once-per-frame digital sync-pulse cameras. The sync pulse or burst is recorded on cassette track 4 in conformity with ANSI standard for audio-visual cue pulses, and with proposed SMPTE standards for film sync signals. Standard cassettes may be used. The resulting sound can be transferred to Super-8 mag film on the Super8 Sound Recorder, which speed controls itself to match the original sync pulse frame-for-frame. The Scipio has manual gain control.

Scipio Specifications: Frequency Response, 60-10,000Hz ± 3dB; Signal/Noise Ratio, 45 dB; Wow and Flutter, 0.4%; Power, DC 7.5V/0.8W (5 C cells); Size, 20cm x 11.5cm x 5.5cm (7-7/8" x 4-1/2" x 2-3/16"); Weight, 1.35kg (3 lbs.) with batteries; Temperature extremes, 5-45° C (40° — 110°F); DIN input/output jacks; Microphone sensitivity, .2mV at 2000Ω; 1/F sync pulse on cassette track 4.

The Phillips 2209AV recorder has a sync pulse channel on cassette track 4, like the Scipio. Although originally designed for synchronizing tape/slide shows, Braun/Nizo and Leitz/Leicina recommended it for use with their cameras with sync pulse generators. Until the advent of the Super8 Sound Recorder, American filmmakers with sync sound cassettes made on the 2209 could do nothing with their sound. Super8 Sound has further extended the usefulness of the 2209 by manufacturing an inexpensive pulse generator (built into the camera/recorder cable) that allows any camera with a once-per-frame contact switch to be used with the Phillips 2209. The 2209 has automatic gain control only, and battery or AC operation.

2209 Specifications: Frequency Response: 60-10,000Hz ± 3dB; Signal/Noise Ratio, 45dB; Wow and Flutter, 0.4%; Power DC 9.5V/1.1W (6 C cells), AC 110V/3W; Size, 21.5cm x 17.1cm x 5.8cm (8-1/2" x 6-3/4" x 2-1/4"); Weight 1.85kg (4 lbs.) with batteries; Temperature extremes, -5° - 50° C (20° — 120°F); Microphone sensitivity, .2mV at 2000Ω; DIN

input/output jacks; 1/F sync pulse on cassette track 4.

The Uher CR134 cassette stereo recorder is the smallest high-quality portable cassette recorder made. Super8 Sound has adapted this machine for use as an extremely portable location sync recorder, especially useful for one-man filming operations. Sync cables are available for connection to more than forty Super-8 double-system sync cameras.

The Uher CR134 can record original location sound in stereo on cassette tracks 1 and 2, and simultaneously record the digital 1/f sync pulse on cassette track 4. This is not a converted stereo machine with one stereo channel used for sync. It is fully compatible with ANSI standards and proposed SMPTE standards for the placement of sync and audio signals.

This machine is of special interest to those preparing stereophonic sound tracks, for example, for 3/4" videocassette programs. The two-channel capability is primarily useful in filmmaking to record sound from two different perspectives (e.g., both sides of a two-shot). Another important application for the two-channel capability is in interviews, where two microphones and two separate channels can be used to insure redundancy in case of one channel failing.

The Uher cassette has automatic and manual control, and a defeatable source monitor through the speaker. It has built-in time condenser (not an electret) microphone. It has automatic reverse but records sync in one direction only. It operates on AC or battery, including rechargeable NiCad batteries, and has a digital counter.

Uher Specifications: Frequency Response, 25-15,000 Hz +2 dB; Signal/Noise Ratio, 48 dB; Wow and Flutter, 0.14%; Stereo separation, 20 dB; Power, DC 9.0V/7W (6 C cells), AC 110V/15W; Size 18.1cm x 18.4cm x 5.7cm (7-1/8" x 7-1/4" x 2-1/4"); Weight, 2kg (4.5 lbs) with batteries; DIN input/output jacks; Microphone sensitivity, 0.2mV at 500Ω. 1/F sync pulse on cassette track 4.

The XSD (Crystal-Sync-Dolby*) Recorder is a SONY TC153SD stereo cassette recorder, modified to include a built-in 60Hz pilotone quartz crystal oscillator. It can record sound in sync with any Super-8, 16mm or 35mm camera that is crystal-controlled or has standard pilotone sync output. Although it can work with pilotone cameras by sync cables, it is primarily intended for cableless, multiple recorder/multiple camera location work,



We'd like to have the opportunity to shake hands and get to know you. Standard Theatre Supply is the largest cinematography equipment dealer in the southeast. Our equipment covers virtually every item needed by the professional cinematographer . . . and our prices are very competitive. Roger Carter heads up our program and will be calling on you in the near future. Until then give Roger a call when you have need of our services, and we will prove just how competitive we are. We want you to put all your business here . . .



Standard Theatre Supply

125 Higgins Street / P.O. Box 20660
Greensboro, North Carolina 27420
(919) 272-6165
Toll Free Wats: (N.C.) 1-800-632-0225
(S. Ohio, S.C., Va., W. Va., Tenn., Del.,
D.C., Ga., Md.) 1-800-334-0201

COLUMBIA
COLLEGE

COLUMBIA
COLLEGE

Approved for Veterans

A study of the Motion Picture and Television Arts and Sciences within a degree program, taught by a distinguished faculty.

Now Registering. Write for a descriptive brochure.

COLUMBIA COLLEGE


925 No. La Brea Ave.
Hollywood, Calif. 90038
851-0550

CLEARANCE SALE — ALL BRAND NEW EQUIPMENT

Eclair NPR, w/12-120 lens — Perfectone Motor — complete outfit . . .	\$9,995.00
25-250 Angenieux Zoom in Arri or Eclair mount	\$2,995.00
Bauer P6 Studio Double Band Projector — similar to Sonorex	\$3,495.00
Bauer P6 Synchron Projector — synchronous — optical & magnetic	\$1,595.00
Beaulieu 16B (PZ) complete w/12-120 & battery	\$2,195.00
Angenieux 12-120 w/AUTO-IRIS (Latest model) w/1" finder	\$2,495.00
Angenieux Arri Bayonet Mount 9.5 to 95mm zoom	\$1,995.00
Angenieux Bolex RX 12-120 w/Auto Iris	\$1,495.00
Angenieux 12-120 w/finder (lever zoom not crank)	\$1,795.00
Canon Macro zoom 12-120 in Arri, Arri Bayonet or CA-1 mount	\$1,395.00

GORDON YODER, INC.

2840 Reward Lane Dallas, TX 75220 AC 214-357-3045

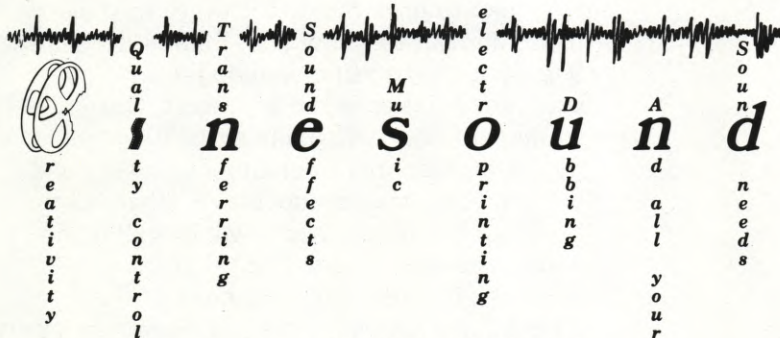

Complete sound services for 16 & 35 mm films
— 915 N. Highland Ave. Hollywood —
464-1155

MICROFILMED

BACK ISSUES OF
AMERICAN CINEMATOGRAPHER

UNIVERSITY MICROFILMS

EDITORIAL SERVICES
300 N. ZEEB RD.
ANN ARBOR, MICHIGAN 48106

and it is described in the article on crystal sync Super-8 equipment by its designers, Al Mecklenburg and Jon Rosenfeld. It cannot record sync sound with 1/F sync pulse cameras.

Back in the laboratory, original sync cassette sound should be played back on the same sync recorder as was used in the field. The sync tape recorder is connected to the Super8 Sound Fullcoat Recorder by a (SYNC) Resolver Cable. This cable carries the 1/F (or pilotone) sync signal recorded in the field, and feeds it to the servo-control speed-matching circuitry of the Super8 Sound Recorder. The Super8 Sound Recorder will change its speed to match any variations in the original camera speed, plus any variations in speed of the sync cassette tape playback. It will record one frame of fullcoat magnetic film for each frame of picture originally taken, and without letting camera or recorder speed variations affect the sound fidelity.

We strongly recommend the use of an audio equalizer during transfers to Super-8 fullcoat magnetic film, especially with the Scipio and 2209 recorder which have a relatively high level of tape hiss. This is also true of transfers from a magnetic edge stripe of a single-system original film.

Once sound is on fullcoat magnetic film, any sophisticated post-production sound technique can be accomplished:

Sync Transfers: Fullcoat magnetic film to quarter-inch tape; Quarter-inch tape to fullcoat; Fullcoat to magnetic edge stripe.

Sync Recording: Voice-overs; Narration; Sound effects; Music tracks, etc. can then be edited into sync.

Rerecording: Dubbing dialogue in sync with original dialogue; Dubbing in sync with loops of picture.

Multi-Track Recording: Multiple fullcoat recorders in sync (with one fullcoat strand for each track); Multiple track quarter-inch tape recorders in sync with one or more fullcoat recorders.

Mixing: Sound mix with picture; Mix without picture (blind); Loops of sound for room tone, wind, traffic effects; Disc recordings of library effects.

MULTIPLE-TRACK RECORDERS

Multiple-track tape recorders, used in conjunction with the Super8 Sound Recorder, allow voice-overs, narration, sound effects, and music tracks to be added alongside sync dialogue or on-location sound effects tracks.

Mixes of up to three sync tracks are readily achieved on quadrasonic four-

channel tape recorders (one channel carries sync pilotone). One Super8 Sound Recorder is used to play-back an edited "A" fullcoat track of sync material. The Recorder provides a 60Hz pilotone signal in sync with the "A" track's sprocket holes. This signal is recorded on track 4 of the 4-channel recorder while the audio is recorded on channel 1, say. Alternatively, the 60Hz pilotone signal could have been pre-recorded, and the Super8 Sound Recorder would "self-resolve" to match speed with that pilotone signal.

Now a "B" track of edited sync material is put on the same Super8 Sound Recorder. It is started by a bloop tone at the sync start of track "A", and self-resolves to match the pilotone, allowing the "B" track to be recorded on channel 2, say. This can be repeated with channel 3 and a third sync track, or channel 3 can be used to add a wild narration or other wild material.

The three channels are then mixed back to a fullcoat composite mixed master track on the same Super8 Sound Recorder, again synchronizing with the 60Hz pilotone control track.

The four-channel recorders most suited to this work have independent recording channels and the capability to record straight across from a pre-recorded track, while listening to that previously recorded track in sync with the track being laid down via the record head (and not through a separate monitor or playback head some distance away, which would introduce a delay.) Such machines are described as having "Syncro-Trak" (SONY) or "Simul-Sync" (TEAC).

MULTIPLE FULLCOAT RECORDERS

Since any number of Super8 Sound Recorders will run together in sync with the AC line frequency, any number of tracks can be mixed, and recorded on a master track recorder also running in sync. The Super8 Sound Recorders are started simultaneously in sync by using an AC Common Start Box or a Photo-Start/BeepStart device, which responds to a beep tone, and releases each recorder at the same instant.

With an AC synchronous projector or an AC synchronous editing table these mixes can be done while watching the picture in sync. If your projector only has 1/F sync capability, you can still run up to six Super8 Sound Recorders in sync with it by using special multiple recorder sync cables.

Post-synchronous sound, e.g. dubbing dialogue or replacing lines which are unusable in the original recording, can be accomplished with two Super8 Sound Recorders with or without picture. ■



"COPTER" CAMERA MOUNTS

World-wide acclaimed range of Helicopter Camera Mounts for 35mm, 16mm, and Video Cameras.


ONE CALL PROVIDES MOUNTS, CAMERAS, STORY AND CAMERA HELICOPTERS, PRODUCTION CREWS, WORLD-WIDE

**Continental Camera Systems
National Helicopter Service**

989-5222 16800 ROSCOE BLVD. **345-5222**
VAN NUYS, CALIF. 91406

Dealer List

Chicago (312) 321-9406
Dallas (214) 369-1165
Detroit (313) 371-4920
Miami (305) 751-1818
San Francisco
(415) 957-1787
New York (212) 581-5474
(212) 895-5372
Long Island, N.Y. (516) 294-0355
Utah (801) 295-8368
Toronto (416) 920-5424
London (01) 223-2600
Sydney 439-6955
or 669-6000
Bangkok 821720

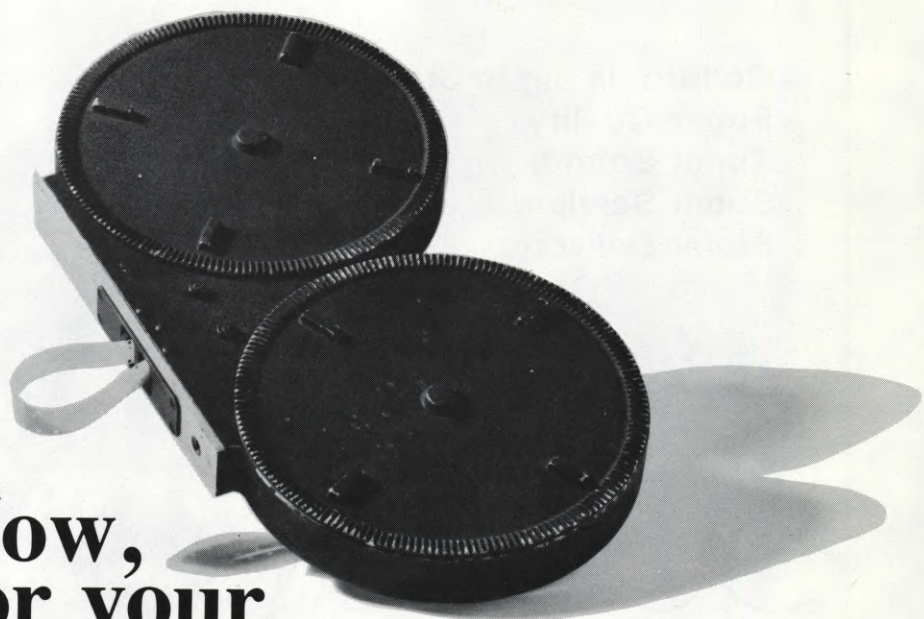

Now, for your second most important decision.

Your first important decision was composing, lighting and shooting.

Now comes your second most important decision . . . having it processed where you know your visual conception becomes a reality with no flaws.

That's where we come in. At Photo Processors your job is as important to us as it is to you.

We've invested in the finest color equipment available. Our team of color specialists are here to insure the best end-product possible.

Send your next color job to us and let us show you what we mean.



photo processors inc.


Box 2116A, Austin, Texas 78767
AC 512-472-6926

Rotating aerial image, quartz-halogen illumination, solid state sequencer, interchangeable 16mm, Super 8 and 8mm modules.

Our uniquely designed intermittent drive system and fixed pin registration combined with State of the Art electronic and electromechanical automated controls have resulted in a professional optical printer of extreme versatility within reach of your budget.

Several models of standard and aerial image optical printers available to satisfy the needs of the independent filmmaker, universities and motion picture laboratories.

Write for brochure.

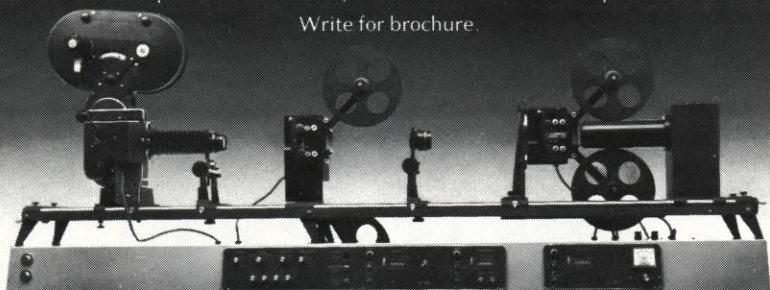

J-K CAMERA ENGINEERING, INC. 5101 SAN LEANDRO ST. OAKLAND, CALIF. 94601

**Colburn is big in Super 8.
Super Quality.
Super Sound.
Super Service.
Super Delivery.**

SUPER 8

- Super 8 contact prints with fades and exposure corrections.
- Super 8 reduction prints.
- 16mm enlargement prints from Super 8 originals on wet-gate printer. (Recommended when printing from Super 8 originals with base scratches.)
- Send for our price list covering our complete laboratory services.



GEO. W. COLBURN LABORATORY, INC.

164 N. WACKER DRIVE • CHICAGO, ILL. 60606 • 312/332-6286

COMPLETE LABORATORY SERVICE FOR 16MM / EDITING / RECORDING / WORK PRINTING
SUPER 8, 8MM & 16MM RELEASE PRINTING / TITLING / 35MM SLIDE & FILMSTRIP SERVICE

DEVELOPMENT OF SUPER-8 Continued from Page 1283

sound tracks. In this way the time needed to turn out a 100-ft. Super-8 print could be reduced to 7 or 8 seconds, compared with conventional laboratory procedures requiring 10 to 20 minutes.

Despite these efforts, a ten-minute color sound Super-8 film print from a major studio (e.g. Walt Disney) sells for about \$30. When we compare the projected price of \$10-\$15 for a feature-length film on the new Videodisc system to be introduced in 1976, there is room for concern for the widespread use of Super-8 as a release medium.

On the other hand, there is the quite different — one might almost say the opposite — concept of original program production with Super-8 cameras. This concept is much more attractive, especially for those concerned mainly with putting ideas on film in an independent manner. With this objective, ideas can be made to materialize for others through the audio-visual medium. The pictures can be shown either by direct projection on a screen or as television picture displays. Distribution can be achieved either with film prints or by means of videotape or videodisc copies. Assembly of programs can be effected by physical editing of the original camera films or by electronic means during transfer to videotape or by videotape editing.

Low-cost Super-8 cameras are so much less expensive and more flexible than portable color video cameras, that it seems likely film will retain a competitive edge over videotape location facilities for the indefinite future. There is a great deal of interest today in the more glamorous video equipment, especially at television stations where portable electronic-news-gathering equipment is putting many film cameramen out of work. No doubt the leading news operations will continue their commitment to the electronic approach, but when smaller operations and independent video producers in government, education, and industry examine the comparative cost of Super-8 location and editing equipment, the cinematographic talents of the film cameramen and film editors will no doubt be back in demand.

If cinematographers are to make serious use of the new gauge, they must understand its shortcomings as well as its advantages. It can never equal the image quality of 16mm. One need only look at one-quarter (actually

one-third) of a 16mm projected image to see the quality available. But when Super-8 is used as an intimate, close-up medium, taking full advantage of the long lenses and low light level facilities, it can create a sensitive involvement and a cinema as exciting as 16mm or 35mm, since all the technical facilities are readily available at relatively modest cost to accomplish the full range of cinematic techniques — complex editing, multiple sound tracks, optical effects, etc.

The stage has now been reached where applications considerations can be given first priority. Movie makers, amateur or professional, can now make use of either double or single-system cameras for original Super-8 productions complete with sound, inexpensively and unobtrusively. With his battery-driven hand-held camera, the Super-8 filmmaker can go anywhere, even in potentially hostile situations, with assurance that he will be taken for just another amateur, filming for fun. With careful pre-planning and as much in-camera editing as possible, a Super-8 film half-an-hour in length can be made for less than \$100 direct costs.

Super-8 is so simple and inexpensive that it is within easy reach of almost anyone who has the urge to communicate visually with others. But learning how to communicate effectively is much more difficult to achieve. Super-8 makes the learning process somewhat easier, since the filmmaker can more easily retain personal control of how the medium is used. Super-8 favors this kind of attitude, since nothing need stand between the filmmaker and his audience — what he sees in the camera viewfinder he can show on a screen or on a television receiver.

The young generation learning film today should know that their enthusiasm will be the key to demonstrating that Super-8 need not be considered "sub-standard". They must study the techniques of professional cinematography, and they must study the technical capabilities of Super-8; then they must go out and show us how best to exploit the newest communications medium — professional Super-8.

(ABOUT THE AUTHOR: RODGER J. ROSS is an internationally recognized author and lecturer. He is a film and television consultant to Eastman Kodak Company and the Canadian Broadcasting Corporation. With John Lant and Karl Kruger, Ross published in the SMPTE Journal (March, 1971) the original recommendation for what is now Kodak's 200 foot single-system sound camera, the Kodak automatic processor with the rapidly processable new film stock 7244, and the Kodak Videoplayer. Ross is the American correspondent for the BKSTS Journal.)



TYLER
camera systems

**VIBRATION ISOLATION HELICOPTER CAMERA MOUNTS
FOR 16 / 35 / 70 mm AND TV PHOTOGRAPHY**

Hollywood 213-989-4420 — San Francisco 415-864-4644 — Toronto 416-920-5424 — New York 212-431-3930
Miami 305-757-5988 — London 01-452-8090 01-223-2323 — Paris 328-5830 — Sydney 43-1162
Send for brochure — Tyler Camera Systems, 14218 Aetna Street, Van Nuys, California 91401 U.S.A.

HELICOPTERS CAMERAMEN CAMERA PILOTS

SUPER-8 CAMERAS

Beaulieu 4008 ZM 8x64.....	Used	\$ 519.00
Beaulieu 4008 ZM11 6x66.....	New	\$ 969.00
Beaulieu 4008 ZM11 6x66.....	Used	\$ 749.00
Beaulieu 4008 ZM3 8x64.....	New	\$ 595.00
Beaulieu 4008 ZM3 6x66.....	New	\$ 699.00
Beaulieu 4008 ZM3 6x66.....	Used	\$ 549.00
Beaulieu 2008 8x64.....	Used	\$ 289.00
Beaulieu 5008-S w/6x80 Ang.....	New	\$1669.00
Beaulieu 5008-S w/6x66 Schneider..	New	\$1339.00
Beaulieu 5008-S w/6x80 Ang.....	Used	\$1400.00
Beaulieu 5008-S w/6x66 Schneider..	Used	\$1100.00
Canon 1014 AZ electronic.....	New	\$ 499.00
Canon 814 AZ electronic.....	New	\$ 319.00
Bolex 550 XL sound camera.....	New	\$ 339.00
Bolex 580 sound camera.....	New	\$ 339.00
Canon AZ 512 AL electronic.....	New	\$ 269.00
GAF 250SS-XL sound camera.....	New	\$ 229.00
GAF 605SS sound camera.....	New	\$ 249.00
GAF 805SS sound camera.....	New	\$ 289.00
Kodak Ektasound 130.....	New	\$ 159.00
Kodak Ektasound 140.....	New	\$ 229.00
Kodak Ektasound 160.....	New	\$ 299.00
Bell & Howell 1230 A Filmosonic XL..	New	\$ 229.00
Sanyko XL-40S sound.....	New	\$ 309.95
Minolta XL 400.....	New	\$ 189.00

SUPER-8 EDITING

Guillotine Super-8 splicer.....	\$ 16.00
Bolex Super-8 tape splicer.....	\$ 24.00
Maier Hancock 8, Super-8, 16 splicer.....	\$ 289.80
Minette Super-8 tape splicer.....	\$ 6.95
Hervic/Minette S-5 editor.....	New \$ 85.00
Hervic/Minette sound attachment for above.....	New \$ 28.00
Hervic/Cinekon Dual-8 editor.....	New \$ 31.95
Super-8 editing bench, 3-gang motorized synchronizer, foot pedal, S-5 Minette, speaker box (original cost: \$600.00).....	NOW \$ 300.00
HFC combination 3-gang/16mm/1 gang/super-8, synchronizer, speaker box.....	Demo \$ 300.00
Specialties Design editor Super-8 motorized w/3-gang sync.....	Demo \$ 400.00

BEAULIEU

Beaulieu 16 News camera w/12x120 Ang. w/double system module.....	like new \$4000.00
Beaulieu 16 News camera w/12x120 Ang. w/single system module.....	like new \$5000.00

SUPER-8 PROJECTION

Heurtier ST42 stereo proj.....	Demo \$ 800.00
Heurtier ST42 dual play.....	Demo \$ 600.00
Heurtier P-6 24B.....	Used \$ 139.00
Heurtier Sound base for P-6-24.....	Used \$ 189.00
Heurtier ST42 w/arc lamp, good for projection up to 100' (original cost \$5,500).....	Used \$2900.00
Bolex SM8 sound projector.....	New \$ 440.00
Bolex 18-5L Super-8 projector (50 cycle).....	Demo \$ 119.00
Bolex SP80.....	New \$ 430.00
Bolex SM8 w/extra speaker.....	Used \$ 299.00
Silma S-99 dual 8 proj.....	New \$ 99.00
Silma Bi-Vox sound projector.....	New \$ 329.00
GAF mod. 1488 dual-8 proj.....	New \$ 52.50
GAF 3000 sound projector.....	New \$ 199.00
Bell & Howell 1744 zoom sound proj..	New \$ 289.00
Bell & Howell 1641A double feature..	New \$ 89.00
Elmo ST 1200 mag.....	New \$ 339.00
Elmo ST 1200 mag/opt.....	New \$ 399.00

TRIPODS

Miller Sup. 8 head.....	\$ 119.00
Miller Model "F" head.....	\$ 250.00
Miller Model "F" w/slip pan unit.....	\$ 310.00
Miller Model Pro Head.....	\$ 360.00
Miller Model Pro w/slip pan unit.....	\$ 421.00
Miller Legs model "F" w/ball.....	\$ 222.00
Miller Legs model Pro w/ball.....	\$ 239.00
Bolex Tripod w/Adj. column, ball joint, pan head.....	\$ 160.00

GITZO TRIPODS: Quality European made
Write for Brochures and Prices—

METERS

Luna Pro light meter w/case.....	new \$ 90.00
Spectra Combi-500 w/case.....	used \$ 109.00
Spectra Professional.....	new \$ 119.00
Spectra Professional w/pointer lock..	new \$ 129.00
Spectra Color Meter.....	new \$ 499.00
Minolta autometer Spot att. kit.....	\$ 100.00
Minolta 1° Spot.....	\$ 310.00
Sekonic L28C w/case.....	\$ 49.00
Spectra 3-color meter w/case.....	used \$ 269.00

RECORDERS

Uher 1200 recorder w/Neo-pilot sync, ni-cad batteries, charger, case, microphone.....	like new \$ 999.00
Stellavox SP7 w/Neo-pilot.....	Demo \$1899.00
Stellavox AMI 1-5 Channel mono/stereo mixer.....	Demo \$1689.00

bel air
camera & hi-fi

927 WESTWOOD BOULEVARD
LOS ANGELES, CALIF. 90024
(213) 477-9569—(213) 879-9616

MAIL & PHONE ORDERS PROMPTLY FILLED
* Payments: We accept Certified Checks or Money Orders. Personal checks cause delay. To use your Bank America or Mastercard, send card number and expiration date. 20% deposit required for all C.O.D.'s. * Shipping Charges: extra. Please send est. chgs. Excess will be refunded. All shpg. chgs. not paid will be billed C.O.D. Min. \$3.00 shpg. chg. * Prices are valid when submitted for publication but may change without notice. Quantities are limited.

complete **MAIL** *sound service!*

TRANSFERS
SOUND EFFECTS
MUSIC
Sound EDITING to Picture
NARRATION recording
*MIXING

35mm

16mm
"SAME DAY SERVICE" on
DAILIES, TRANSFERS & EFX.
*AWARD WINNING MIXER: IRV NAFSHUN

qsi

HERE YOU ARE - ALL DUBBED!



quality sound, inc. 5625 melrose avenue, hollywood, calif. (213)/467-7154



CANADA'S LARGEST LAB
Continued from Page 1306

mation cameraman and working on optical printers, I had the necessary experience to know what had to be done. By cannibalizing our first reduction printer for such parts as the camera and lens, we designed and built the Super-8 Optical Printer. This printer was able to reduce slides on to Super-8 and do all types of effects on Super-8 original.

We made successful tests and finally after about one year in developing, we proudly announced our new service, thus completing our position as a truly full-service Super-8 laboratory. Unfortunately we ran into many problems with the optical effects printer. The camera did not stand up and we would always have to sacrifice something for quality. The process was extremely slow to the point that it would take a day or longer to put through 400 feet of film. We naturally couldn't charge the price it was worth and we couldn't speed up the process. In addition, we had to educate our clients in setting up the work for optical printing. The result of poor splices played havoc on our equipment and finally, after quite a bit of frustration, we had to give this service up. It just didn't fit into our production schedules and caused us more grief than it was worth.

Where did we go from here? We were able to produce Super-8 inter-negatives from original but could no longer do optical effects. While all this was going on we were also experimenting on a way to produce better quality prints from Super-8 originals. The answers to both problems came together when we discovered that by blowing up Super-8 to 16mm optically we could produce quality Super-8 prints as well as do optical effects at the same time. Since this work is done by a regular optical house, the costs were quite high, but the quality was there and that was the main concern.

Now Super-8 can be produced professionally — with certain limitations. Super-8 is not a large-screen format and cannot be compared to 16mm on a large screen. There are many economies in producing on Super-8, but disadvantages must be considered. For example, when shooting Super-8 it is necessary to stay with medium shots and closeups, since the small image cannot satisfactorily resolve long shots in detail. Neg cutting may become cumbersome, especially if edge numbers are not utilized, which is the case in the majority of films presently being produced in Super-8.

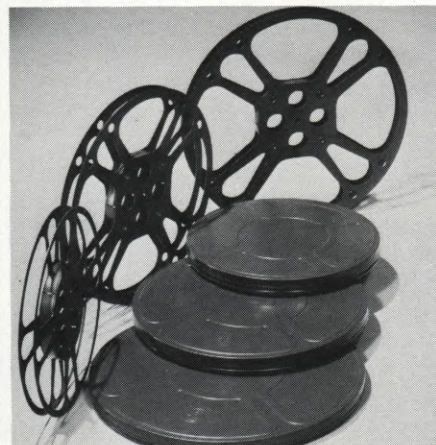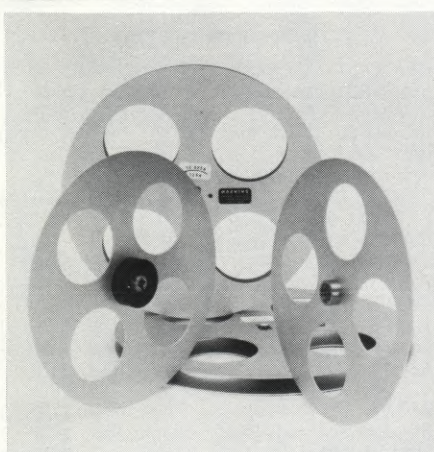

for all your reel needs!

- 8mm & Super 8mm Reels in steel, 200' to 2000'.
- 16mm Reels in steel, plastic and sheet aluminum.
- 8mm & 16mm cans in steel and plastic.
- Shipping Cases in fibre and plastic.
- Split Reels in steel and aluminum.
- 35mm & 70mm Reels in steel and aluminum.



Reel perfection is a GOLDBERG tradition!

GOLDBERG BROTHERS

P.O. Box 5345, T.A. • Denver, Colo. 80217

Laboratory services for Super-8 are continually changing. It is definitely a specialized service, as compared to normal 16-35 laboratory operations. Much of the clientele for Super-8 original production must be educated in how to deal with the lab and how to set up their work for printing. It sometimes appears that we spend as much time answering questions as doing the actual work. This is by no means a complaint. As a matter of fact, we welcome inquiries because this makes the job go through the lab more smoothly. The client is fully aware of what is involved and has a good idea of costs. It is always a shock to a new Super-8 user to see an invoice the first time he uses a professional lab if he hasn't checked the prices before starting. Whenever a new client starts with us we try to explain the costs and what can be expected from a lab. A lot of time goes into producing a quality product and, other than straightforward dupes, each film is given its own special requirements. This costs money and the client must be made fully aware of why these costs are warranted.

We're not often asked to release Super-8 original in 16mm, but it does happen. One of our clients, Peter Elliott of the Canadian Super-8 Centre, asked us to blow up one of his productions to 16mm for simultaneous release with Super-8.

Elliott's client, through B.E.D. Concepts and Communications in Montreal, was the Canadian Post Office. Elliott had made a twenty-minute film in a French and English version for use as a training film in post office installations across Canada. The post office Marketing Department also wished to show the film to volume mail users to explain the Postal Code that was being introduced across Canada.

In an effort to improve quality on a few scenes, we decided to have the original Ektachrome reversal type 7252 (a double Super-8 stock) blown up to a color intermediate negative type 7271.

We sent the original to Film Optical of Canada in Toronto.

At the same time that they did the blowup, color-corrections were made, and, of course, we took advantage of the wet gate in the optical printer.

When the 7271 negative was completed, we did the answer printing at Bellevue Pathé.

To our amazement, the resultant print definitely gained sharpness, both in the 16mm print and in the Super-8 reduction prints that we made. At the same time the grain in the 16mm print was much more noticeable to a degree that would be definitely objectionable

THE FILM SCHOOL™

Once upon a time GREAT BIG STUDIOS made all the IMPORTANT FILMS. It took lots of heavy equipment and lots of heavy people.

Times have changed. Today it's lightweight equipment. Small crews. Independent film-makers.

The Film School is the place to learn independent film-making. Located just 30 minutes south of San Francisco in Half Moon Bay. Students work with award winning professional film-makers.

With only eight students in a class, there's enough 16mm equipment to go around, and instructors have time to help you individually.

Beginners or advanced students. Day or evening classes. But most important, we care about you and how we can teach you techniques it took us years to master. Send for our free catalog:

The Film School,
P. O. Box 907, Dept. C,
Half Moon Bay, CA 94019
or call (415) 726-5537.



**same day
16mm/super 16
DEVELOPING
and PRINTING**
commercial & high speed
Ektachrome
& 16 & 35mm B&W Reversal

**16mm/super 8
ANSWER PRINTS
SWIFTLY FROM
COLOR NEGATIVE
or REVERSAL**

bēbell®
INCORPORATED
MOTION PICTURE LAB DIVISION
416 West 45 St. New York 10036
PHONE: (212) 245-8900
WRITE, WIRE, PHONE FOR PRICE LIST

**16mm/super 8
Internegatives
CRIs
Masters**

**16mm/super 8
release
prints**



Jordan Klein


Specializing in all phases of professional underwater filming and production.

Cameras • Divers • Doubles • Props • Cameraboat • Locations
 Consultation • Custom underwater camera systems • Lighting • Sound

Jordan Klein I.A.T.S.E. #666 • 3131 N.E. 188th St. • Miami, Fla. 33160 • (305) 931-2300 • Telex 51-9352

SUPER HEAD FOR SUPER 8

Incorporates professional features which have made Miller Fluid Heads the choice of the particular cameraman.

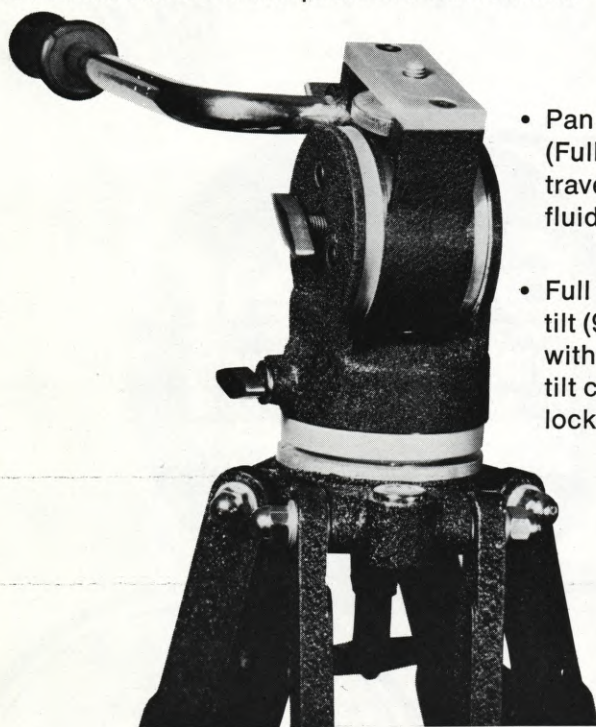

- Pan unit permits (Full 360°) horizontal traverse with full fluid drag.
- Full fluid action tilt (90°), either way, with more positive tilt control and lock in any traverse.



Miller Fluid Heads are available in sizes to accommodate most professional cameras. MILLER TRIPODS, TOO!

Write for catalog.

MILLER PROFESSIONAL EQUIPMENT

6500 Santa Monica Boulevard
 Hollywood, California 90038
 (213) 466-5105

to the trained film-eye. Nevertheless, the resultant 16mm print fulfilled its purpose as a communication tool.

The big bonus was of course the superior quality Super-8 reduction release prints that we were able to get by using the color correction and wet-gate techniques of a 16mm optical printer at the blow-up stage.

The vast majority of industrial use of Super-8 is for small screen presentation. Since the largest screen utilized by industry is only about 15 inches, commercially acceptable prints are feasible by producing on Super-8. Industry in Canada, in general, is much smaller than the U.S. Therefore, budgets for promotions are respectively smaller. Canadian Super-8 producers are proving that low-cost effective films can be produced successfully, even though they may not match their 16mm counterparts. Industry clients want films that can sell a product or service and train their employees at an affordable cost. Super-8 producers are cutting the expensive frills out of their productions in providing films that are clean and to the point. Kodak has finally, after many years of pushing Super-8 into the background, adopted it professionally. They have introduced a complete line of sound-cameras along with new stock and processors. This seems to be their first step toward keeping film competitive with videotape. Flatbed editing equipment, as mentioned before, is now available, as is sync-sound equipment. The Super-8 producer has never had the variety of quality production equipment available to him that he has today. Quality Super-8 professional productions are now being done in ever-increasing numbers. This is one area of film that is creating new markets. In our inflationary times, Super-8 is providing an economical substitute allowing industry with smaller budgets to utilize the benefits of motion pictures. If costs continue to increase steadily, the demand for Super-8 original production will become even more apparent. ■

(ABOUT THE AUTHOR: MURRAY FALLEN is the head of the Super-8 Division at Bellevue Pathé, Canada's largest film lab and sound film organization. He is an active member of the SMPTE 16mm and 8mm Committee, and delivered a paper on the development of Super-8 original production at the Toronto meeting of SMPTE.)

MOVING?

When changing your address, please notify us at least four weeks in advance. BE SURE to give your FORMER address as well as your NEW ADDRESS and ZIP CODE.

AMERICAN CINEMATOGRAPHER

INDUSTRY ACTIVITIES
Continued from Page 1297

release format is in videotape, with 3/4-inch videocassettes leading the distribution format.

The Institute feels that this trend is one facet of Super-8 filmmaking that holds ever-increasing importance, and the hybrid of the two mediums will eventually become a standard procedure to many producers.

The Institute is also forming a library of top samples of Super-8 films, of 1/2-inch and 3/4-inch videocassettes made from Super-8 originating film so that subscribers to the Institute will be able to actually see and evaluate for themselves the results of various film/video techniques. This will help raise the consciousness of people as to what can be done creatively and technically in Super-8/video.

The Institute plans on becoming the "SMPTE" of Super-8, and with the assistance of its subscribers, help dispel many of the current myths against the use of Super-8 film. This will enable more people to realize the potential of Super-8 film as a most viable professional medium unique to itself.

For further details, contact Anne Fox, Information Department, Super-8 Institute, Suite 4-W, 300 West 55th Street, New York, N.Y. 10019.

TEN "FIRSTS" FOR CHICAGO'S 11th FESTIVAL OUR SECOND DECADE!

Ten exciting feature films, never screened in the U.S. will highlight the ELEVENTH ANNUAL CHICAGO INTERNATIONAL FILM FESTIVAL, November 7 to 20th. Two historic theaters will be setting for the showings: The newly-remodeled 800-seat Biograph Theater (remember Dillinger and the Lady in Red?) and the spectacular Granada — a 3,000-seat Thirties movie palace, perfectly preserved with all its nostalgic touches. (Plitt Theatres, Inc.)

Heading the list will be *ONE FLEW OVER THE CUCKOO'S NEST*, in its first film festival exposure, enhanced by the presence of star Jack Nicholson and director Milos Forman.

The Festival Director, Michael J. Kutza, Jr., is presently selecting the 1975 Feature Film jury. Last year the ten-member jury flew in from five countries: Japan, India, Peru, Canada, England, as well as the United States. The jury was headed by South American filmmaker Armando Robles Godoy of Peru, and vice chairperson was Madame K. Kawakita of Japan. ■



FILMING IN EUROPE



TAKE ADVANTAGE OF THE ARRANGEMENT WE HAVE TO ENABLE YOU TO USE YOUR AMERICAN EXPRESS CREDIT CARD FOR EQUIPMENT AND SERVICES SUPPLIED BY

SAMUELSON ALGA • CINEMA-FRANCE

NOW YOU CAN COME TO EUROPE FOR YOUR FILMING NOT ONLY WITHOUT HEAVY BAGGAGE BUT ALSO WITHOUT MONEY WRITE, TELEPHONE, TELEX OR CABLE US ABOUT WHAT YOU NEED AND QUOTE YOUR AMERICAN EXPRESS NUMBER WE WILL THEN PREPARE EVERYTHING YOU REQUIRE AND HAVE IT ALL READY WHEN YOU ARRIVE. JUST HAVE YOUR AMERICAN EXPRESS CARD IN YOUR POCKET AND WE WILL WELCOME YOU LIKE AN OLD FRIEND

SAMUELSON ALGA CINEMA

24.26 RUE JEAN MOULIN VINCENNES 94300 FRANCE

TELEPHONE: 328-50-30 TELEX G7260 F CABLES SAMCINE PARIS
VINCENNES IS SITUATED JUST OUTSIDE THE PARIS CITY LIMITS, JUST ALONG THE ROAD FROM BERAULT METRO STATION



LONDON FOCUS '76

THE ROYAL PHOTOGRAPHIC SOCIETY OF GREAT BRITAIN
with the cooperation of
MODERN PHOTOGRAPHY MAGAZINE (USA)
cordially invite you to London to the unprecedented
Convention, Seminars & Workshop Sessions on
CREATIVE PHOTOGRAPHY
with the most distinguished internationally-renowned
photographers ever to appear together in one event . . .

February
9th-17th

BAILEY DUFFY LICHFIELD NEWMAN
WORTMAN DONOVAN HASKINS MAISEL
PODMORE . . . and others!



Also featuring tour of celebrated Fox Talbot Museum . . .
special private showing from the \$5,000,000 Royal
Society Collection . . . Figure Study Life Session . . .
Photo Tour to unique sites and more! All-inclusive
professional/education (tax deductible) program . . .
plus super-holiday in London for only \$666 complete
(from NY, dbl. occ.) 8 days/7 nights London • RT/British
Airways • Quality accommodations w/private bath •
Sightseeing, Theater, Discounts, Casino . . . much more!

RSVP LONDON FOCUS '76
\$50 deposit per person. C/o GROUP CONSULTANTS INTERNATIONAL, LTD.
Cancel until Jan. 15th. 70 Glen Cove Rd., Roslyn Hts., NY 11577 (516/484-5055)

Send full particulars to:

NAME _____ P20

ADDRESS _____

CITY/STATE/ZIP _____

RESERVE FOR _____ PERSONS.
\$50 DEPOSIT PER PERSON ENCLOSED . . .

TOTAL \$ _____

Direct or non-stop flights 11 U.S. & Canadian cities

A SOUND IMPROVEMENT

AGE Inc. announces two new exclusive products designed to improve your sound recording.



Model Z815 Zeppelin Wind Screen with accessory pistol grip.


Zeppelin Wind Screen

Insures perfect sound recording in all conditions where wind or air movement is present. Aero-dynamic design screens microphone from wind but lets sound in. Weighs only 8 ounces but is virtually indestructible. Can be handheld or boom-mounted.

Model Z815 (for Sennheiser 815 and similar microphones) . . . \$100.00

Model Z415 (for Sennheiser 415, 435 and similar microphones) \$ 85.00

Available from your Dealer or:

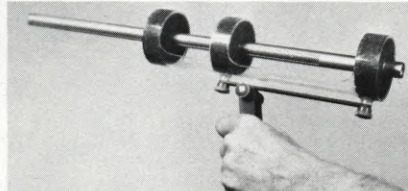

Model M815 Air Cushion Shock Mount shown with Sennheiser 815 microphone.

Air Cushion Shock Mount

Can be used within Zeppelin or as a separate unit. Eliminates noise caused by microphone movement. Polyester foam cushion "gives" easily on impact and returns equilibrium gently, eliminating overspring. Absorbancy maintained over 360°. Can be handheld or boom-mounted.

Model M815 (for Sennheiser 815 and similar microphones) . . . \$ 65.00

Model M415 (for Sennheiser 415, 435 and similar microphones) . . . \$ 45.00

SERVING THE WORLD

alan gordon enterprises inc.



1430 N. Cahuenga Blvd., Hollywood, Calif. 90028

Sales (213) 985-5500 • Rentals (213) 466-3561

TWX: 910-321-4526 • Cable: GORDENT

SUPER-8 EDITING

Continued from Page 1303

fullcoat tracks, the cutting heads are removed and special high-quality heads and additional guides are installed. The new configuration, though more complex than before, reduces any noticeable wow and flutter from playback and recording.

Single-system film (Super-8 or 16mm) can be transferred to a fullcoat track, edited as double-system and transferred back to stripe.

The table incorporates a very high-quality mixing console and frequency equalizers. Consequently, three tracks can be mixed directly to the magnetic edge stripe or (since the picture head also accepts fullcoat) to a master track. Since each 16mm fullcoat strand can also be recorded with edge and center track, conceivably, six tracks could be mixed simultaneously.

Of additional interest is a 35mm clear film band that runs in synchronism with the tracks. This film band passes over a light well and may be used to mark sound cues for mixes without picture.

It is expected that the Schmid will be available in the U.S. by year's end.

Inner Space Systems, Inc. (ISS)

The ISS approach works equally well for 16mm or 35mm film in that fullcoat is not required (though it can be used on suitable recorders). Instead, the editing of the sound track can be accomplished directly from the original 1/4-inch recording via an electronic transfer to a master 1/4-inch tape on another recorder. Since both recorders are electronically locked in sync with the projector, absolute frame-for-frame sync is maintained.

The basic requirements for editing with this system are an ISS modified projector, any number of modified recorders with solenoid-operated pause controls, Cine-Slave for each recorder, and a matching Sensit box for each recorder.

The projector is modified to produce sync pulses and to respond to light reflective tape tabs. These tape tabs provide cue pulses to start or stop the recorders.

The Cine-Slave unit is basically a synchronizing device capable of syncing any one device to any other. The Sensit box is the control unit for the automatic, near-instantaneous starting and stopping of ISS modified recorders during editing. It also governs the recorder operation while the recorder is slaved to the projector via the Cine-Slave synchronizer.

To view rushes with this system, a reflective tape tab is placed on the

slated film frame. Then, the audio slate on the recorder is cued up. The projector is turned on. Then as the tape tab passes the gate, the Sensit activates the recorder on that frame and the Cine-Slave will hold them in sync.

Since the sensors at the film gate are such that one scans the left and the other the right half of the film frame, but alternating from right to left, the tabs are used to turn the recorders on or off at specified frames.

It is this ability to stop and start instantaneously that enables the electronic editing of original sound without cutting tape.

For basic editing, a projector, two recorders, two Cine-Slaves, and two Sensit boxes are required.

The basic editing procedure is as follows. First, tape tabs are placed at the slate marks of the film using, let's say, the left sensor. Then at the location where a cut is desired, an additional tape tab (on the opposite side from the slate tab) is attached. At the tail of the scene (again opposite from head tab) another tab is attached.

Then as the film is run, the first tab (slate) activates the recorder and the second (scene head) stops it. At this point the tape is marked.

Then, the second recorder (master) is put into the recording mode and the original sound tape is cued up at the previously marked start mark. The projector is turned on and run up to speed. As the first tab passes the sensor, both recorders are started. The original recorder plays, as the master records. As soon as the first tab is passed, the master recorder Sensit is switched to the stop mode. This causes the recorder to stop when the second tab passes the projector gate. At this point a frame-for-frame transfer in sync of the desired sound segment has been made. The tabs remain on the film to indicate splice points.

Subsequent cuts are transferred and cued up in the same way. The edited segments are accurately and noiselessly butted with one another.

After the basic sound track has been assembled in this manner, the film is cut in the conventional way and guided by the tape tabs. After this the edited sound track can be run in sync with the picture and final cuts and adjustments are made.

When the editing work is completed, a start tab can activate sync transfer of the edited track to the film's edge stripe.

It is obvious that this editing method requires many projections of the film. Consequently, workprinting is a must and original film editing out of the question. There is no Super-8 pro-

Gordon Yoder, Inc.
FORMERLY
PROFESSIONAL CINE PRODUCTS, INC.

2840 REWARD LANE, DALLAS, TX 75220 P.O. BOX 20296 (214)/357-3045 or 357-2725

EXPERT

QUICK SERVICE

REASONABLE PRICES

**REPAIRS ANGENIEUX ZOOM & FIXED
FOCAL LENGTH LENSES.**

SERVICE BY ANGENIEUX TRAINED TECHNICIANS USING

GENUINE ANGENIEUX TEST EQUIPMENT AND PARTS

**THE ONLY SUCH REPAIR FACILITY IN THE MIDWEST AND
SOUTHWEST. SEND YOUR LENSES TO US FOR ESTI-
MATE. Also work on all other lenses.**

MOTION PICTURE EQUIPMENT SALES & SERVICE OVER 22 YEARS

**GET THE BEST
WITH THE BEST**



4.2L SYNCHRONOUS 1/4" TAPE RECORDER

NAGRA RECORDERS


The NAGRA 4.2L is the standard of excellence for recording original motion picture production sound tracks. Internal plug-in modules, installed as required, consist of various microphone preamps, crystal generator, self-resolver, camera speed indicator and automatic level control.



United States Distribution — Service — Sales

NAGRA MAGNETIC RECORDERS, INC.
19 WEST 44th STREET, ROOM 715 • NEW YORK, NEW YORK 10036 • (212) 661-8066

Southern California Sales and Service RYDER MAGNETIC SALES CORP. 1147 North Vine St., Hollywood, California 90038 (213) 469-6391
Available in Canada BRAUN ELECTRIC CANADA, LTD.




CRYSTALOK... Crystal Motor Controller for Arri 16-BL

FEATURES:

□ Crystal sync speed of 24 fps (25 fps for cameras geared for that

speed) and variable speed over a range of 14 to 48 fps. □ Accuracy in sync mode: ± 15 parts per million over temperature range of 0° to 140°F. □ Extremely compact, projects only 1½" beyond Universal motor housing when installed. □ Light-weight — weighs only 14½ oz. complete with bracket and cable. □ Out-of-sync warning light flashes whenever camera is not running at preset speed both in sync or variable speed mode. □ The Crystalok crystal controller slips over the end of the Arri 16-BL Universal motor housing and is held in place by three thumb screws. □ Uses standard Arri 16-BL 12 volt power supply.

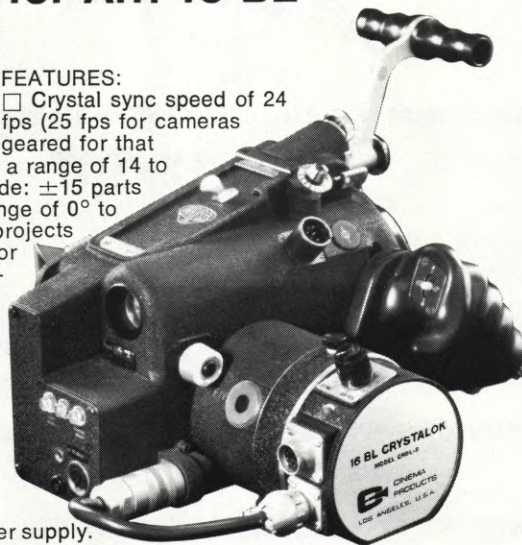

For further information write to:

cinema E products
CORPORATION

Technology In The Service Of Creativity

2037 Granville Avenue, Los Angeles, California 90025
Telephone: (213) 478-0711 ■ Telex: 69-1339 ■ Cable: Cinedevco

The London International Film School

Britain's famous London International Film School with a worldwide reputation for excellence in practical film-making, invites intending students to apply for registration.

The intensive two year Diploma Course in applied film-making continues. It is designed to make graduates fully professional in their creative work. It will also be extended to include a full-time Diploma Course in Video.

The school is situated in Covent Garden, in the center of the West End, at the heart of London's cultural activities.

All tuition is given by practising film-makers who are faculty members.

The January course starts the 12th. Write to the Student Councillor Dept., London International Film School, 24 Shelton Street, London WC2H 9HP, England.

jector made that won't scratch the film after a few passes.

If a mix is desired, one Sensit box, one Cine-Slave, and one recorder would be required for each sync track. Again activated by the tape tab, these recorders would run in sync with the projector and could be patched through a mixer. The mixed audio track could then be transferred directly to the edge stripe of the film or to another synced recorder for a master track. The mix would be done to picture.

The advantages of this system lies in its economy and quality, if not in speed-iness of operation. No question about it, it is a slow process. However, the same Cine-Slave that synced the projector to the recorder can also be used to sync the camera to the recorder during a shoot. Unless you are using full-coat recorders rather than ¼-inch machines, you never get involved with fullcoat at all. Consequently, the sound should be better.

Individual components are priced as follows. Cine-Slave units about \$350.00. Sensit boxes \$125.00 to \$330.00 depending upon recorder. Projector modification about \$165.00.

Editor-Viewers:

Out of the fifty or more viewers made for Super-8 use, only a very few can really be trusted with original film. Viewer design seems to follow the perverse notion that the ability to see the picture is unimportant and that no one cares whether or not the film gets scratched.

Based on our experience, the following viewers are acceptable: the Minette S-5, the Hahnel VB-214, the Elmo 912, the HKS projecto editor. They all cost around \$100.00.

The Elmo and the HKS can be fitted with an optional 18 frames offset sound head/amplifier for single-system editing. Frame counters and cleaning attachments are also available. The HKS actually projects the image on a small boxed-in screen and gives about the sharpest picture. The Hahnel with its V film guide provides a very sharp picture and is a snap to thread. It is very gentle on film.

The Minette S-5 has been the real workhorse of Super-8. Super-8 Sound, Specialties Design, and Super 8 Research, all have incorporated this viewer into their editing systems. It is easy to understand why. The viewer is well balanced with most of its weight on the bottom. Coupled with rubber feet, this makes it rock steady. Unless grossly misused, the Minette never damages film. It has a very bright and very sharp viewing system that is easily modified to accept the Phillips 10-watt

quartz lamp for even greater brightness.

For some reason, Super-8 viewers are designed to punch out the edge of the frame to indicate cuts. There is no way to use grease pencil because the gates are all enclosed. Some system of less permanently marking frames would be welcomed. Of course punching the edge is still better than perforating the middle of the frame, as some viewers do.

All viewers allow frame adjustments, focus, and inching. Of course, most of the controls for these adjustments require watchmakers' hands. They are incredibly small and, in some instances, inconveniently placed.

Splicers:

There are almost as many Super-8 splicers as there are cameras. Only a very few, however, are worth anything.

The best cement splicers are the Bolex and Hahnel. Both make low visibility and low noise splices. Each end of the film is bevelled so that a well-made splice is not much thicker than the film itself. This is very important if the film is to be striped for sound. Splices made without bevels suffer dropout at every splice. They also chatter horribly when they pass through the projector.

Both splicers can be used to splice A&B rolls, though the Bolex must have the regular 8mm guide pins removed. Neither splicer is heated, but the Bolex can easily be modified with a 10-watt/1500 ohm resistor. Both splicers also grind rather than scrape the film. This causes film dust to scatter all over the place and creates a cleaning problem. After about 50 splices, the Bolex film cutter blade gives out. After that a razor blade must be used. Bolex about \$57.50. Hahnel about \$49.95.

The Maier-Hancock model 816-S is a formidable splicer with a clean scraping blade and 100°F heated block. It is the best, fastest, cleanest, and easiest splicer to use in preparing Super-8 A&B rolls. Because it does not make bevelled splices, its use for projection or sound-striped film is limited. The splicer converts for 16mm use. \$350.00.

Other professional hot splicers for Super-8 are made by the Hollywood Film Co. and by Harwald.


Tape splicers are abundant. The cheapest and most useful for both picture and fullcoat is the \$20.00 Guillotine. This splicer uses unperforated mylar tape. It is a wraparound splice covering two frames and does not cover the sound stripe. Cost per splice is less than 1¢. It is most useful for work print because the splices are easily unmade. A metal semi-pro model is

THE NAGRA EXPERTS MAKE THE DIFFERENCE

Since the introduction of the Nagra Recorder to the United States, Our skilled technicians have been servicing, modifying, updating and developing new accessories for this sophisticated recording instrument.



AUDIO SERVICE COMPANY
565 FIFTH AVENUE
NEW YORK, NEW YORK 10017
(212) 972-0825

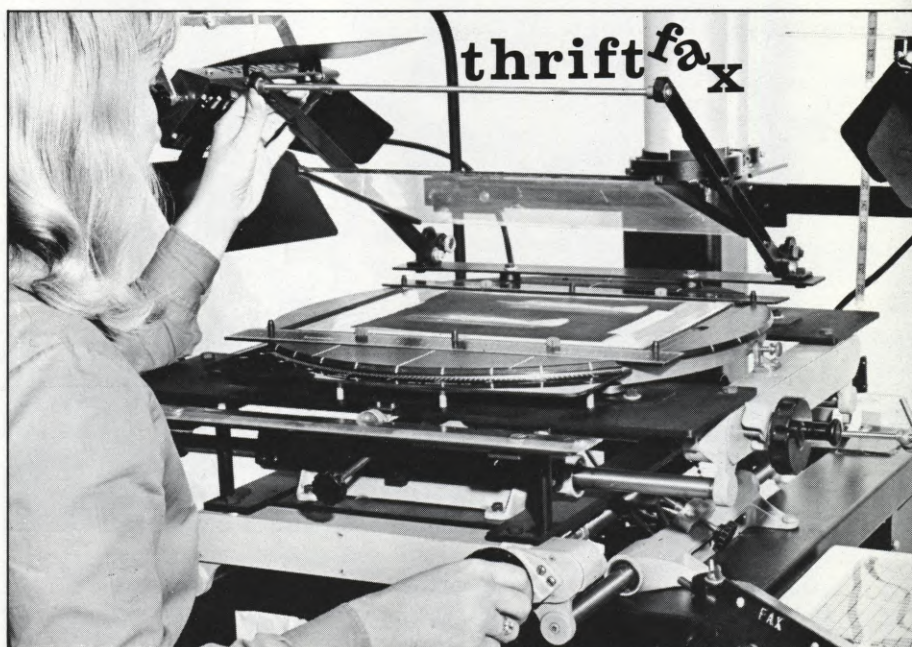

for ANIMATION/TITLING/FILMSTRIP: the thriffax camera stand:

Accurate. Versatile. Moderately-priced. Made and guaranteed by FAX Company, producer of the first/only **combination 12/16 Field Disc**, used in the thriffax stand — and available separately. Ask for full details. ■ Animation Cameras — Single-Frame Drives . . . Animation Supplies: Tell us your needs or ask for price-lists.

FAX COMPANY

374 S. Fair Oaks Ave., Pasadena, Calif. 91105-213/681-3084



ECO - 7390 The ultimate film reproduction in sharpness, color & silversound

ECO - EF 7389 Excellent low contrast print rendering with silversound for TV or projection.

16mm EKTACHROME ECO 7252

16mm ME-4 PROCESSING

16mm COLOR WORKPRINTING (1 Day Service)

16mm RELEASE PRINTING 3400K - 5400K

16mm OPTICAL SOUND TRANSFER

16mm SILVERSOUNDTRACK APPLICATION

16mm ULTRASONIC CLEANING

16mm CREATIVE EDITING (Kem Table)

16mm CONFORMING A&B ROLLS

16mm CREATIVE SOUND PRODUCTION (Interlock)

16mm POSTFOGGING OF EF

16mm TITLES & ART WORK

16mm OPTICAL PRINTING

CHANNEL 8 COLOR LABS

905 JACKSON STREET/P.O. BOX 1410

TAMPA, FLORIDA 33601/813/229-7781



At Ronson Aviation One Call Does It All for Helicopter Aerials

Ronson Aviation helicopters arrive at the scene with stabilization systems, cameras, zooms, magazines, filters, Com systems, windscreens and power packs ready to shoot. Our professional pilots have the experience to minimize shooting time costs. They know how to get in tight and hold position — all the tricks that minimize retakes.

Helicopter fleet and fixed wing aircraft available.

Northeast Distributor for Tyler Camera Systems.

Fast accurate estimates.

Call Ronson soon. Or write for our price/equipment list.

RONSON AVIATION

a subsidiary of **RONSON** Corporation

Mercer County Airport, Trenton, New Jersey 08628

NEW YORK: (212) 431-3930 NEWARK: (201) 636-3600 TRENTON: (609) 771-9500

available for \$39.95 and an even more rugged pro version for \$275.00.

For fullcoat splicing, we load the same \$20.00 plastic model with 3/8-inch opaque audio splicing tape. This tape is highly visible on the fullcoat and strong enough to be taped only on the base side of the fullcoat. Cuts are completely noiseless.

An excellent new tape splicer is the HPI and uses T-8X perforated quick-splices. It covers four frames and is very strong. The splicer is unique in that it cuts the film, positions it, removes the paper backing, and applies the splice to both sides of the film. Very little handling occurs, reducing the chance of trapping dirt under the splice. It is good splicer for original projection or for Super-8 to Video transfers. The splicer costs about \$30.00 and splices run about 2.5¢ each.

Other useful tape splicers are made by Fuji Photo and by Eastman Kodak.

If you are working with polyester-base film and you don't want to tape-splice, the only option is the Metro-Kalvar portable ultrasonic splicer. It costs \$1500.00 and does not work very well on acetate-based films.

Synchronizers:

High-quality Super-8 sync blocks are manufactured by Ediquip, Inc., Hollywood Film Co., Inc., and Magna-sync/Moviola Corp. The synchronizers are constructed the same way as their 16mm and 35mm brothers and cost about the same.

The following options and configurations are available, though not from each manufacturer. Available are: 1-6 gangs, various gangs may be declutchable from the others, front or rear-facing sprocket placement, sound readers, front and rear footage counters, 24fps sync motors, frame indicator plates, timers, and gearing for Super-8/16mm combinations.

Miscellaneous:

Although most Super-8 flatbeds are designed to be used with film reels, some can also handle film and fullcoat on cores. To wind the film on the cores requires a tight wind. Hollywood Film Co. makes one and Leon Flohl of New York City custom builds them. Split reels to handle the cores are also available from Hollywood Film Co. and from Comprehensive Service, Inc.

Neumade Products Corp. manufactures brass shaft adapters to adapt Super-8 reels for the standard professional rewinds. They also make a single hub footage measuring machine for Super-8 film.

16mm film bins are not suitable for

BOLEX 16mm cameras and projectors
COMMUNICATION ARTS
crystal sync equipment
ECLAIR 16mm and 35mm cameras
LEE FILTERS lighting control media
MAGNASYNCH 16 and 35mm studio
recording equipment
MOVIOLA 16-35mm editing equipment
PYRAL recording tapes
RDS studio lighting equipment
STELLAVOX quarter inch recorders
 contact the **PROFESSIONAL DIVISION**
 **W. CARSEN CO. LTD.**
 31 SCARSDALE RD • DON MILLS • ONT • M3B 2R2
 TORONTO 444-1155 MONTREAL 488-0917

When you say one lab processes your film, "better" than another, you're really saying that somebody isn't doing their job, because in the lab business there is only one way to process, edit, conform, print, transfer, mix, or post flash — the right way. At CPT FILM LAB, your job is done the right way the first time which means we have the time to concentrate on service, on the personal touch. When you call or stop by CPT, you talk to the people who actually handle your job. We deal with people, their projects, and their problems. Our staff is composed of lab professionals — but we've also spent our share of hours behind the cameras so we can speak your language. If service and quality are what you're looking for in a 16mm lab, write or call for your copy of our new catalog/price list.
 — phone —
919/688-7265 **CPT FILM LAB**
639 WELLS VILLAGE
DURHAM, NC 27703

QUALITY 16mm PRINTS
 OUR SPECIALTY

Satisfied customers coast to coast
B&W • Kodachrome • Ektachrome
Color Interneq • Positive

TEKNIFILM, INC. 1923 N.W. Kearney St.
 Portland, Oregon 97209
 (503) 224-3835

2 GREAT CINE BOOKS
 By Joseph V. Mascelli, A.S.C.

THE FIVE C's OF CINEMATOGRAPHY
THE CLASSIC CINE TEXT

FIFTH BIG PRINTING \$15 Postpaid


MASCELLI'S CINE WORKBOOK

Up-to-Date Text; Cine Tools, Tables
& Calculators in BOTH Feet & Metric
INCREDIBLE VALUE \$20 Postpaid

10-DAY TRIAL OFFER! FREE BROCHURES!
 Calif. add 6% Tax. Foreign add \$1 per book.

CINE/GRATIC PUBLICATIONS
 P.O. BOX 430 HOLLYWOOD, CALIF. 90028

CANADA'S LARGEST
LAB AND SOUND
FULL SERVICE
ORGANIZATION



MONTREAL 2000 Northciffe Ave.
 Montreal, Que. H4A 3K5
 Tel. (514) 484-1188

TORONTO 9 Brockhouse Road
 Toronto, Ont. M8W 2W8
 Tel. (416) 259-7811

*A DIVISION OF ASTRAL BELLEVUE PATHE LTD./LTEE

Super-8 unless their film hanging pins are exchanged with thinner ones to accommodate the smaller super-8 sprocket hole. Only one firm offers a film bin suitable for Super-8 (as well as for 16mm and 35mm). The Roto Bin, manufactured by the Communicators, Inc. uses non-magnetic clamps to hold the pieces of film and fullcoat. Though very handy with its magnifying glass, illuminated drum, and rotating film carousel, the Roto Bin is also quite expensive: \$395.00. The company is planning to market a more austere model in the near future.

Super-8 Magnetic Fullcoat:

Like it or not, Pyral Super-8 fullcoat is the only quality fullcoat readily available in the U.S. It seems a little strange that more options don't exist; particularly since virtually all Super-8 editing systems rely on it.

Other brands do exist (usually cheaper), but beware before you stock up. The dealers won't tell you who made the stuff, and it's been our experience that most of these off brands are inferior to Pyral. The main problem has been frequent and severe dropout. Some others completely gunk up the recording heads.

A gripe with respect to Super-8 fullcoat is its price. Granted that not as many feet of it are in use as 16mm, but is that enough reason to charge twice as much as 16mm mag? In some cases, dealers are charging \$45.00 for a 1200-foot roll. According to a company spokesman, Pyral is wholesaling Super-8 fullcoat at the same price as 16mm and by 1976 they expect to reduce the price significantly. Fair prices in quantities of 10 1200 ft. rolls or more should not exceed \$28.00 per roll.


Most likely 3M will manufacture Super-8 fullcoat in the near future. It will be a completely new formulation with higher quality than Pyral. Hopefully the price will be lower as well.

Super-8 Edge Numbers:

With all of this wonderfully sophisticated hardware, it seems that professional editing of Super-8 film has come of age. Almost. There is still one problem crying out for a solution. That is effective coding of original, work print and fullcoat.

True, a fairly large amount of Super-8 is cut in the original. However, the best results still require work printing and subsequent conforming of the original. Currently only three labs across the country offer edge-numbers for original and work print. No one is able to code Super-8 fullcoat.

Even the edge numbers available are

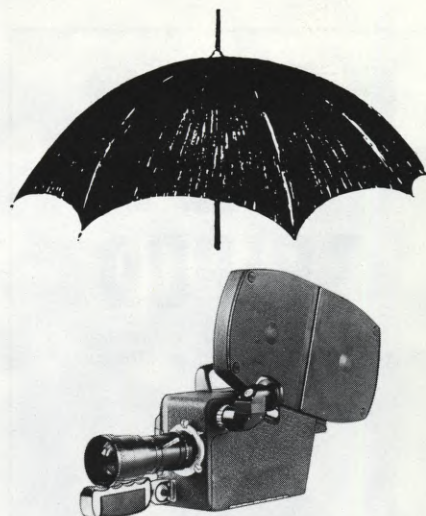

all under one
umbrella
MOTION PICTURE
EQUIPMENT
SPECIALISTS

the **BRENNER CINE-SOUND** organization covers every aspect of Cinematography equipment. Under our umbrella we have a unique team of personnel and services, backed by many years of expertise related to Sales, Service, Rentals and Repairs.

■ Whether your requirements are: Cameras, Lenses, Motors, Magazines, Tripods, Power Supplies, Lighting, Editors, Meters, Projectors, Tape Recorders or Screens **BRENNER CINE-SOUND** has it in stock with product names such as:

- | | | |
|-----------------|---------------|------------|
| Angenieux | Eclair | Neumann |
| Arriflex | Electro-Voice | O'Connor |
| Arrivox | Guillotine | Oxberry |
| Beaulieu | Magnasynch | Permacel |
| Beyer | Maier-Hancock | Revox |
| Bolex | Miller | Sennheiser |
| Canon | Minerva | Shure |
| Cinema Products | Moviola | Spectra |
| Colortran | Nagra | Sonorex |
| | | Zeiss |

For more information on Motion Picture Equipment, Sales, Service & Rentals, call or write

5215 Wisconsin Ave., N.W., Washington, D.C.
20015 (202) 244-3800

BRENNER
CINE-SOUND

Div. of Ritz Camera Centers

Please mail me additional information:

Service Sales Rentals

Name _____

Address _____

City _____

State _____ Zip _____

FOBA TRIPOD

Selected for use in filming
the 21st Olympiad at Montreal



The Foba tripod is an all-metal professional motion picture tripod with a Pro Jr. flat-top plate which accepts Pro Jr., O'Conner C and 50, Miller F and Pro heads. Made in Switzerland by precision craftsmen, the Foba features unique tubular adjustable legs which allow the tripod to be used in standard or baby positions. Foba comes complete with triangle-type leg locks and elevating riser plate. Maximum height is 62"; with riser, 73". Minimum height, 18½". Weight, 16 lbs.

FEATURES:

- Adjustable riser plate.
- Patented individual adjustable legs.
- Triangle-type leg locks.
- Individual or simultaneous adjusting of legs.
- Modularly constructed for easy repair or parts replacement.
- Weatherproof.
- Combination rubber and spiked tipped legs.
- Flexible leg adjustment for shooting of uneven terrain.

Price: **\$325.00**

Available Exclusively From:

alan gordon enterprises inc.

1430 N. Cahuenga Blvd. Hollywood, Calif. 90028
(213) 466-3561 / (213) 985-5500

TWX: 910-321-4526 • Cable: GORDENT

not the best that could be. They generally follow 16mm spacing (too far apart) and, in some cases, the yellow ink has been known to bleed or splash into the frame area. What's more, the service takes forever.

If someone out there is looking to make an investment, he should design or sponsor the design of a Super-8 edge-numbering machine for routine lab use. The machine should be able to clearly and cleanly code single-strand Super-8 original, work print, and full-coat. The spacing should be about 20 frames.

Conclusion:

The editing of Super-8 film and sound has reached a very sound and practical level. Many systems exist; some mimicking 16mm practice and others following totally unique approaches. In many instances, the editing systems provide a flexibility of use not found in the 16mm world. The ability to adapt the editing machines to multitrack sync sound mixes is probably the most outstanding example of that trend.

All of the hardware is well past prototype and much of it is already in field use. New dramatic innovations probably won't appear for a while, as manufacturers refine and improve the existing systems.

It is hoped that film makers using this new equipment will not suffer passively if problems develop or they find certain aspects of the systems troublesome and inefficient. All criticisms, comments and suggestions should be forwarded to the manufacturers. They need this field data badly. Manufacturers actively solicit this feedback from all equipment users.

(ABOUT THE AUTHOR: GUNTHER HOOS and his partner Mark Mikolas founded the Super-8 Film Group, a New York production house that works in Super-8. He has published many articles on Super-8, including a special report on Super-8 at Photokina '74, and is a co-author with Mikolas of Handbook of Super-8 Production, scheduled to be made available very soon by United Business Publications, the publishers of Video Handbook.)

JOHN BARRY
GROUP OF COMPANIES

SALES—SERVICE—RENTALS



105 Reserve Road
Artarmon, N.S.W. 2064
Sydney, Australia.
Telephone: 439 6955
TELEX: 24482

HIGH
PRECISION
sprockets
FOR DRIVING
PERFORATED
FILMS • TAPES • CHARTS

?

LaVezzi



HAS THEM ALL!

- 8 MM Wafers, full size for tapes or films.
- SUPER 8 Double width Printer Sprocket-Feed Sprocket.
- 16 MM Single row. Double row. Wafers. 8 Tooth thru 20 Tooth.
- 35 MM Standard C'Scope, Regular Tooth. Positive Control. Low Inertia. Intermittent, Drive. 8 Tooth thru 64 Tooth. Aluminum, Steel, Stainless Steel, Plastic.
- 70 MM TYPE I and II
- 1/10" PITCH TAPE DRIVE Sprockets 1" wide. 10 Tooth thru 50 Tooth Tape Reader Sprockets Stainless Steel, Plastic.
- 1/4" PITCH CHART SPROCKETS Aluminum—Plastic 10-12-24 Tooth Assemblies.
- 3/8" PITCH CHART SPROCKETS Aluminum.
- 1/2" PITCH CHART SPROCKETS Aluminum, Assemblies.
- AND SPECIALS TO ORDER Tell us the problem and/or send us your Specs for quote. We make special sprockets for almost any type of perforated material.

LaVezzi

machine works, inc.

900 N. Larch Ave.,
Elmhurst, Ill. 60126
(312) 832-8990

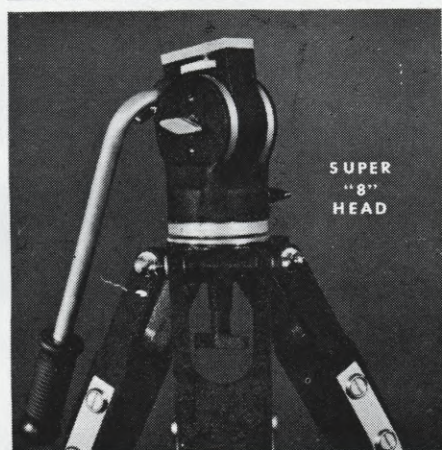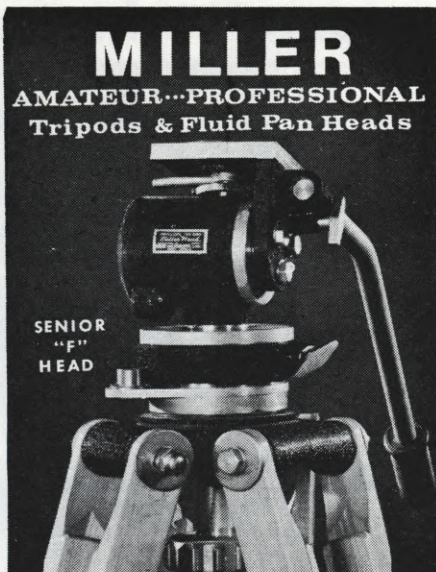

SENIOR "F" HEAD

- Complete control for smoother panning in both horizontal and vertical position.
- No shake or jitter.
- Full 360° horizontal movement.
- Varied use with: Bell & Howell—Bolex—Arriflex—Cine Special—F & B Auricon—Telescopes, etc.
- Either right or left hand operation.
- No backlash.
- Adaptable to all types of tripods.
- WHATEVER CAMERA you use—you will get better results with a MILLER HEAD.

AT LAST A NEW FLUID PAN HEAD FOR SUPER 8 CAMERAS

- Camera mounting screw 1/4".
- Pan and tilt packed with special fluid and factory sealed.
- Height 5", weight 32ozs.
- Ball Leveling tops available.
- Miller Equipment is used throughout the world by leading photographers, film and television studios.

Write for a free Brochure and prices on all Miller tripods and accessories.
DEALER INQUIRIES WELCOME.

CANADIAN DISTRIBUTOR



Leo's
CAMERA SUPPLY LTD.

1055 GRANVILLE STREET
VANCOUVER 2, B.C.
TELEPHONE: (604) 685-5331

DECADE OF PROGRESS Continued from Page 1254

cameras in use in this country.

For all of these people, there are many choices to make after they decide to originate in the Super-8 sound medium. What equipment do they need? Which film should they use? How should they record sound and edit?

To answer these questions, it's necessary to define the mission. Where will the film be produced, and particularly, what will the lighting conditions be like?

Is it important to record sound on location or would it be more effective to add a narration, music and perhaps effects later? Of course, you should also know in advance how the film will be used.


Many cameras provide a choice between recording 18 or 24 frames per second. The first will lower film and processing costs by 25 percent and it will also make it possible to compress the action shown during a specific amount of time. These can be important considerations. However, first make certain that you will be using a projector which operates at 18 frames per second if your playback medium is going to be television.

Other features to look for when selecting a Super-8 camera include: Is it lightweight and easy to hand-hold? If it's cartridge-loading, can it be used with existing-light films such as Kodak Ektachrome 160, Ektachrome EF 7242 and Ektachrome SM 7244 films? Does it have a built-in type A filter, which will be needed for switching from exposure under tungsten light to daylight? And, finally, the availability of a zoom control is very desirable for producing small-format films with a professional look.

There are currently several cameras now capable of recording single-system sound on prestripped film, including the Kodak Supermatic 200 sound camera. The Supermatic 200 camera operates at either 18 or 24 frames per second and can be used with both 50- and 200-foot-capacity film cartridges.

The main question that brings up is whether or not you will be filming events which might require you to record film and sound at 24 frames per second without interruption for up to 10 minutes at a time? If so, the Supermatic 200 camera can provide that capability, along with the flexibility of also using the 50-foot cartridge when that is desirable. When you are considering this, remember that these are

NEW!

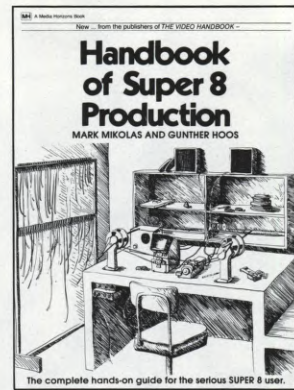

It's here!!!
The definitive
book on Super 8
that filmmakers
(and would-be
filmmakers) have
been waiting for ...

- The first — and only — book to synthesize technology and the practical experience needed to conceptualize, produce and release films in Super 8
- Designed as a user's manual — with clear, detailed exposition and illustration
- Teaches readers how to set up a complete Super 8 studio — with sound advice on which equipment, supplies & services you really need
- Written by Mark Mikolas and Gunther Hoos, pioneers in Super 8

Published by UNITED BUSINESS PUBLICATIONS, INC.

A Subsidiary of Media Horizons

Publication date: Dec., 1975

Price: \$13.50 (softbound)

HANDBOOK OF SUPER 8 PRODUCTION
c/o UNITED BUSINESS PUBLICATIONS
750 Third Ave., N.Y., N.Y. 10017

Please send me _____ cop(y) (ies) of the HANDBOOK @ \$13.50 each (plus 50c postage & handling).

Enclosed is my check (money order) for \$_____.

Please bill me.

Please bill my company

Name _____

Company/Org. _____

Address _____

City _____

State _____ Zip _____

Signature _____

Date _____



the
proof
is in
the pro-
cessing

When Kodak came up with Color Negative II, Houston Fearless came up with a new Advanced Colormaster to handle it.

So did a lot of other people.


But ours was *proven* even before it was assembled.

Because it contains the same tried and true components as Houston Fearless processors for color positive, reversal, and intermediate films, and black and white motion picture film and microfilm.

Altogether, that represents millions of miles of film processed reliably with top quality results.

For full details on Advanced Colormaster processors for all types of motion picture film, just write or give us a call at (213) 479-3941.

We'll send you more proof.



Houston Fearless®
PROCESSORS



Technology Incorporated

11801 West Olympic Blvd., Los Angeles, California 90064

cartridge-loading cameras which take only seconds to reload.

That's one of the major production advantages of Super-8 filming. There is practically no setup time, and there is also a great deal of mobility. Each of the three existing-light films mentioned earlier have a recommended exposure index of 100 in daylight (using a type A filter) and 160 in tungsten illumination. All of the films are available, both silent and prestriped, in 50-foot cartridges; however, only Ektachrome EF 7242 and Ektachrome SM 7244 films can be purchased in 200-foot cartridges, silent and prestriped.

The film speed combined with the fast f/1.2 lens and 230 degree shutter angle on the Supermatic 200 camera makes it possible for producers to work without the aid of artificial illumination in most situations. Furthermore, the automatic exposure feature will generally provide for a uniformly well-exposed end product. The main thing to watch out for in this last regard is backlighting. For example, light coming in from a window in the background can fool an automatic exposure meter and result in a badly underexposed foreground. The manual override on the exposure control will allow you to adjust for backlighting.


Another thing to keep in mind is that your film will most likely be shown on a comparatively small screen. As a result, an establishing long shot, which could be very effective in the 16mm format, could result in such tiny images in the background that they would be indistinguishable on a small screen.

The cure is simple. Work in close and focus on an image that will fill up the screen. You can still produce a visually interesting movie by occasionally panning slowly, using your manual zoom control (the Supermatic 200 camera has a 9mm to 21mm zoom lens) and by frequently changing the perspective of your camera to the subject. Most of your editing can be done right in the camera.

Your choice of films will be dictated mainly by your plans for recording single-system sound and also by the sources of film processing most available to you. In most parts of the country, Ektachrome 160 film, which was first introduced to the amateur market, can be processed within 48 hours. Some of the photofinishers equipped to machine-process this film might also be willing to negotiate special arrangements for making even faster deliveries.

Ektachrome EF film 7242 (tungsten) is most commonly used in the 16mm format for newsfilm work by com-

EXPERT NPR ser- vice

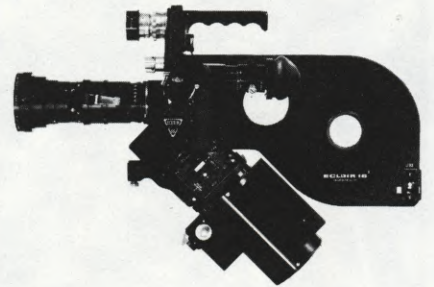

**Eight years experience
with Eclair cameras:
Bodies, Motors, Lenses**

FACTORY TRAINED

**We also have trained
Arriflex specialists**

SABA CAMERA SERVICE

(213) 469-1551; (213) 469-2935

**6572 Santa Monica Blvd.
Hollywood, Calif. 90038**

WESTERN Cine

FULL IMMERSION
WET GATE
PRINTING

16mm to 16mm
16mm to 35mm
Super 16mm to 35mm



EASTMAN COLOR
INTER-NEGATIVE
and POSITIVE
16mm & 35mm

16mm PROCESSING
ECO, EF and CRI

- Video Analyzing
- Sound Recording and Mixing
- Optical Printing
- Titling
- Super 8mm Reduction Printing
- Filmstrip

*We are a quality-oriented lab...
Computerized printing...
Contact our producers' service
specialists...
We do the job right!*



DENVER
312 So. Pearl St. - Denver, Colo. 80209
Cine Craft
8764 Beverly Blvd. - Hollywood, Calif. 90048

WC 5

mercial broadcasters all over the nation. Many of these broadcast stations will provide high-quality fast service to outside customers, and this is a big advantage to filmmakers working with this product. Many commercial laboratories already are equipped to process this film in the larger format, so fast service shouldn't be a problem anyplace.

Sometimes, however, you may want access to the processed film in a matter of minutes. When you're using a film such as Ektachrome SM film 7244 (type A), this immediacy is possible with the Kodak Supermatic 8 processor.

This compact processing machine accepts 50- and 200-foot cartridges of film and can be operated in room light by practically anyone. Using the Supermatic 8 processor, you can have a 50-foot roll of film ready for viewing within 15 minutes after loading the unprocessed film into the machine.


There also are other alternatives regarding the selection of film. For example, some smaller television stations using Super-8 film rely upon the slower but much sharper and finer-grained Kodachrome 40 film (type A) or Kodak Ektachrome 40 movie film (type A) for producing commercials. Both of these films have an exposure index of 25 (using a type A filter) in daylight and 40 under tungsten illumination.

Because of their relatively slow speeds, you'll probably have to use some sort of artificial illumination when shooting indoors. This could be done by simply handholding a tungsten-balanced spotlight. However, for optimum lighting, three lightweight stands, each holding a tungsten-balanced 650-watt bulb, can be used with great effect. Place two of the lights on either side of your camera and the third to one side and to the rear of the subject (out of the shooting frame, of course). This should give you a well-lighted subject without shadows and with good depth of field.

Another thing to remember during planning is that you have a tremendous amount of flexibility in recording sound on a magnetic track. Single-system sound should generally be recorded whenever you are filming interviews. This technique can also be used when the cameraman's or reporter's on-the-spot observations are important. For example, an insurance investigator at the scene of an accident might want to record his on-the-spot observations, as well as other people's comments.

Appropriate background sounds can also add a great deal of authenticity to a film. These, however, don't necessarily have to be recorded on the stripe at the

angénieux offers the widest selection of zoom lenses

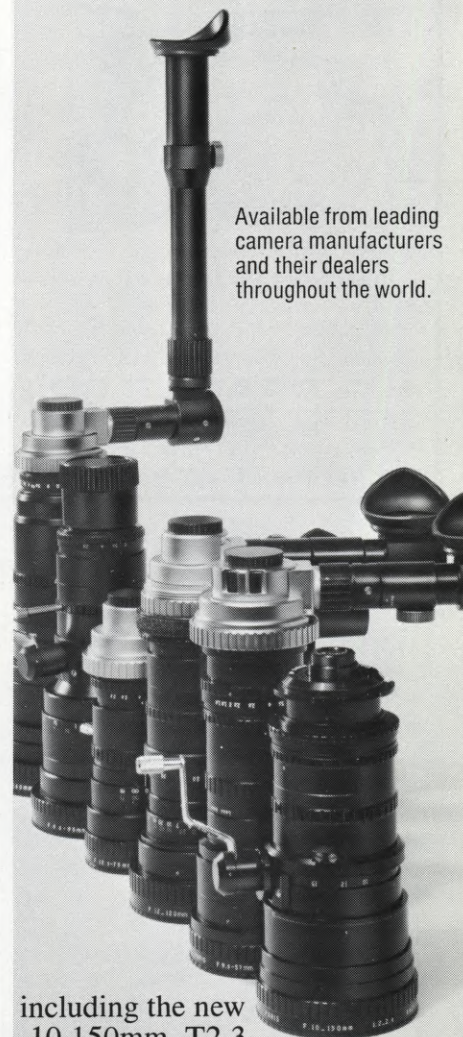

Available from leading camera manufacturers and their dealers throughout the world.

including the new
10-150mm, T2.3,
9.5-57mm, T1.9/2.2,
12-240mm, T4.2 and
of course, the standard of
the motion picture industry,
the 12-120, T2.5.


angénieux

corporation of america

ISLIP AIRPORT, BOX 340, RONKONKOMA, N.Y. 11779
(516) 567-1800
13381 BEACH AVE., VENICE, CALIF. 90291
(213) 821-5080
FOR SERVICE (516) 567-2424

INTRODUCING
the
CRAMER MARK IX
Super 8 Processor

This new addition to the Cramer line will process B&W reversal, negative and positive. The all Super 8 unit is variable speed, processing up to 16 FPM for B&W reversal. As with all Cramer units, it is small, compact and versatile. The ready to run price is only \$2390.00. Write or call for further information.

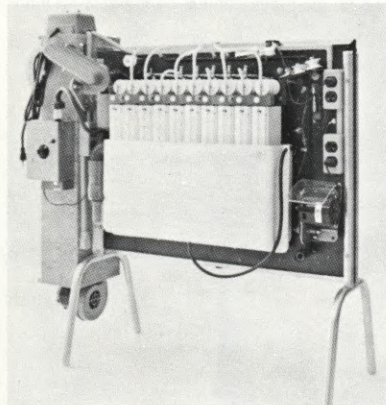


H.G. CRAMER CO.

ROUTE 3, BOX 24A
SARASOTA, FLORIDA 33580
TELEPHONE: 813/355-4470

mail order service

- Laboratory
- Recording
- Music Scoring
- Special Effects
- Animation
- Editing
- Titles

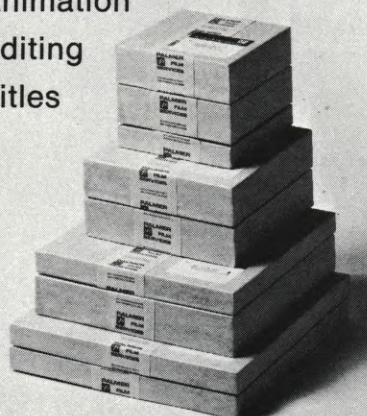

W. A. PALMER FILMS, INC.
611 HOWARD STREET • SAN FRANCISCO, CA 94105
San Francisco's complete 16 mm film service

time of shooting. In fact, there is a good argument for recording background sounds with a portable audiotape player. This can facilitate mixing location background sounds with voice-over narration recorded after observing the film.

Adding this sound track after the film is processed is then a simple matter. If a prestripped film is used, you are ready to record as soon as the film is processed. If nonstriped film was used, a magnetic stripe can be applied by many processing laboratories.

Then, it's as simple as loading the film into a Kodak Supermatic 70 sound projector and transferring sound from a tape player onto the film's magnetic track. A film can consist of a combination of single-system on-location interviews and a voice-over narration.

While there are various options to consider in the making of a Super-8 color-sound film, one statement can be made with absolute certainty: The dream has become reality. Super-8 sound movies are a viable medium for today.

TRANSFERRING SUPER-8
Continued from Page 1313

The sound was transferred in sync from a fullcoat Super-8 mag track.

Two hours after they walked in the doors of National Video with their Super-8 elements they had a two-inch Quad videotape master of both a 60-second and a 30-second spot. One hour after the two spots were approved by the client, they had all their tape dubs ready to send to the various television stations.

Another interesting use of Super-8 film in the video field is where a television spot has been shot in videotape, and is so successful that the client or agency wants to have a Super-8 film print to show in rear-screen projectors. Since all film transfers from videotape are in 16mm, National first shoots in that format and then has reduction Super-8 film prints made. Since the film is only being shown on a small screen there are no television lines showing, and it looks as if the TV spot had been shot originally on film.

National Video Center is offering a service to its clients of renting the new Kodak Supermatic 200 Super-8 single-system sound camera which operates at 24 frames per second. Both 50-foot (2 minute) and 200-foot (10 minutes of shooting time) are available for this camera.

With the use of this camera, ad agencies can shoot on location such as supermarkets and do many test commercials at very low cost. One such

SUPER 8 RUSHES
Transferred To Video
CASSETTE
with precision electronic
EDITING

BILL KING
Editorial Services

Film
KEM 8-plate
Universal
Editing
Console


Video-tape
In-House
Spectra-Vision
Electronic Editor

18 West 45th St.
Room 619
New York, N.Y.
10036
Tel. (212)
986-5707



Uhler Cine Printer

Price: \$500.00 F.O.B. DETROIT.
Single or Double Super 8, standard 8, and 16MM Films for sound and picture prints

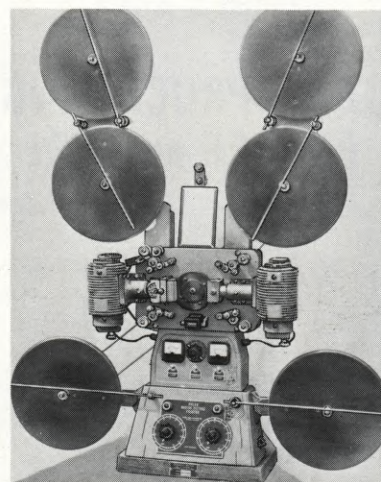

Model CCP 16-8-S8
PRICE: \$4,500.00 f.o.b. Detroit
Uhler Continuous Contact Printer

For 16, 8, and Super 8MM Sound and picture, color — B & W single or double system. Construction heavy cast aluminum, 4 sprockets with roller for feed & take-up, 1 large sprocket at aperture for steady and sharp prints. Sprockets interchangeable for super 8. Capacity 6 — 1200 ft. flanges. Semi-automatic light change.

Deposit 25% with domestic order
Letter of Credit in local Bank on Foreign
UHLER CINE MACHINE CO.

15762 Wyoming Ave.
Detroit, Mich. 48238

Phone: 313-861-4663 Cable: UHLICIMA

MUSIC MOODS FOR FILM

This record is a comprehensive MOOD MUSIC LIBRARY, designed specifically to meet the needs of low budget feature films, independent film makers, film classes, and any kind of production where

COMMERCIALLY LICENSED

music is required.

Almost every basic film mood is covered in one comprehensive record and contains electronic music, multiple guitars, solo flutes, rock, jazz, etc.


Price of \$49.95 grants ownership of the record itself, and a 3 year license for the commercial use of the sounds contained on it.

MELAINE PRODUCTIONS

114 WEST MT. PLEASANT AVE.
LIVINGSTON, NEW JERSEY 07039

NEW magnetic sound reader
Completely self contained
Sound head, Amplifier, Speaker
All in the same cabinet.

Complete price \$99.50
Write for illustrated literature
SATELLITE FILM, INC.
P.O. Box 650512
Miami, Fla. 33165



SUPER-8 SYNC HEADQUARTERS

EVERYTHING IN SUPER-8

Equipment for Filming, Editing,
Recording, Transferring, Etc.

DEALERS FOR SUPER8SOUND

Complete Transfer Service

BRAND NEW!!!

ELMO MARC 300 S-8

Theater Bright Projector
For Only \$1249.00
Dealer inquiries invited.

VALLEY PROJECTION AND CAMERA

2227 West Olive Ave.
Burbank, CA 91506
1(213) 842-3576
New Fall Catalog \$1.00

INTER- FORMAT

16mm and super 8
effects · titles · aerial image
blowup · reduction

Box 11005 San Francisco 94101

commercial was shot recently by National Video Center to show the feasibility of the concept.

Ten rolls of the 50-foot cartridges were shot in one hour on Kodachrome, processed the next day by Kodak, transferred to 2-inch quad videotape the next day. That same day the spot was edited on quad tape, titles and special optical effects put in, and a finished 60-second spot was transferred to both quad and a 3/4 inch videocassette for ad agency personnel and key clients to view before they proceeded to shoot the final commercial with conventional videotape color cameras.

Super-8 is not just a scaled-down version of 16mm, which has become the mainstay of local TV film programming. It is a new medium with its own special features. Experts feel that it will not replace 16mm film any more than 16mm film has replaced 35mm film, but it will definitely find more and more uses in professional areas such as in education, cable television, small-market stations and remote stringer operations, and many other areas of modern day life where an automatic, light-weight combination camera-recorder can be easily operated by one person.

To even an untrained eye, there is a noticeable quality-difference between a film shot with 16mm and one shot with Super-8 when viewed one after the other on a broadcast-quality film chain. However, where the Super-8 film is not going to be directly compared with 16mm, an electronically enhanced Super-8 production is more than satisfactory. Since a loss of resolution is only noticeable in the higher picture-frequencies, one should avoid shots with a great amount of detail and concentrate on medium shots and close-ups.

Super-8 film will eventually provide an additional input to television from sources such as amateurs, community groups, scientists, educational institutions and industry, and Super-8 equipment packages will be considered by small television program originating points as an alternate to other means (16mm or video) of gathering and editing program materials requiring a much larger capital investment for equal quality. ■

(ABOUT THE AUTHOR: ALAN ROGERS is the Vice-President of Marketing at National Video Center — the country's foremost lab doing Super-8-to-Video transfers. Rogers was involved in 8mm productions for many years before helping form the National Video Center, and was a founder of the Professional Super-8 Institute in New York City.)

Newsfilm Lab Super 8

PROFESSIONAL LAB SERVICES

OPTICAL PRINTING

Super 8 & 16mm service

- ★ Freeze, hold & step frames
- ★ Crop ins & zooms
- ★ 18 to 24 frame conversions
- ★ Frame line adjustments
- ★ ECO masters from A&B rolls
- ★ Reductions-blowups-silent-sound
- ★ Special effects

PRINTING & PROCESSING

- ★ Ektachrome developing to ASA 500
- ★ workprints with edge numbering
- ★ A&B printing for dissolves and fades
- ★ sound striping and transfer
- ★ Laminated VITATONE Striping
- ★ Pre-striped Prints
- ★ Low Contrast Masters

SEND FOR NEW PRICE LIST AND BROCHURE



NEWSFILM LABORATORY, INC.
516 N. Larchmont Blvd.
Hollywood, California 90004

(213) 462-6814

SMITH-VICTOR Model K50 QUARTZ STUDIO KIT



The new K50 Kit features two new quartz lights, Model 760 600 watt fill light and Model 770 600 watt broad light. Kit contains 1 760 fill light and 2 770 broad lights, 3 771 barn doors, 3 SA28 8' stands, 2 712 scrims, 3 DYH lamps and 650 carrying case.

Available through Professional Photo Suppliers and CC Video Dealers.

Model K50 \$375.00 (1,800 watts)
Write for information on other Kits

AT YOUR PROFESSIONAL DEALER

SMITH-VICTOR CORP.
Griffith, Indiana 46319

16mm • 8mm • Super 8
EKTACHROME PROCESSING



**Super 8 Optical
and Magnetic Sound**

**COMPLETE
FILM SERVICES**

- 35mm Color
- 16mm wet gate blow-ups to 35mm—fully corrected.
- 35mm to 16mm—16mm to 8mm or Super 8
- Processing—Printing—Editing
- Sound Transfer—Sound Striping
- Super 8 to 16mm

SAME DAY SERVICE


24 Hour Processing
Coast to Coast Service
Send for Price List



1138 No. La Brea
Hollywood, Ca. 90038
(213) 467-1118

**AMERICAN
FILM INDUSTRIES, INC.**

K-B EDITOR

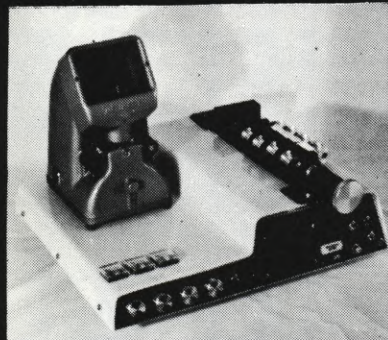

Total Capability

**EDITING CONFORMING
MIXING DUBBING**

Now you can mix three tracks into one with your recorder or double system projector. K-B EDITOR has individual VU meters for complete mixing and recording control.

**NO DUBBING
THEATRE
REQUIRED**

16mm \$1495 Super-8
For technical details write:
SPECIALTIES DESIGN & MFG. CO.
3429 Encina Drive Dept. 2
Las Vegas, Nevada 89121
Phone: (702) 451-5290

SUPER-8 IN TELEVISION
Continued from page 1324

superior frequency response capabilities of the ferric oxide stripe over the ferric oxide cassette under similar conditions. All of Eumig's HQS projectors (High Quality Sound) are now shipped from the factory with individual lab graphs certifying the machine's frequency response to 12 kHz at 24 fps and 10 kHz at 18 fps. Tests at KDUB have shown that the frequency response is more than adequate for conventional news filming when proper sound recording techniques are used. Another important factor that has improved the status of 18 frames per second in television is Kodak's Videoplayer, which is capable of converting the 18 fps footage to the 30 fps rate of the NTSC system with no noticeable flicker or speed change. The original intent of the 18 fps rate was greater economy to the consumer, and this bonus drops the raw stock cost of high-speed color Super-8 sound film down to \$1.25 a minute (vs \$1.65 a minute @ 24 fps). The higher packing density on the film also shortens the effective processing time.

Numerous other manufacturers now have 18 fps XL sound cameras on the market, including Bauer, Bolex, Bell & Howell, Chinon, GAF, Elmo, and Sankyo. In terms of lowest price, the Kodak Ektasound 130 can be found in discount camera stores for about \$150.

While Polaroid continues to file patents for various instant-processing Super-8 systems, Eastman Kodak recently began deliveries on another new professional product designed exclusively for Super-8: the Supermatic 8 processor. Well aware of the unpleasant mess and odor that often accompanies conventional film processors, Kodak set out to design a totally automated processor that could be easily operated by unskilled personnel. Originally slated for introduction in 1974, the machine has been held up by Kodak's determination to market a near-foolproof product. The packaging of the Xerox-size machine is attractive, and the installation is like that of a household washer (220 VAC, cold water, and a drain). The light-tight Super8 cartridge is loaded directly into the processor, eliminating the need for a darkroom. A roller transport is used; thus, there is no leader to thread through the tanks as in conventional processors. The machine operates at 10 feet per minute, producing a completely processed 50-foot roll in 13½ minutes. One of the innovations on the Supermatic 8 is its automatic chemistry control: an internal clock

Be ready for anything...



with an **POCKET TOOL KIT**

24 items designed to help you out of whatever you're into.

- | | |
|--------------------------|----------------------|
| 1. large blade | 13. wood saw |
| 2. small blade | 14. fish scaler |
| 3. cork screw | 15. hook disgorger |
| 4. can opener | 16. ruler |
| 5. small screwdriver | 17. nailfile |
| 6. cap lifter | 18. metal file |
| 7. screwdriver | 19. nail cleaner |
| 8. wire stripper | 20. metal saw |
| 9. reamer | 21. fine screwdriver |
| 10. scissors | 22. key ring |
| 11. Phillips screwdriver | 23. tweezers |
| 12. magnifying glass | 24. toothpick |

1825 NE 149 Street Miami, Florida USA 33181
305/945-1111
Telex 51-9348
TWX 810/845-4242



**IMAGE
DEVICES
INCORPORATED**

SHOOTING IN CANADA?
Contact Jim Grattan for top equipped crews. Single and double system.
GRATTAN PRODUCTIONS
4606 St. Catherine Street, West
Montreal H3Z 1S3, P. Q. Canada
(514) 932-1463

IN CANADA

Century
LENSES

"THE WORLD'S FINEST"

Write to us for details.
DEALER INQUIRIES WELCOME.



Leica
CAMERA SUPPLY Ltd.

1055 Granville Street, Vancouver 2, Canada
685-5331

MA-11

HEADS REBUILT

ONE-DAY SERVICE

**Reasonable
Prices** * **Fully
Guaranteed**

**MOBIUS
CINE
LTD.**



7 E. 47th St.
NYC 10017
(212) 758-3770

ALL MODELS
STEENBECK & KEM RENTALS
My Cutting Room or Yours or Location
PRE : Production Services : POST
Call: GARY JACOBSON INC
(213) 456-2842

Beaulieu

8 & 16mm



FAST
dependable
cine service

**AUTHORIZED Factory
Trained Technicians**

Hans 
Camera Repairs

(213) 344-7900

18146 SHERMAN WAY
RESEDA, CALIFORNIA 91335

counts the footage in the cartridges processed, and a sound alarm warns when the 5,000-foot mark is reached. Then at the push of a button, the machine flushes the depleted chemistry and starts a clean-up cycle. At the completion of this cycle an "ADD CHEMICALS" sign lights up, cuing the operator to add the liquid concentrates. Only four chemicals are required, and each concentrate comes in a different shape-coded size to insure that the right bottle is poured down the right hole.

The price of the processor is a hefty \$12,500, but this figure is well in line with comparable installations requiring external plumbing and supply tanks. ENG has its counterpart to the expensive processor also: an electronic signal processing device called a TBC (Time Base Corrector) which brings the ENG video tapes up to broadcast specs, also priced in the neighborhood of \$12,000.

The Supermatic 8 is designed to handle the new Ektachrome SM 7244 film introduced by Kodak in 50 and 200-foot cartridges. The film is not unlike the new Ektachrome 7240 video-film, in that both films are pre-hardened in manufacturing, eliminating the pre-hardener and neutralizer steps in processing. The 200-foot cartridge is slowly starting to make its way to the market. Kodak's Supermatic 200 and Sankyo's XL 40S sound cameras are designed to take the cartridge, and Beaulieu is reportedly working on a camera to accept it also. Like the 50-foot cartridges, the 200-footer is constructed of lightweight, disposable black plastic. Two hundred feet of Super-8 yield 10 minutes at 24 fps and 13:20 at 18 fps.

Some of the professional editing equipment required for using Super-8 in broadcasting has been on the market for several years now. Cement or tape splices may be used, although extensive testing at KDUB indicated cement splices were to be preferred. Maier-Hancock has been manufacturing a Super-8 hot splicer closely styled along the lines of its 16mm model; Guillotine also makes comparable professional tape splicers.

Good Super-8 viewers have always been somewhat of a scarcity, and practice at KDUB indicated that there was virtually only one viewer which could be compared to the Moviscop for brilliance, clarity, ruggedness, and film handling: the Minette, distributed by the Hervic Corp in the US. While it is possible for any handyman to mount a magnetic head on the viewer with an 18-frame advance, Hervic has announced that the Minette will soon be

RAW FILM STOCK

EASTMAN KODAK		
16mm EKTACHROMES	100'	400'
ECO 7252	\$7.95	\$31.00
7256, 7241, 7242	7.70	29.60
above with mag stripe	8.30	32.40
7247 Color Negative	8.69	33.00
7254 Color Negative	6.90	26.00
Black & White Reversals	4.60	17.30
Black & White Negative	3.45	13.80

MAGNETIC SOUND RECORDING

New 1200' 16mm	\$15.50
New 1000' 16mm	12.95
Reclaimed 0-3 Splice	10.75

EDITORIAL FILM LEADERS

		16mm	35mm
Opaque Leader 4.0 Den.	\$23.40	\$31.90	
White Leader	13.90	25.60	
White Leader Splice	12.00	20.00	
Academy Leader	37.50	43.35	
Fill Leader	3.25	3.25	
Clear Leader	5.50	7.50	

VIDEO TAPE

2", 1", 3/4" Cassettes Call for Prices

studio film exchange, inc.

**BUY & SELL
FILM & VIDEOTAPE**



366 W. 46th St. N.Y.C., N.Y. 10036
212-265-3740

11555 Ventura Blvd. Studio City,
CA 91604 213-985-3303



PROFESSIONAL
UNDERWATER
PHOTOGRAPHY

(415) 841-0555

At Giddings Enterprise
6853 Buckingham Blvd., Berkeley, CA 94705

**ADOLPH
GASSER INC**
SALES • SERVICE • RENTALS

ARRIFLEX
BOLEX
CINEMA PRODUCTS
CINEMA BEAULIEU
ECLAIR
NAGRA
COLORTAN
LOWEL
MILLER TRIPODS
O'CONNOR
MAGNASYNC / MOVIOLA

SCREENING ROOMS
SHOOTING STAGES

THE EXCLUSIVE
NORTHERN CALIFORNIA
REPRESENTATIVE FOR

PANAVISION

181 SECOND STREET
SAN FRANCISCO
CALIFORNIA • 94105
(415) 495-3852


angénieux service corporation of california
13381 BEACH AVE., VENICE, CALIF. 90291 • (213) 821-5080



FACTORY SERVICE CENTERS
REPAIRS • PARTS
ACCESSORIES

angénieux corporation of america
ISLIP AIRPORT, BOX 340, RONKONKOMA, N.Y. 11779 • (516) 567-2424

WESTHEIMER Company

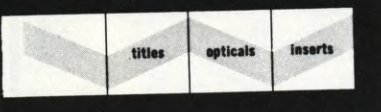

Joseph Westheimer, A.S.C.
TITLES, TRAILERS, INSERTS AND OPTICAL EFFECTS
FOR MOTION PICTURES AND TELEVISION
HO 6-8271
736 Seward St., Hollywood, Calif. 90038

**FOR THE FINEST
REFLEX BNC
SEE CSC**

**KINGSWAY:
CANADA'S
POST-PRODUCTION
EQUIPMENT
SPECIALISTS.**

Featuring
**STEENBECK • BAUER
PRECISION • MURAY**

For more information on all our fine equipment
contact:

 **Kingsway Film Equipment Ltd.**
821 Kipling Avenue, Toronto, Ontario
M8Z 5G8 Phone: 416-233-1103

ROSCO
color media
ROSCO, PORTCHESTER, N.Y. 10573

**Editing Facilities
Equipment Rental**

Kems, Steenbecks &
Moviolas

**PREVIEW
THEATRE**
INC.

1600 BROADWAY, NEW YORK, N.Y. 10019
(212) 246-0865

available with a magnetic sound-reader attached. Elmo and Bolex are also marketing Super-8 viewers with a modular sound head for single-system sound editing.

There's no denying that the editing stage of Super-8 requires a lot of care and patience. Handling is not quite as easy as 16mm, although one can become accustomed. The sound advance is so close to the picture at 24 fps (less than a second) that very clean single-system edits can be made if proper techniques are used in shooting. Cleanliness is extremely critical, as dirt, dust, and film shavings are very noticeable when the film is blown up on a large TV screen. Scratches automatically add to a poor impression of the film.

At the point of transfer to video the broadcaster has a choice of two routes; the conventional method has been to use a special TV projector equipped with a 5-bladed shutter and synchronous motor. Both Eastman Kodak and Elmo are marketing such projectors. They are limited to running at 24 frames per second, and must be projected into a telecine chain for pick-up by a color TV camera. Telecine chains are standard equipment in TV stations, but oftentimes all of the normally available "inputs" are used up by other types of Projectors (16mm film, 35mm slide, etc). Such was the case at KDUB's installation. However, the problem was solved by adding a fifth mirror to the chain. (Note: Engineers with the CBC used a similar approach in the Montreal installation).

Image enhancement is a critical factor in the conventional film chain approach. Until recently, most film chains were not equipped with enhancers, so in many cases an external enhancer is required when Super-8 is used. This device examines the television signal on a line-by-line and dot-by-dot basis to detect detail and increase its contrast; the net effect is a sharper picture. Photos accompanying this article demonstrate how enhancement can improve the Super-8 image. The accompanying cartoon photo(s) show a comparison of an un-enhanced 16mm print with an enhanced Super-8 print (both photos were shot from a TV screen). Enhancement makes the Super-8 appear sharper, though somewhat coarser and grainier. The appearance of grain is normally increased with enhancement, but much of this high-frequency noise is lost in the home receiver. Electronic image enhancement has been the single most important factor in bringing the Super-8 image up to broadcast standards.

**R-2 Reflex Auto-
COLLIMATOR**

Focus Testing Equipment is made by
RICHTER CINE EQUIPMENT, ESSEX, N.Y. 12936
for people who care about image quality.
Cost? Less than one good lens or
one out-of-focus scene.

**flip
schulke
underwater
films**

In association with Black Star Productions, Inc. Complete facilities for all types of expert underwater and topside filming and production.

For Information: Benjamin J. Chapnick 450 Park Avenue South New York, N.Y. 10016 (212) OR 9-3288 Miami, London




**FILMING FACILITIES
ASIAN FILMS**
72, JANPATH, N. DELHI-1
Cable: Moviphoto,
New Delhi (India);
Telephone: 44040

For Professional Equipment in
PHILADELPHIA,
it's
O. H. HIRT, INC.
39 N. 11th St. • Phila, Pa 19107
(215) 629-8560

**NOBODY makes BETTER 16mm
COLOR POSITIVE PRINTS
— than TEKNIFILM !**

- Small enough to give you
PERSONAL ATTENTION
- Large enough to meet your
DEADLINES—40,000 ft./shift

 **TEKNIFILM, INC.**
1923 N.W. Kearney • Portland, Oregon 97209
Telephone 503/224-3835

TRY US ON YOUR NEXT PRINT ORDER

BOLEX ACCESSORIES

- 24-Frame Sync. Camera motor—115V
 - Var. Speed Battery Camera motor—24V
 - 400-ft. Magazine w/400' counter in camera
 - Interval timer—Range 1½ sec. to 36 min.
 - Animation motor for new single-frame shaft
- Write for Bolex Accessory Catalog
STEVENS ENGINEERING CO.
P.O. BOX 1605,
NEWPORT BEACH, CA 92663

EDITING CONSOLES

2 picture, 3 sound
modestly priced

Twenty-Fourth Frame
p.o. box 5381, Redding, Va. 24080 (703) 544-7166

FOR CHALLENGING FEATURE **LOCATION** PRODUCTION IN SOUTHEAST, SOUTHWEST, MIDWEST
HIRE A PROVEN LOCATION SPECIALIST!
JOHN O. EVANS
DIRECTOR OF PHOTOGRAPHY, IATSE
219 Drake Ave., Huntsville, Ala. 35801 (205) 883-0875
FULL CREW AVAILABLE

BEHIND-THE-LENS FILTER HOLDERS

For Angenieux lenses on all Arriflex 16, Eclair NPR and CM3 cameras, and for the 25-250 Angenieux for 35 mm - in kits with gel cutter, tweezers, spare gel container and other convenience features.

Ask for brochures

CUSTOM PHOTOGRAPHICS

P. O. Box 25007, Portland, Oregon 97225 • 503-292-5569



FilmLab SERVICE, INC.
FULL SERVICE 16mm. LABORATORY

INTERNEGATIVE
EASTMAN COLOR
POSITIVE

- PROCESSING — ECO — EF — B&W
- ADDITIVE COLOR PRINTING
- EDITING • SOUND SERVICE
- EDGE NUMBERING • VACUUMATE
- ULTRASONIC CLEANING
- FILMSTOCK • SUPPLIES

CALL COLLECT (216) 881-4510
4019 PROSPECT AVE. CLEVELAND, OHIO 44103

NEW ZEALAND

And The South Pacific


Location & Studio Production Facilities / Mitchell, Arriflex & Eclair Cameras / Helicopters & Fixed Wing Aircraft / 35 & 16mm Footage From Stock or Shot to Order / Location Finding

GEORGE & ASSOCIATES LTD.

CPO Box 3061 Auckland. Telephone 766-049
Cables, Georgefilm
Telex Seek AKNZ 2901 Georgefilm

AUTOMATIC DAYLIGHT PROCESSOR

- Processes up to 200 Ft.
- Super 8 to 105mm
- Movie—X-Ray • Microfilm
- Motor Driven—Portable
- Film Dryers Available
- Guaranteed



Write for Free Literature
OUR 28th YEAR

Micro Record Corp.

487-14 South Ave., Beacon, N.Y. 12508

IN CANADA

Complete 16mm & 35mm color & b/w processing and printing. Eastman COLOR Ektachrome processing. Magnetic sound stripping for 16mm-8mm and Super 8mm. Vacuumate film treatment. 16mm Optical Transfers.


QUEBEC 1085 St. Alexander St., Montreal, Quebec
FILM LABS Telephone (514) 861-5483

Let the PRO'S tell you How to Buy a
16mm Sound Projector.

FREE

We will send you the article which appeared in FILMMAKERS NEWSLETTER on Buying a "Used Projector."

HECHT—Box 443—Ellenville, N.Y. 12428



**HOLLYWOOD'S OLDEST
FILM SCHOOL**
NOW ACCEPTING ENROLLMENTS
FOR OUR NEXT

MOTION PICTURE COURSE
CAMERAS • SOUND RECORDING
LIGHTING • EDITING • EFFECTS
COMPOSITION • SCRIPTING • ETC.

Two Week Courses— Evening Classes

**DANNY ROUZER
STUDIO**
7022 Melrose Avenue, Hollywood, California 90038
Request Brochure HC (213) 936-2494

The alternate approach to using a TV projector is to use Kodak's new Supermatic videoplayer. This remarkable device defies adequate description, especially when one considers that it does the job of both the TV projector and color TV camera, and yet costs less than either! Priced at an astounding \$1,350, the videoplayer is capable of matching the color quality of color TV cameras costing as much as \$35,000! As incredible as it sounds, the videoplayer is entirely capable of this because of the approach used in the transfer process.

Technically the device is called a flying-spot scanner, and because of its inherent advantages of perfect color registration and color uniformity, it's used quite commonly in Europe for broadcasting film. Until recently US broadcasters have been unable to use the approach because of incompatibilities between the film frame rate (18 or 24 fps) and the American NTSC television frame rate (30 fps), but unique technology perfected by Kodak with assistance from Sylvania has solved the problem. A look inside the 45-pound box will show a small 4-inch TV screen which is used to illuminate the film instead of a conventional projection lamp. The raster light is cool, so there is no danger of heating or burning the film as in conventional projectors. If one could examine the TV screen in slow motion, he could see that it is simply a "flying spot" of light transversing the screen line by line. When the traveling spot of light shines through the film, it is picked up by three photocells, each responding to one of the primary colors. The resulting photocell signals are then combined to form the NTSC television signal.

The real technical accomplishment in the videoplayer is the traveling raster which allows the film to travel at a continuous rate through the player. To accomplish this, a specially elongated film gate is used, and complex sync signals are employed to force the raster to move and follow the film frame as it moves through the gate, until the entire frame has been scanned or illuminated. This process eliminates nearly all film wear, and provides for much quieter operation, but it produces the side effect of frame jitter if the controls are not properly adjusted. Both focus and steadiness controls on the player contribute to timing the raster speed to the film speed so that minimum jitter occurs.

The video output signal of the player is amazingly sharp — sharp enough to show the grain clearly — and this is due in part to the horizontal image

A COMPLETE

16mm MOTION PICTURE LAB.

OVER 32 YEARS EXPERIENCE

Use Specialists to Make Your Color Prints

Pioneer in 16mm color negative-positive printing and processing • Color additive printing • Edge Numbering • Cutting Rooms available • Same day service on Kodak and B&W reversal dailies
"Clients throughout the entire world"

CRC Mark of Quality

Color Reproduction Co.

7936 Santa Monica Blvd. (213) 654-8010
Hollywood, Calif. 90046

BLOW-UP

HIGH QUALITY
35MM NEGATIVES
FROM YOUR 16MM ORIGINALS

Stock Shots Enlarged to Match-in with your 35mm Negative
Complete Pictures Transferred to 35mm

Call—Adrian at (213) 463-3178

CINESERVICE, INC.

1459 North Seward Street
Hollywood, California 90028

CALL A PROFESSIONAL Cine-Craft, Inc.

A full service laboratory for
16mm, Super 8, Regular 8
Any quantity Best prices

8764 Beverly Blvd., Hollywood, Calif. 90048
(213) 652-7357
Write for free brochure



Sea Systems

UNDERWATER CINEMATOGRAPHY
ARRIFLEX - VIDIEO - NIKON

415-531-0493

2220 PELHAM PLACE, OAKLAND, CALIFORNIA 94611

Covering FLORIDA
like the SUNSHINE—



COMPLETE RENTAL SERVICE

PHOTOMART

CINE EQUIPMENT SUPPLIERS
6327 S. ORANGE AVE. • ORLANDO, FLA. 32809

Phone (305) 851-2780

enhancement that is included in the machine's electronics. An RF modulator is also built into the player, allowing it to be used with consumer TV sets when desired.

As mentioned earlier, the video-player is capable of transferring film shot at either 18 or 24 fps; in fact, the player is actually capable of transferring film shot at any speed if the proper adjustment in the drive motor's speed is made. The first model introduced by Kodak, the VP-1, carries a standard video output and can be used for basic transfers to a quad tape machine or any other type of video recorder, but for synchronous operation with the rest of a TV station's equipment the second model, VP-X, is required. Priced at only \$1,250, this version contains a variety of sync inputs in the back for driving the player in sync with other studio equipment.

This review of new products and technology is clear proof that professional Super-8 has now arrived on the scene, and is ready for broadcasting. Two solid years of experience with the format at KDUB have shown that with care and quality control, the enhanced Super-8 image can compete quite well as newsfilm. A side-by-side comparison will show the picture quality of Super-8 very close to that achieved with the 1/4-inch Akai system. Color porta-paks near the size and price of Super-8 sound cameras are light-years away, and this simple fact is what will keep Super-8 alive as a viable option in television. Competition from ENG and 16mm is going to be tough in the future, but with automation and innovation as the cornerstones of the Super-8 system, professional Super-8 is ready for the challenge of television now. ■

(ABOUT THE AUTHOR: CHUCK CYBERSKI has been a long-time advocate of the Super-8 format as a publisher of the pioneering "Super-8 Research News". He was Operations Manager of KDUB-TV, Dubuque, Iowa from 1972 to 1974, during the start-up of the first all-Super-8 TV news department. He is now an independent writer and consultant.)

BUY-SELL-SWAP

Continued from Page 1357

SERVICES AVAILABLE

LOCATION recording throughout the world. Either stereo or sync. JACK CLINK (703) 521-8282. Cable address: CLINKSOUND.

HIGH QUALITY OPTICALS 16, 8, 35, S16, titles, CRI, 16 to 35 blowup, all effects. Mike Shannon (415) 397-0172 or write, 592 Chestnut St., San Francisco, CA 94133.

INDIA & SOUTH PACIFIC ITINERARY Cinematographer with industrial/documentary experience leaving mid-February 1976. Will do record photography or full production. Inquiries: CHARTER FILM PRODUCTIONS Box 336-Station "P", Toronto, Ont. Canada (416) 964-6674.

SITUATIONS WANTED

INTERNSHIP with Cinematographer wanted. Creative young filmmaker experienced in cinematography, sound, and editing, 16mm & 35mm. MA film production. Desires professional experiences. Resume available. DAVID PARRISH, 221 E. Church # 5, Iowa City, IA 52240 (319) 353-4403.

SOUND VIRTUOSO If you share my conviction that almost all sound tracks are of indifferent quality, and if you're planning an unusual movie, we should talk. I will deliver an exceptional sound experience in the theater — not just the mixing studio. Spectacular sound creations must begin BEFORE the moment of recording. WILLIAM BLACHLY, 67 Park, NYC 10016.

WANTED

ARRI-S with constant speed motor, 400' mags with torque motor or Auricon conversion. Will consider trade for above. COLUMBIA COLLEGE, (312) 467-0300 Attn: Horace Jimerson.

FILM STOCK, 16/35mm will consider all types. Sealed, opened and ends. RAFIQUE, 814 Broadway, NYC 10003, (212) 228-2757/475-9110.

EQUIPMENT WANTED: 16mm Mauer Camera (05 Model) body only preferred. Contact: Dan McLaughlin, Theater Arts Dept. University of California at Los Angeles, 405 Hilgard Ave., Los Angeles, CA 90024 (213) 825-5829.

RAW STOCK FILM NEEDED. Highest cash paid for 16 or 35mm color negative or reversal film, including any EF (7242) mag. stripe, B&W reversal also wanted. FILMEX, (Filmbrokers) (416) 964-7415 collect.

WANTED: Professional motion picture equipment, 16mm and 35mm. Cameras, lenses, lights, sound, editing, projection, lab. For outright purchase or consignment. Supply complete technical description and price for immediate reply. Ted Lane, ALAN GORDON ENTERPRISES INC., 1430 Cahuenga, Hollywood, CA 90028, (213) 466-3561.

WANTED: Nagra or other sync recorders plus accessories, immediate cash, no hassle. RICHIE (212) RA6-6832.

WANTED 8 plate Kem Universal set up with 16 or 16/35 modules. Call BLUE RIDGE, 1020 N. La Brea Ave., Hollywood CA, 90038 (213) 461-2846.

FILM, Unexposed, ends or new rolls 16 or 35mm. Please contact for prices, Renee Ross, STUDIO FILM EXCHANGE, 11555 Ventura Blvd., Studio City, CA 91604 (213) 985-3303.

WANTED: Stock footage, 16mm color, of "Delta Queen" and "Admiral Mississippi" river boats cruising on the river; an oil fueled yard locomotive; steam pile drivers; off shore oil rigs. Write: FILM PRODUCTION WORKSHOP, P. O. Box 254, Abington, PA 19001.

WANTED

WANTED: Used animation stand at modest price. Write: FILMS FOR CHRIST ASSOCIATION, Eden Road, Elmwood, IL 61529 or phone (309) 565-7266.

WANTED literary property for feature horror film. Please submit only copies. THE EDITING COMPANY, 1828 South Marion St., Denver, CO 80210.

MISCELLANEOUS

Private collection 100, 200 ft. 8mm B&W stag negatives \$1000. (215) 252-2911.

Going film processing business for sale, no competition. Over 100 schools, colleges, pro-football and basketball. Retiring because of age, \$35,000. DULLNIG FILM CO., 331 Shannon Lee, San Antonio, TX 78216. 828-4017.

CINE-SHOPPER classified ads reach 10,000 serious filmmakers. To sell, trade, buy equipment or services send 20¢ per word (\$5 min.) with ad to: COMQUIP, INC., 366 S. Maple Ave., Glen Rock, N.J. 07452.

ARCHIVAL color separation 16mm masters from reversal and negative originals. INTERFORMAT, Box 11005, San Francisco, CA 94101.

EVERYTHING YOU WANTED TO KNOW ABOUT SUPER 8

BUT DIDN'T KNOW WHO TO ASK! If you're thinking about Super-8 production you'll want to talk to the people who know Super-8. From cameras, sync sound recorders, lighting, and other production techniques and equipment, to editing, sync sound resolving, multi-track mix downs, release printing and projection equipment including film and video, we can help you select the right equipment at the right price. And our help doesn't end with the sale. Our Super-8 production people are available to help you with your questions or problems. Shop around then give us a call. CINEMA SYNC SYSTEMS, INC., 12625 Santa Ana Place, Chino, CA 91710, (714) 627-4612.

MOVIES FROM SLIDES

Dissolves, Pans, zooms to areas as small as 1/4", using computerized Oxberry Animation Stands. Send for information, free film chart, pocket slate, field guide and sample film.

Animated Productions, Inc.


1600 Broadway (212) CO-5-2942
New York NY 10019

ARRIFLEX
Motion Picture Equipment
NAGRA
Tape Recorders
IANIRO
Lighting Equipment

Exclusive Distributor in Canada:
BRAUN ELECTRIC CANADA LTD.
3269 American Dr., Mississauga, Ontario, Canada
(416) 678-9200. Write for price lists and brochures.

MULTITRACK STUDIO RECORDING SYSTEMS

IN CANADA



(403) 328-1346

locations

services

1242 Fifth Avenue So.,
Lethbridge, Alberta T1J 0V5



THE VIRGIN ISLANDS INTERNATIONAL FILM FESTIVAL

"THE FESTIVAL OF THE AMERICAS" NOV. 7-16, 1975 U.S. VIRGIN ISLANDS

FOR ENTRY KIT AND POSTER, TEAR OUT THIS AD AND AIR MAIL TO:
THE VIRGIN ISLANDS INTERNATIONAL FILM FESTIVAL AND FILM MARKET/DRAWER V.I.F.F./U.S. VIRGIN ISLANDS 00801

BUY — SELL — SWAP HERE

STUDIO PRODUCTION EQUIP.

FILM Processor, Hills 16mm 7381 & 7271 films. 82 ft. per minute. No track applicator, only 1 year old and in excellent condition. \$13,000. HILLS MFG. CO., INC., Box 125, Chalfont, PA 18914 (215) 345-1944.

SURPLUS STUDIO EQUIPMENT SALE

A complete re-recording and editing facility, consisting of 35mm and 16mm interlock equipment. Complete to the last detail. All RCA and Westrex components. Inventory far too much to list here. Send for our complete inventory list. WARREN SOUND STUDIOS, 35 NE 62nd St., Miami, FL 33138 (305) 754-9539.

SIEMENS 16mm single-system opt/mag projector, \$900. EVENINGS (714) 276-2490.

ARRIFLEX 16M camera, mint condition with lenses, magazine, carrying case, tripod, time lapse. Editing equipment. DeBrie 16: 4x Super-8 optical reduction printer. 35/16mm B&W Treise developing machine. VISUAL EDUCATION, INC., P.O. Box 6039, Santa Barbara, CA 93111.

1906 power projector, 35mm. Best offer. LINDENHURST, NEW YORK (516) 226-7320.

ARRI-16—S, 17-85 Pan Cinor, 50mm Cooke Kine-tal, matte box, 400 ft. magazine, variable-speed motor, take-up motor, Arri battery pack, cord, \$2,950. Call (617) 369-8550.

BOLEX H-16, Rex 5, Beautiful, 3 Macro Switars, Rex-o-fader, 12-120 Angenieux, like new (316) 262-0875.

ARRI M, 16mm, 2 mags, absolutely mint condition. (213) 678-0163.

AURICON sound rig. Yoder conversion, Angenieux 12-120, MA-11, 3 magazine, \$2500. 4801 Crockett, Galveston, TX 77550.

ECLAIR NPR — Beala crystal motor, complete 1-400' mag., 9.5-95 Angenieux, cases, hand grip, excellent condition, low mileage, \$9,000. (415) 383-7462, 52 Lovell Ave., Mill Valley, CA 94941.

16mm ARRI BL, 12-120 Angenieux zoom, 3 mags, crystal, zoom motor, battery, case, extras, \$6,950 (213) 465-3139 or 454-6255.

ECLAIR NPR, almost new with Aeton motor, 2 magazines, 12-120 zoom, battery, cases (213) 454-9903.

AURICON Pro-600, sync pulse generator, galvanometer, amplifier, (variable area optical sound,) 600 ft. magazine. Super mint condition. (303) 473-7568.

CP-16 Reflex, new 10-150 Angenieux zoom, new 9.5 Angenieux wide angle, 400' mags., MA-X1 amp with sound head, \$7,950. Call (301) 652-9535, WASHINGTON, D.C.

NEW 20-120 Angenieux zoom with Arri & BNC mounts (213) 454-9903.

WATCH OUT! Don't sign your film away. Contact MALIBU FILMS, INC., — Instructional Media — Box 428, Malibu, CA 90265.

UHER 1000 Pilotone recorder, like new. Bloop oscillator factory installed. Manual resolver, \$595 firm. WILEY GROOVER, 21 Sessions St., N.W., Marietta, GA (404) 428-6361.

HARD TO GET! Sony 3/4" U-Matic Color Video-cassette system. Perfect condition: Two 2850 Editing Cassette Recorders, RM 400 Backspacer, DXC 1600 Portable color camera, two CVM-1225 Trinitron monitor-receivers. Best offer takes. (612) 835-2292.

EASTMAN Viscomat processor with water temperature control unit, \$5,000. Bell & Howell 16mm contact color printer model 6160-A, like new, only 75,000 ft. run, \$10,000. DAN ARGENTO, 3M Company, (805) 482-1911.

25-250 ANGENIEUX 200 M, excellent condition, (213) 454-9903.

CRYSTAL sync for Nagra \$132. Universal model \$87. Postpaid, guaranteed, newest design. Why pay more for less? TOBIN CINEMA SYSTEMS 3227 49 SW, Seattle 98116.

STUDIO PRODUCTION EQUIP.

ARRI-M, CS and VS motors; 2-400' magazines with core adaptors; 12.5, 17, 25, & 50 Cooke lenses; 17-85 Berthiot zoom; 2 battery belts, matte box with filter holder, Arri case, \$1500. Firm. 5 Bolex non-reflex with 16, 25 & 75 lenses, good condition, \$200. each. COLUMBIA COLLEGE (312) 467-0300. Attn: Horace Jimerson.

DIRECT current generator 100 kilowatt General Motors 671 diesel mounted on 1970 Ford chassis, mileage approximately 8000. Unit is well-blimped, extremely quiet, generator recently completely overhauled. Hydrodolly Studio dolly with gearhead, Nagra 4.2L with condenser preamp and Dynamic preamp. Lightweight baby Brute mint condition regular lightweight brutes and old style brutes 10 kilowatt heads and 5 kilowatt heads. The above equipment of particular interest to Canadians as it is duty paid. (604) 929-5401.

ECLAIR brand new accessories for CM-3 cameras: Perfectone 24 fps DC sync motor \$1,195., metal studio blimp, \$3,500. 35mm Aquaflex mag, \$795. Standard 16mm magazine, \$795. Arri-BL perfect outfit \$6,995. Arri single system complete for BL \$1,895. Arri-S complete 400' outfit \$3,495. Arri-S metal blimp, mint \$595. Akeley gyro tripod \$295. B&H 2709 with stop motion motor \$1,900. B&H 70S hisped with 128 fps spring and AC motor \$595. Auricon newsreel camera outfit with mag-sound \$2,995. Eclair CM-3 16/35mm outfit \$1,995. Eclair NPR, newer mag, 9.5-95mm zoom, DC sync motor, Belt, cases \$5,495. Canon sound Scoopic, complete mint outfit \$2,695. Hulcher 70mm camera with 2-lenses \$1,900. Magnasync 602 16mm recorder \$1,395. Optasound self-resolving, sync cassette recorder, new \$595. Moviola 35/35 upright green editor \$1,795. Rollei TLR camera with underwater housing and access. \$795. Replica 35mm studio camera, cardboard, full size, looks real, \$15. COM-QUIP, INC., 366 S. Maple Ave., Glen Rock NJ 07452 (201) 444-3800.

ARRIFLEX 35 BL with 4 Zeiss super speed lenses, 2-400' magazines, 2-1000' magazine (213) 454-9903.

UP TO 30% of gross plus short-term distribution tie-up. MALIBU FILMS, INC., — Instructional Media — Box 428, Malibu, CA 90265.

DE VRY 35mm proj. 2/Selsyn Interlock, modified for forward and reverse operation, 4" lens, rebuilt \$1975. De Vry 35mm proj. solar cell, rebuilt, \$1250. Bell & Howell 16mm 385C, w/2" lens, \$250. Recorders, Transports, Mixers: Omega M-5 16mm reproducer w/Selsyn in rack mount, \$1375. Stencil Hoffman S-5 35mm reproducer w/sync/Selsyn motor in rack mount, less top & bottom take up motors, as is, \$725. Ampex 351 2-channel, rec/repro 1/4" 15, 30 lps in Siorpins rack cabinet, \$1625. Nagra IV LE w/case leather/medal AKS mic, headset, 2 preamps, AC power supply, \$2100. Sela 2880 production mixer w/case, \$480. Senn. 815 shotgun w/Gordon fishpole/handgrip, windscreens, case, cable, \$525. NCE fluid head w/sticks, case, triangle, \$650. MAC 75 power amp \$225. Pioneer SA 9100 power amp stereo 150 rms, \$450. B&O 3200 turntable w/dust cover, \$375. OP amp 9 cut full octave equalizer, \$225. Z-A7 Altec Lancing Voice of the Theater 85c 511 horns/crossovers \$1025. PLUS MORE & MORE. PO Box 12123, Santa Ana 92712.

ARRIFLEX 16M (new, never used); Zeiss 16, 25, 50, 135; matte box, two 400' mags, motor, battery and charger, shoulder pod, Arri tripod, aluminum case, many extras. \$6500 or best offer. S. LISSNER, 2605 Connecticut Avenue NW, Washington DC 20008; Days (202) 332-4020; Nights (202) 667-3092.

LLOYD'S FALL SPECIALS AVE 35mm Interlock proj., \$2950. Arri IIB outfit, complete, \$1950. Eyemo-open back model, \$295. Mauer 16mm outfit, \$1495. Mitchell 16mm reflex, \$3950. B&H 16mm specialist, \$450. Wall 35, like new, \$950. Mitchell standard outfit, \$1950. Vinten 35mm, rackover outfit, \$1450. DeVry 35 proj. preview fwd/rev. S. Fr. \$950. Moviola preview 35mm, \$750. Moviola 35mm D-20, \$895. B&H 2709, pilotpin, \$995. Fastax 16mm, 400 ft model, \$350. B&H 70H 16mm, open back, \$195. Baltar 25mm f2.3 unmounted, \$49.50. Arriflex M-like new, \$3950. Houston A-11 16/35 Dev. mach., \$750. Mitchell 70mm camera, \$1,000. MANY MORE NEW & USED ITEMS IN STOCK! LLOYD'S CAMERA EXCHANGE, 1612 N. Cahuenga Blvd., 467-7956 Hollywood, CA 90028.

STUDIO PRODUCTION EQUIP.

16 ARRI S, high speed (80 fps), 12-120 Angenieux zoom, 3-400' magazines, (213) 454-9903.

ECLAIR NPR, Angenieux 15-150, 2 magazines, Ciblo motor, 220v motor, batteries, case. Best offer, G. LANDOW, Art Institute School, Michigan and Adams, Chicago 60603.

NAGRA IV-S # 9952 Universal preamps, QSGX-60, QSV-2, ATN-2, QHTP, QHP, cables. Mint. \$3300 firm. (512) 892-2796 anytime.

ARRI BL with 12-120, crystal, 3 motors, 3 magazines, much more. Must sell. Best offer over \$5000. (212) 254-9824, if no answer 989-6257.

ARRI 35IIC w/sync generator 25, 32, 50, 75 Cooke lenses, 2-400 ft magazines, matte box, hi-hat, v/s motor, case, \$4800. ARRI 35IIC same as above except 25, 50, 75 Kinoptic lenses \$4200. ARRI 2b camera v/s motor, 1-400 ft magazine, 2-200 ft, 2 lenses, matte box & case \$1700. Arri 16S cameras \$1500-3000. ANGENIEUX 12-120 in Arri mount \$875. Berthiot Pan Cinor 17-85 in Arri mount, like new, \$265. 8/12 volt Duropak battery new, \$125. Sennhaiser microphones new MD421—\$135. MD214 \$130. MKH 415 \$410. MKH 815 \$495. ROESSEL C.P.T. INC., 114-12 84th Ave., Richmond Hill, New York 11418. (212) 441-4619.

ECLAIR NPR, new Alcan motor, 2-400' mag., 9-95 Angenieux, battery, body brace, like new (617) 492-5509.

B&H 70-DL, two lenses \$250. Motor \$100. Victor IV \$75. Arri S sync motor \$300. Arri S/B Pan Cinor 17-85 \$300. Arri M magazine \$325. M-H 35/16 splicer \$285. Mint black Nikon FT, 43-86 zoom, 135, \$370. # 1795 AMERICAN CINEMATOGRAPHER (213) 662-4507.

RECONDITIONED SALE

Arriflex 2B vari-speed motor, 3 lenses, 2-400 magazines, matte box, carrying case \$1975. Bell & Howell 35mm "J" printer, 1200 watt lamp house, \$3750. LDE INC., P. O. Box 38755, Hollywood, CA 90038

ECLAIR NPR Super 16, magazine, 12 volt governor, motor, cables, battery, \$5950. Eclair ACL, crystal motor, 2-200 ft. magazines, 12-120 Angenieux, battery, case, \$5950. Arri 16BL, 12-120 Angenieux 400 ft. magazine, 12-volt motor, CP Crystolok, matte box, battery, case \$6250. Mitchell 16 reflex, crystal motor, 2-400' magazines, 12-120 Canon macro zoom, case, \$5500. SAWYERS — HOLLYWOOD (213) 466-6112.

SUPPLIES

Black leader, 16mm, fresh stock processed to 4.0+, guaranteed. \$.024/ft. min. order 2000 ft. complete lab services and supplies, 16mm & Super-8, LEO DINER FILMS INC., 350 Golden Gate Ave., San Francisco, 94102 (415) 775-3664.

RENTALS

STEENBECK Rentals delivered to your premises. KLM Assoc., Inc., West coast (213) 931-6151, East coast (301) 299-7259.

PRODUCTION Equipment at sensible prices... for example \$15. per day for Nagra III recorder or 12-120 Angenieux zoom lens. The rest of our prices are just as low. For more information on rentals, sales or service write: CINELEASE, INC., 209B Old Durham Road, Killingworth, Conn. 06417 or call (203) 663-2222.

NAGRAS for rent. Nagra IV-1, QSLI, crystal, \$85 a week, \$225 a month. Nagra III, with crystal, \$50 a week, \$150 a month — call (212) 548-1439.

KEM rentals in Hollywood. HORIZONTAL EDITING STUDIOS (213) 461-4643.

HOLLYWOOD got you down? 16mm editing rooms and transfer service in smog-free Santa Monica. Moviola flatbed and upright equipment, very reasonable rates. Call (213) 828-8296 or 394-8819.

POSITIONS AVAILABLE

VICTOR DUNCAN, INC. has opening for camera repair technician. Must have practical background in mechanics, electronics, optics. Call Robert Burrell. (313) 371-4920.

Continued on Page 1356

RATES: Ads set in lightface type 40¢ per word. Minimum ad, \$4.00. Text set in lightface capital letters (except 1st word and advertiser's name) 50¢ per word. Modified display format (text set in boldface type, capitals or upper-and-lower-

case) \$4.00 per line. Send copy with remittance to cover payment to Editorial Office, American Cinematographer, P.O. Box 2230, Hollywood 28, Calif. Forms close 1st of month preceding date of issue.

Simple, Logical Control Layout.

The three buttons at left are interlock controls. Front button for front plates, center one for center plates, rear one for rear plates. *Logical.* All are independent. But all can be run by the recessed Master Control in the circle next to them.

New KEM Rapid-S six-plate: It doesn't run you. You run it. 35mm, 16mm and Super 8.


You do the editing, not the machine.
The KEM stays out of your way. Its *simple* controls free you to think creatively.



Your editing machine *must* give you sound speed. But for frame-by-frame viewing and to hear sound modulations, you *also* need variable speeds from 3 to 24 fps. For fast scanning of dialog and action, maybe 24 to 60 fps. And high speed, for rewinding in sync.

One Control Simplicity

The KEM gives you all that with *one* Control Lever. Plus an Instant Stop button *on that lever*. Instant stops, at any speed.

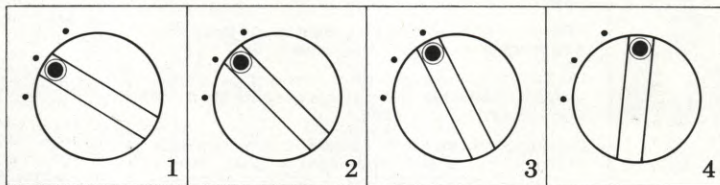

ONE CONTROL LEVER DOES IT ALL.

Infinitely variable speeds, forward and reverse. Move lever to right, film goes to right. To left, film goes to left.

In picture 1 above, the Control Lever is at Stop. In picture 2, it's moving the film and/or tracks to the right, somewhere between 3 and 24 frames per second.

In 4, it's going right at *more* than 24 frames per second. The more you move the Lever, the faster things go. Moving the lever to the left...

3 Frame Counters

Each transport has its own frame counter, independent of the others — or interlockable, of course. The Rapid-S is like a super synchronizer.

Big, Bright Picture

With KEM's optics, you can clearly distinguish one frame from another. The image stays as bright on freeze-frame. Heat filter. Image area on screen measures 8½ x 11½ inches.

High Fidelity Sound

The sound is fantastic — full and brilliant. You can play it really loud, for the feel of what it will be like in the theater. And whatever's on your track, you'll *hear* it.

Engineering Quality

Just as an example: ball bearings on every moving part. German precision. No plastic anywhere. Modular electronics. *Simple*, therefore reliable. When you're checking out the other editing machines, ask to look *inside*. Then look at the KEM.



All Within Easy Reach

The Rapid-S is 42 inches wide. The transport is the one furthest from you. Its core spins only 26 inches from table's front. *No stretching.*

Easy Manual Inching

Big, handy inching knobs are mounted on the transport path. You can inch manually with all three transports in interlock, or any one independently — or any two.

**NOW —
BETTER PICTURE,
BETTER SOUND..
AND 21% LESS
EXPENSIVE!**

Eastern United States:

MM Editing Systems Inc.
321 West 44th Street, New York
New York 10036 (212) 582-1681

Western United States:

KEM Editing Systems Inc.
6253 Hollywood Blvd, Hollywood
California 90028 (213) 461-4143

KEM

byron takes all the guesswork out of pre-release pricing

One all-inclusive
price-per-foot covers the
total pre-release services for films 200 feet
or longer... a price that saves you money!

Give us your color positive release printing and we'll provide all the following essential services from your conformed 16mm original film and mixed magnetic track—

- ✓ Transfer magnetic to optical printing tracks.
- ✓ Sync tracks to conformed original.
- ✓ Dissolves and fades.
- ✓ Answer print from original.
- ✓ Internegative or CRI for release printing.
(Color reversal negative printed optical wet gate)
- ✓ Answer print from internegative or CRI.
- ✓ Reels and cans.

... at Byron's "all-inclusive price" per foot*
F.O.B. Washington, D.C.

- from 16mm A & B roll color reversal \$0.889
(from A roll only) \$0.742
- from 16mm A & B color negative \$1.252
(from A roll only) \$1.049

Any questions? Ask us!

*Simply multiply the per-foot price times the measured footage of your edited work print—first frame of picture or sound to last frame—plus the Universal leader and ACL standard printing leaders. That's your total price, from sound transfer and answer print thru to the answer print from the printing negative. No extras!
(The above prices are based on today's lab costs and subject to change.)

byron COLOR-CORRECT®

65 K Street, N.E., Washington, D.C. 20002 202/783-2700

Complete, Fully-Integrated Film and Videotape Laboratories